

TOTAL BILL OF MATERIAL													
	POLLUTION CONTROL	CONCRETE REPAIRS	SHOTCRETE REPAIRS	FOAM JOINT SEALS FOR PRESERVATION	POURABLE SILICONE JOINT SEALANT	GALVANIC CATHODIC PROTECTION INTEGRAL PILE JACKET (MONITORING)	GALVANIC CATHODIC PROTECTION INTEGRAL PILE JACKET (NON-MONITORING)	BULK ANODE	GALVANIZED PEDESTRIAN SAFETY RAIL	PRESTRESSED CONCRETE GIRDER REPAIR	BEAM END EPOXY COATINGS	CATHODIC PROTECTION OF PILE CAP (MONITORING)	CATHODIC PROTECTION OF PILE CAP (NON-MONITORING)
	LS	CF	CF	LF	LF	LF	LF	EA	LF	CF	SF	SF	SF
SUPERSTRUCTURE			27.5	116.0	58.0				869.25	136.5	272.5		
SUBSTRUCTURE		15.0	30.0			40.50	67.25	8				888.0	4,179.0
TOTAL	LS	15.0	57.5	116.0	58.0	40.50	67.25	8	869.25	136.5	272.5	888.0	4,179.0

TOTAL BILL OF MATERIAL - CONT.							
	PRESTRESSED CONCRETE GIRDERS WITH THERMAL SPRAY ANODE (NON-MONITORING)	EPOXY OVERLAY SYSTEM I	EPOXY COATING	CLEANING AND PAINTING EXISTING BEARINGS WITH HIGH RATIO CALCIUM SULFONATE	PAINTING CONTAINMENT FOR BRIDGE NO. 640021	BRIDGE JACKING TYPE I FOR BRIDGE No. 640021	REMOVE AND RESET BEARINGS
	SF	SF	SF	EA	LS	EA	EA
SUPERSTRUCTURE	35,966.0	45.0		196		1	1
SUBSTRUCTURE			2,791.0				
TOTAL	35,966.0	45.0	2,791.0	196	LS	1	1

AT THE TIME OF PREPARATION OF THESE PLANS, IT WAS NOT ANTICIPATED THE FOLLOWING LISTED ITEMS THAT WOULD BE REQUIRED. HOWEVER, IT MAY BE DETERMINED IN THE FIELD THAT (SEE CHART BELOW), OR OTHER WORK WILL BE NECESSARY TO PROPERLY COMPLETE THE INTENDED BRIDGE PRESERVATION/ REHABILITATION WORK. THE CONTRACTOR SHALL BE PREPARED TO PERFORM SUCH WORK IN A TIMELY MANNER, AS DETERMINED IN THE FIELD. SUCH WORK SHALL BE CONSIDERED EXTRA WORK AND SHALL BE ADDRESSED AS PER ARTICLE 104-7 OF THE STANDARD SPECIFICATIONS. PROJECT SPECIAL PROVISIONS THAT OUTLINE REQUIREMENTS FOR THESE POTENTIAL ADDITIONAL WORK ITEMS HAVE BEEN PROVIDED IN PROJECT DOCUMENTS, BUT NO QUANTITIES HAVE BEEN LISTED. ACTUAL PAY ITEMS, QUANTITIES, AND COSTS WILL BE ESTABLISHED, AS REQUIRED, IF EXTRA WORK IS ENCOUNTERED.


PAY ITEM	
SPLICING OF PRESTRESSING STRANDS	EACH
EPOXY RESIN INJECTION	LINEAR FEET
CONCRETE DECK REPAIR FOR EPOXY OVERLAY	SQUARE FEET
TURBIDITY CURTAIN	SQUARE YARD

PROJECT NO. 15BPR.19
NEW HANOVER COUNTY
 BRIDGE NO. 640021

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

BILL OF MATERIAL

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			TOTAL SHEETS
2			4			58

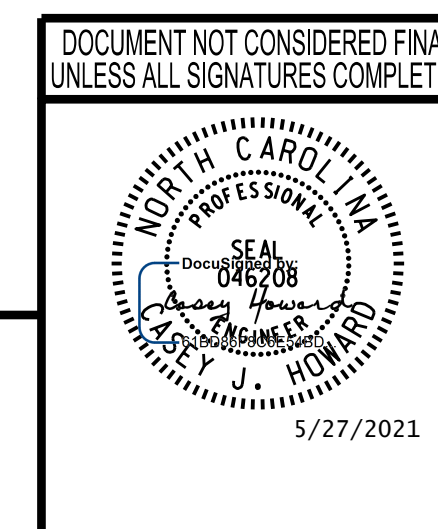

wsp

WSP USA Inc.
 434 FAYETTEVILLE STREET
 SUITE 1500
 RALEIGH, NC 27601
 TEL: 1.919.836.4040
 LICENSE NO. F-0165

5/26/2021 L:\Raleigh Office Projects\Structures\2018\188906-05 NCDOT - 640021 New Hanover Co\05 Plans\10_DGN\401_010_15BPR.19_SML.BM01_S-1.dgn

DRAWN BY: M.J. OSTRISHKO DATE: JULY 2018
 CHECKED BY: C.J. HOWARD DATE: JUL 2018