



5/14/99

GENERAL NOTES:


- PLACE CONTRACTION JOINTS AT 10' INTERVALS, EXCEPT THAT A 15' SPACING MAY BE USED WHEN A MACHINE IS USED OR WHEN SATISFACTORY SUPPORT FOR THE FACE FORM CAN BE OBTAINED WITHOUT THE USE OF TEMPLATES AT 10' INTERVALS.
- JOINT SPACING MAY BE ALTERED IF REQUIRED BY THE ENGINEER.
- CONTRACTION JOINTS MAY BE INSTALLED WITH THE USE OF TEMPLATES OR FORMED BY OTHER APPROVED METHODS.
- CONSTRUCT NON-TEMPLATE FORMED JOINTS A MIN. OF 1½" DEEP.
- FILL ALL CONSTRUCTION JOINTS WITH JOINT FILLER AND SEALER.
- SPACE EXPANSION JOINTS AT 90' INTERVALS AND ADJACENT TO ALL RIGID OBJECTS.

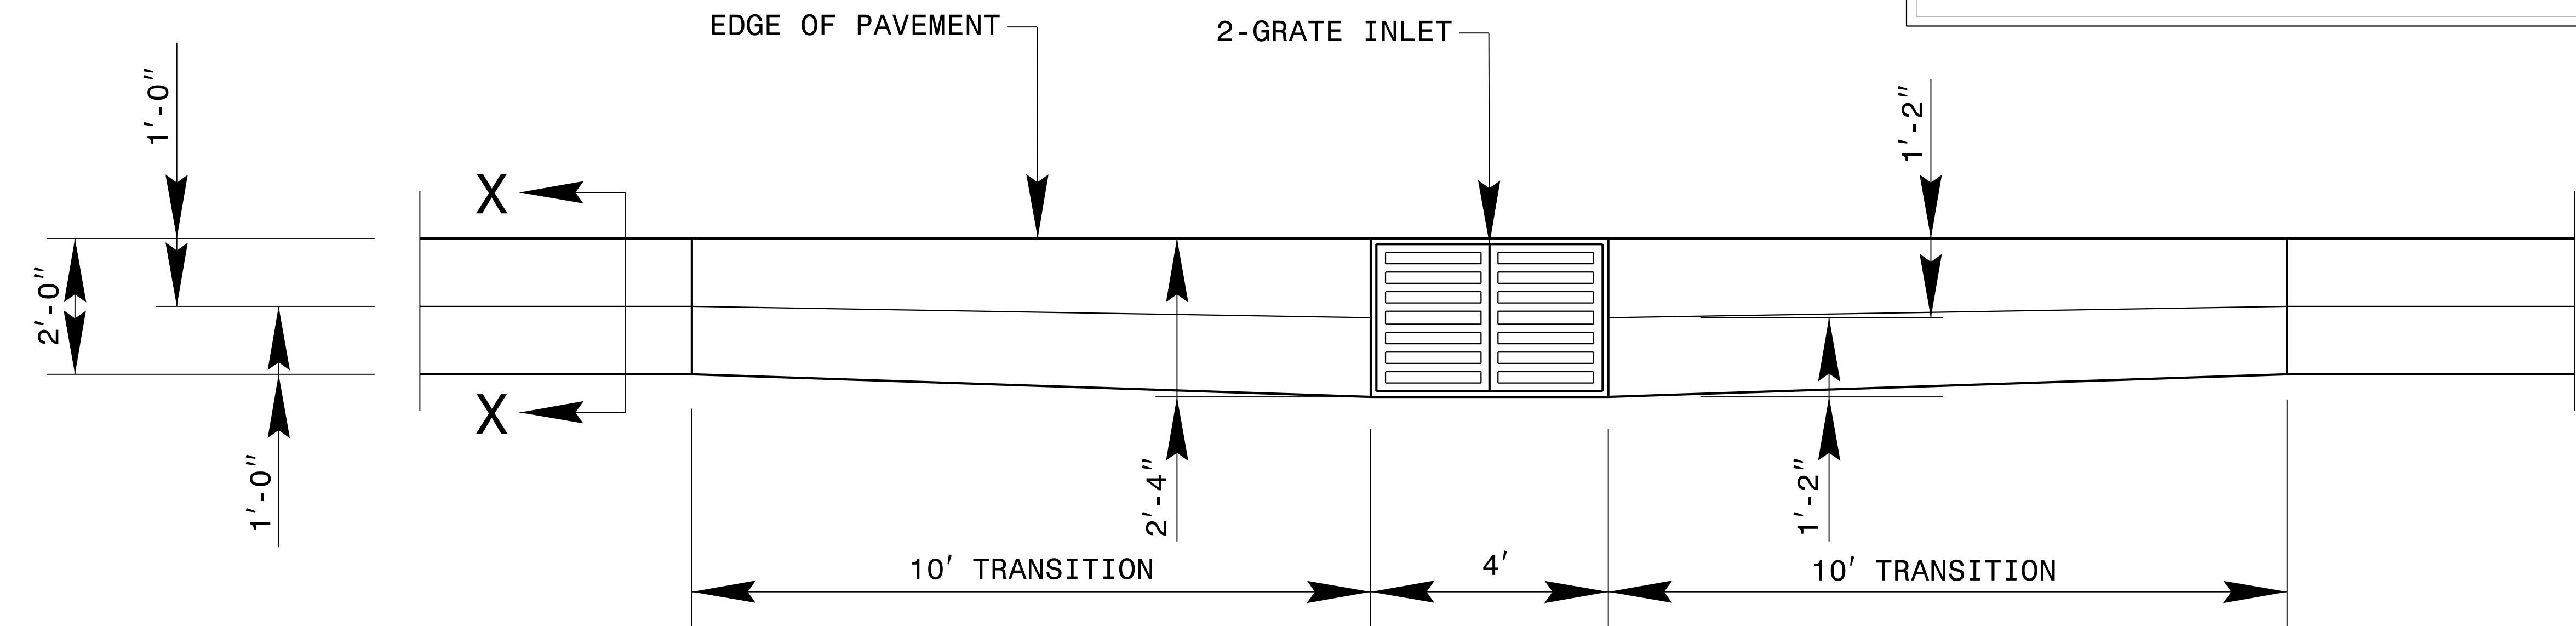

2-GI IN VALLELY GUTTER PLAN VIEW

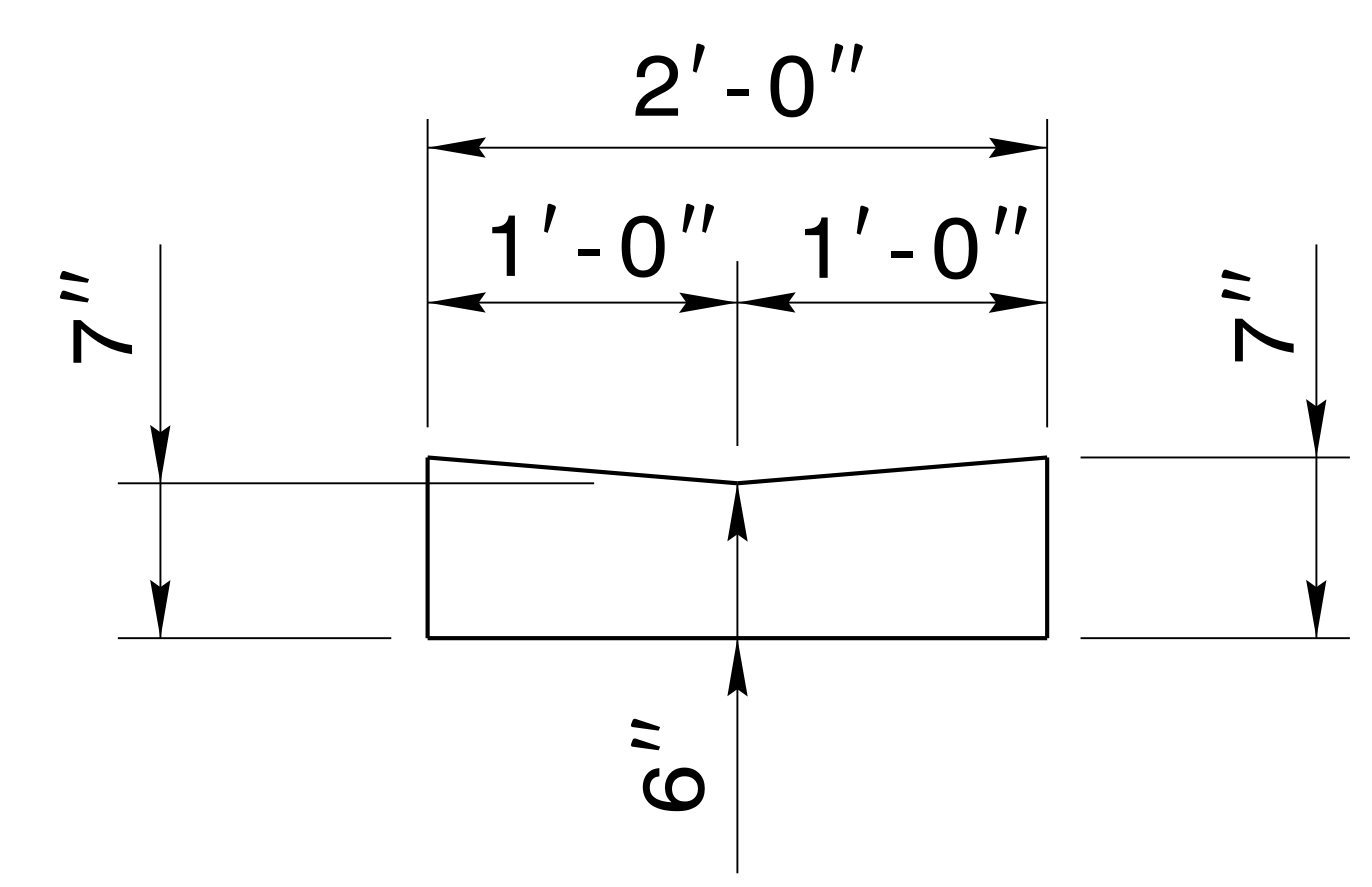

VALLEY GUTTER SECTION X-X

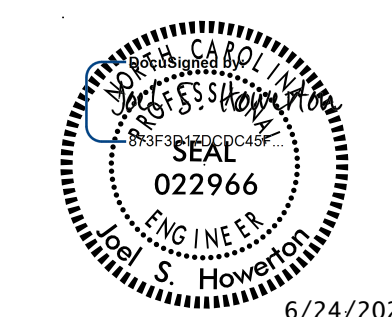

6/24/2020

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

CONTRACT STANDARDS & DEVELOPMENT UNIT
STANDARDS AND SPECIAL DESIGN
 Office 919-707-6950 FAX 919-250-4119

2-GI IN VALLEY GUTTER

ORIGINAL BY: _____ DATE: _____
 MODIFIED BY: rnbritt DATE: 02-20-12
 CHECKED BY: _____ DATE: _____
 FILE SPEC.: details/english/misc/2gi in valley gutter.dgn

I5-JAN-2020 07:51 S:\Contracts\Special Details\english\hydro\2gi in valley gutter.dgn .jhowerton AT USD-320965