

p:\gfn\pw.bentley.com\gfn\p-01\Documents\Projects\63639\Task 010 B-4626\Discipline\Struct\DN\Rowan 8\Rowan 8 TOTAL PRJ 9/2/2021 3:38:09 PM pdf_mono_gfclt_FS.plt Rowan.pen.tbl


NOTES:

REPAIR LOCATIONS AND ESTIMATED QUANTITIES ARE GIVEN WITH THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATION AND DESCRIPTION OF THE REPAIRS AND ADJUST THE ACTUAL QUANTITIES ENTERED INTO THE AS-BUILT REPAIR QUANTITY TABLE.

PAYMENT FOR CLASS II SURFACE PREPARATION IS BASED UPON SQUARE YARDS OF ADDITIONAL DEMOLITION REQUIRED FOLLOWING SCARIFICATION OF BRIDGE DECK. SEE "OVERLAY SURFACE PREPARATION" SPECIAL PROVISION.

SUMMARY OF QUANTITIES FOR SPAN "F"

	ESTIMATE	ACTUAL
SCARIFYING BRIDGE DECK	420.3 SY	
CLASS II SURFACE PREPARATION	- SY	
CONCRETE DECK REPAIR FOR PC OVERLAY	- SY	
SHOTBLASTING BRIDGE DECK	420.3 SY	
PC MATERIALS	14.6 CY	
PLACING AND FINISHING PC OVERLAY	420.3 SY	
GROOVING BRIDGE FLOORS	3422 SF	

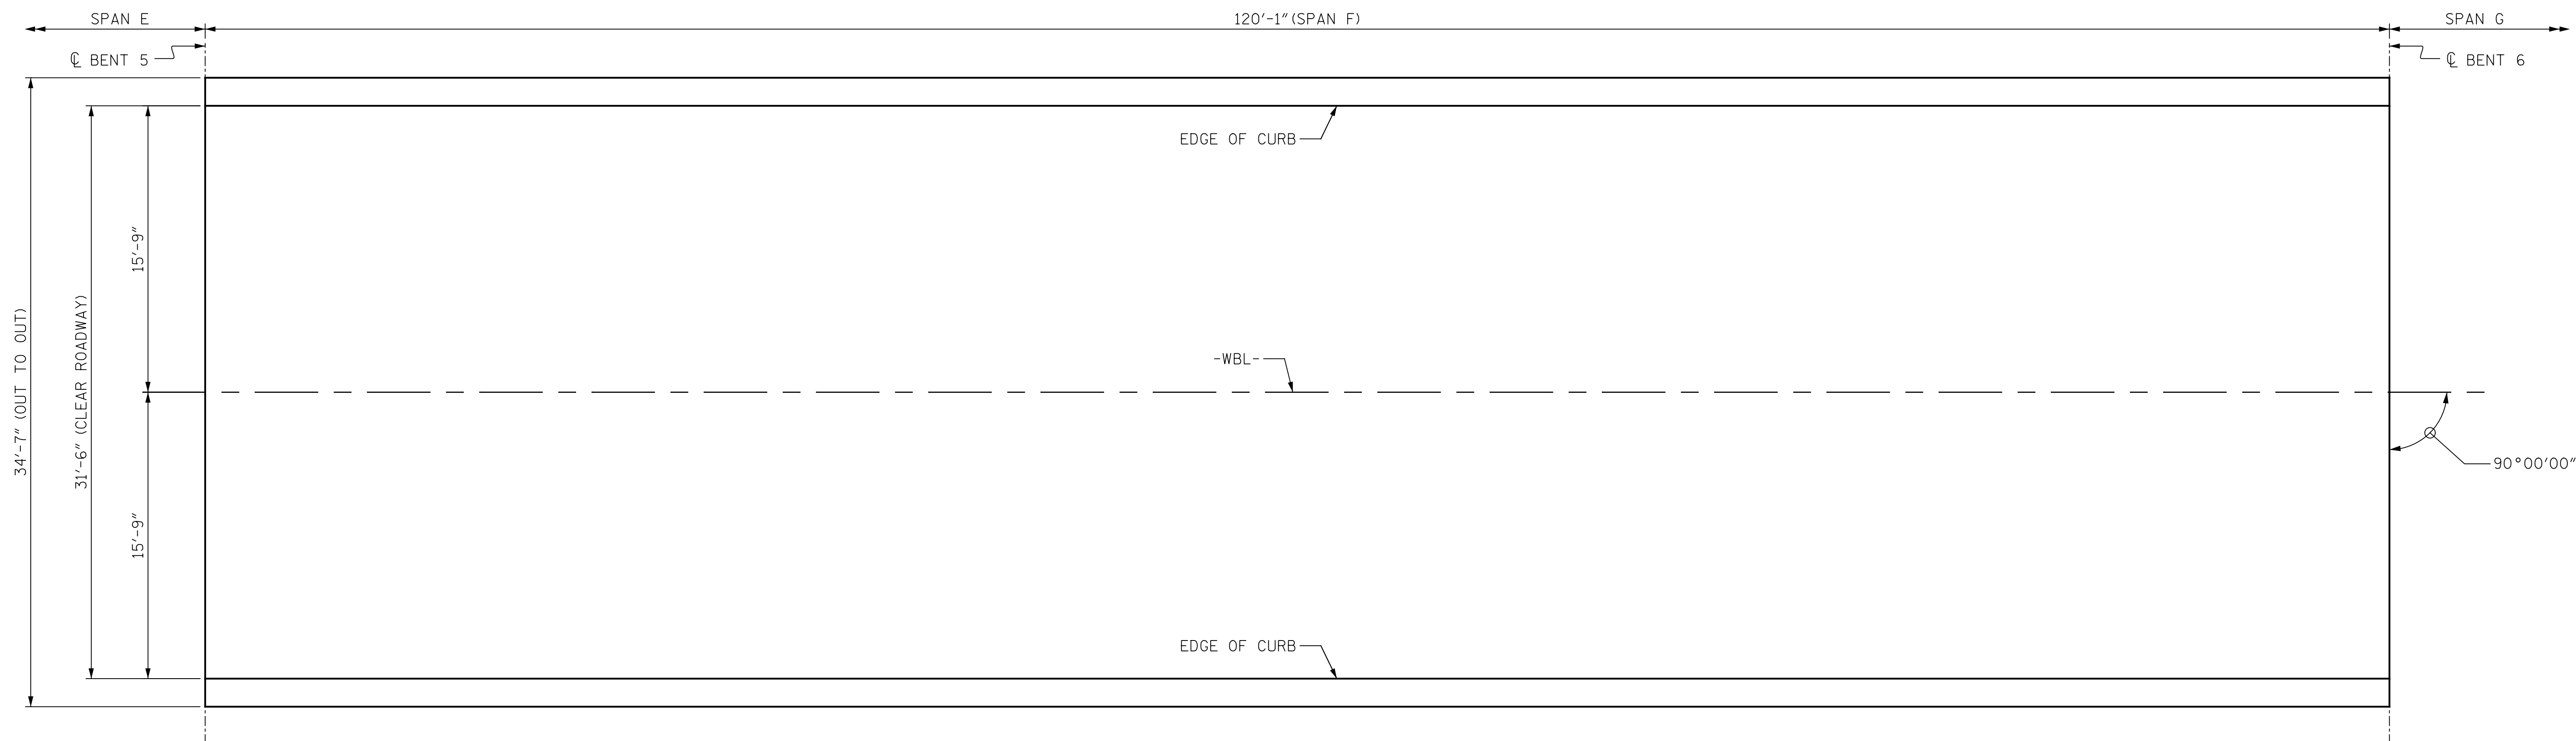

PLAN OF SPAN "F"

PROJECT NO. B-4626
STANLY, ROWAN
AND DAVIDSON COUNTY
 BRIDGE NO. 790008

- SCARIFYING OF BRIDGE DECK
- APPROX. AREA CLASS II SURFACE PREPARATION



DocuSign by: *Eric B. Nelson* 9/2/2021

PLANS PREPARED BY:
Gannett Fleming
 Excellence Delivered *As Promised*

One Glenwood Avenue
 Suite 900
 Raleigh, NC 27603
 (919) 420-7660
 NC Lic. No. F-0270

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

**SURFACE PREPARATION
SPAN "F"**

REVISIONS

NO.	BY:	DATE:	NO.	BY:	DATE:
1			3		
2			4		

SHEET NO.
 S2-10
 TOTAL SHEETS
 125

DRAWN BY : M. LEE DATE : 3/2021
 CHECKED BY : R. NELSON DATE : 4/2021