


p:\gfn\pw.bentley.com\gfn\pw-01\Documents\Projects\63639\Task 010 B-4626\Discipline\Struct\DN\Rowan 8\Rowan 8 TOTAL PRJ 9/2/2021 3:38:10 PM pdf\_mono\_gfclt\_FS.plt Rowan.pen.tbl

**NOTES:**

REPAIR LOCATIONS AND ESTIMATED QUANTITIES ARE GIVEN WITH THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATION AND DESCRIPTION OF THE REPAIRS AND ADJUST THE ACTUAL QUANTITIES ENTERED INTO THE AS-BUILT REPAIR QUANTITY TABLE.

PAYMENT FOR CLASS II SURFACE PREPARATION IS BASED UPON SQUARE YARDS OF ADDITIONAL DEMOLITION REQUIRED FOLLOWING SCARIFICATION OF BRIDGE DECK. SEE "OVERLAY SURFACE PREPARATION" SPECIAL PROVISION.

SUMMARY OF QUANTITIES FOR SPAN "J"		
	ESTIMATE	ACTUAL
SCARIFYING BRIDGE DECK	246.9 SY	
CLASS II SURFACE PREPARATION	- SY	
CONCRETE DECK REPAIR FOR PC OVERLAY	- SY	
SHOTBLASTING BRIDGE DECK	246.9 SY	
PC MATERIALS	7.7 CY	
PLACING AND FINISHING PC OVERLAY	246.9 SY	
GROOVING BRIDGE FLOORS	2011 SF	

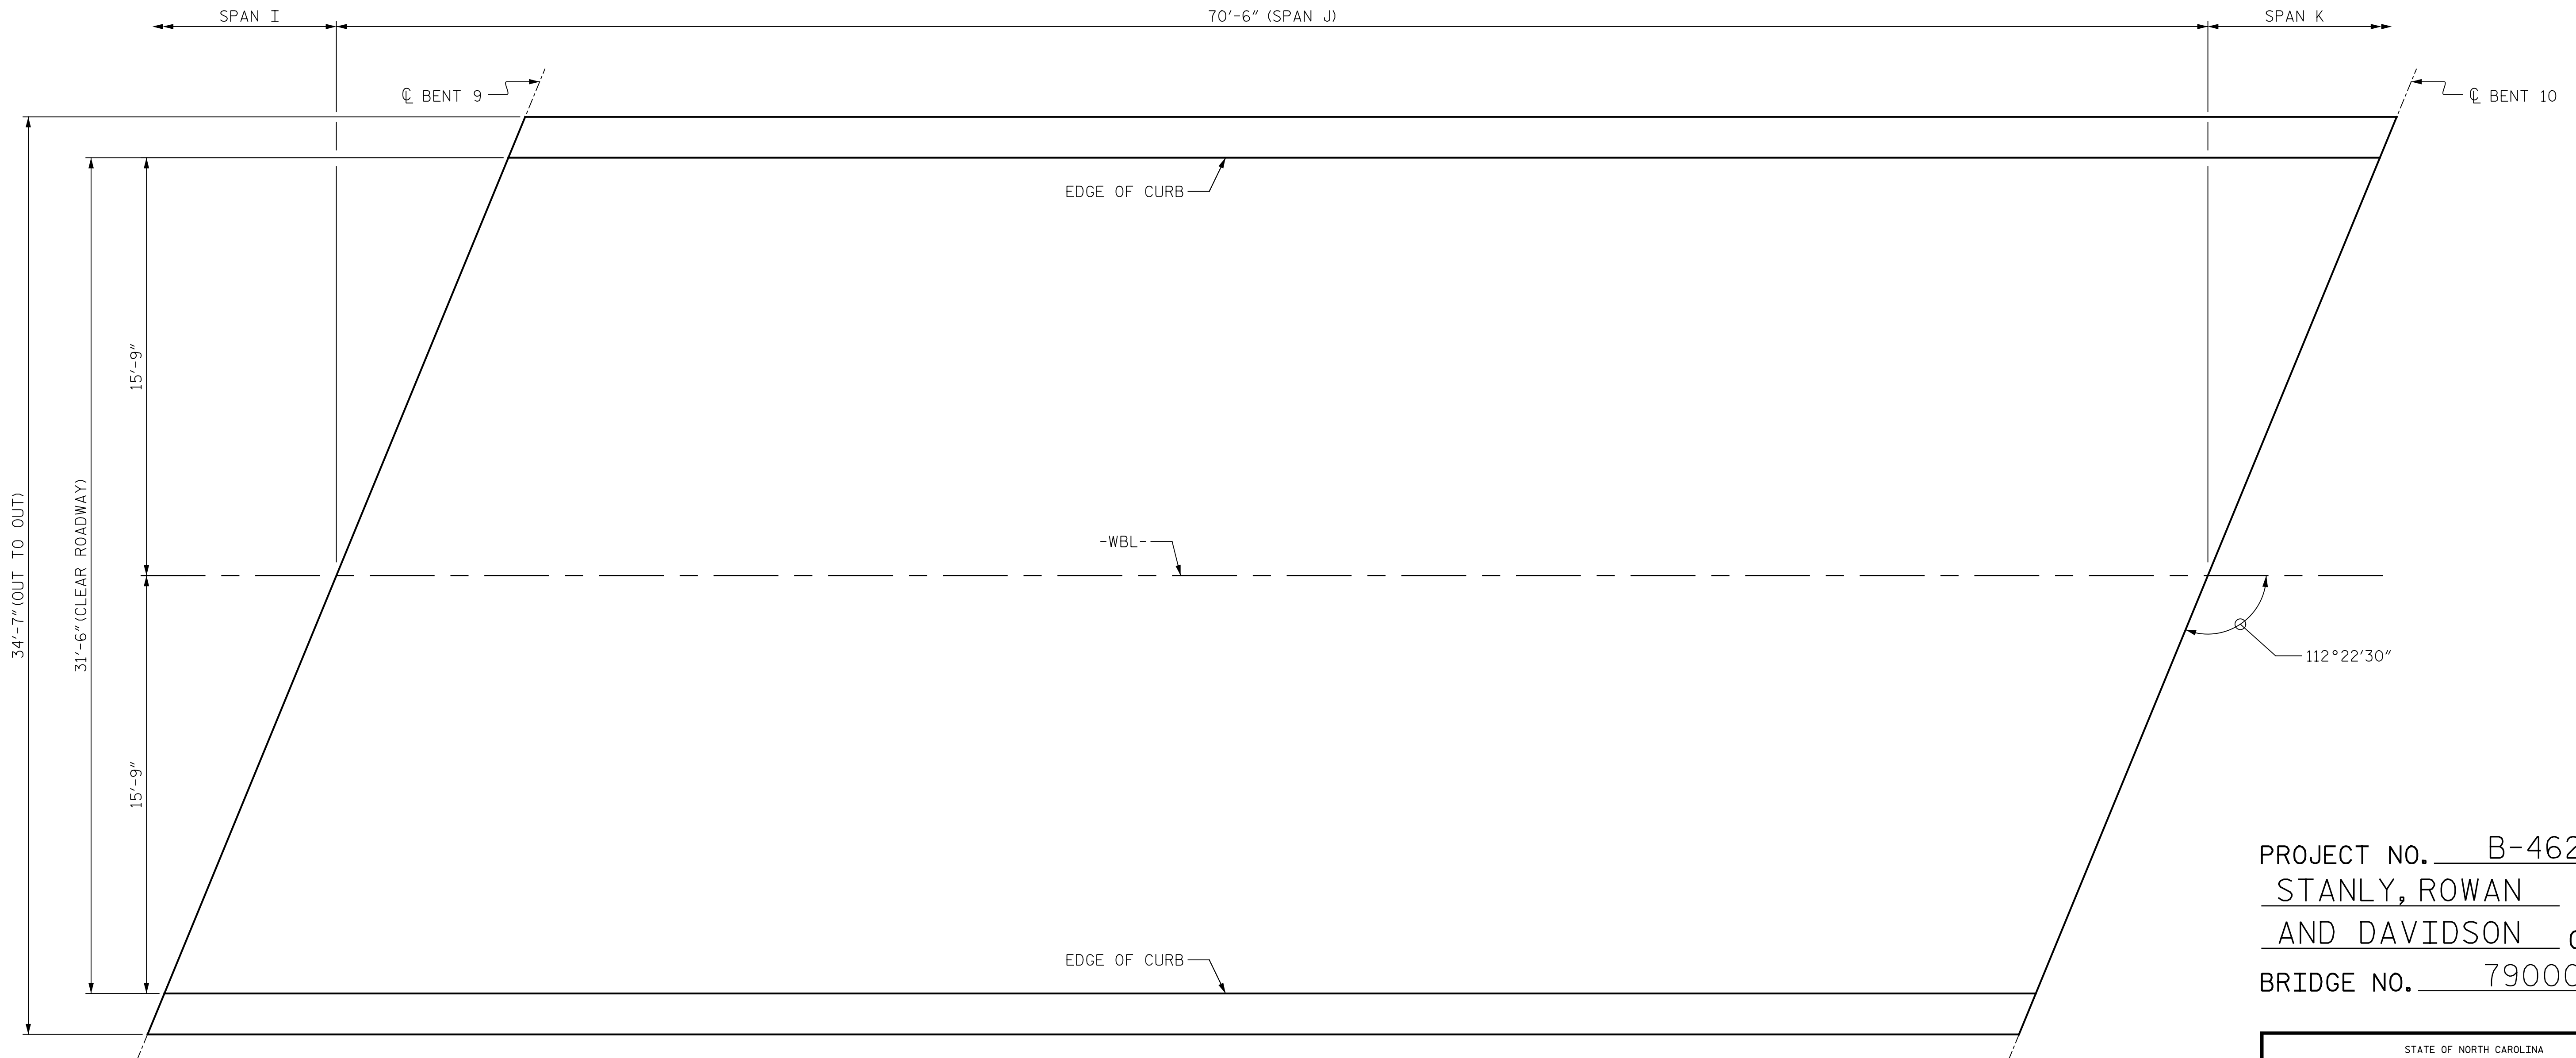

PLAN OF SPAN "J"

- SCARIFYING OF BRIDGE DECK
- APPROX. AREA CLASS II SURFACE PREPARATION

PROJECT NO. B-4626  
STANLY, ROWAN  
AND DAVIDSON COUNTY  
 BRIDGE NO. 790008



STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH

SURFACE PREPARATION  
 SPAN "J"

DRAWN BY : M. LEE DATE : 3/2021  
 CHECKED BY : R. NELSON DATE : 4/2021

PLANS PREPARED BY:  
**Gannett Fleming**  
 Excellence Delivered As Promised

One Glenwood Avenue  
 Suite 900  
 Raleigh, NC 27603  
 (919) 420-7660  
 NC Lic. No. F-0270

DOCUMENT NOT CONSIDERED  
 FINAL UNLESS ALL  
 SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S2-14
1			3			TOTAL SHEETS
2			4			125