

p:\gfn\p-w.bentley.com\mgfnet-pw-01\Documents\Projects\63639\Task 010 B-4626\Discipline\Struct\DN\Rowan 8\Rowan 8 TOTAL PRJ 9/2/2021 3:38:11 PM pdf_mono_gfclt_FS.plt Rowan.pen.tbl


NOTES:

REPAIR LOCATIONS AND ESTIMATED QUANTITIES ARE GIVEN WITH THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATION AND DESCRIPTION OF THE REPAIRS AND ADJUST THE ACTUAL QUANTITIES ENTERED INTO THE AS-BUILT REPAIR QUANTITY TABLE.

PAYMENT FOR CLASS II SURFACE PREPARATION IS BASED UPON SQUARE YARDS OF ADDITIONAL DEMOLITION REQUIRED FOLLOWING SCARIFICATION OF BRIDGE DECK. SEE "OVERLAY SURFACE PREPARATION" SPECIAL PROVISION.

FOR EPOXY PROTECTIVE COATING, SEE SPECIAL PROVISIONS.


SUMMARY OF QUANTITIES FOR SPAN "L"		
	ESTIMATE	ACTUAL
SCARIFYING BRIDGE DECK	155.0 SY	
CLASS II SURFACE PREPARATION	1.9 SY	
CONCRETE DECK REPAIR FOR PC OVERLAY	1.9 SY	
SHOTBLASTING BRIDGE DECK	155.0 SY	
PC MATERIALS	4.8 CY	
PLACING AND FINISHING PC OVERLAY	155.0 SY	
GROOVING BRIDGE FLOORS	1261 SF	
TOP OF CAP EPOXY COATINGS		
END BENT 2	93 SF	

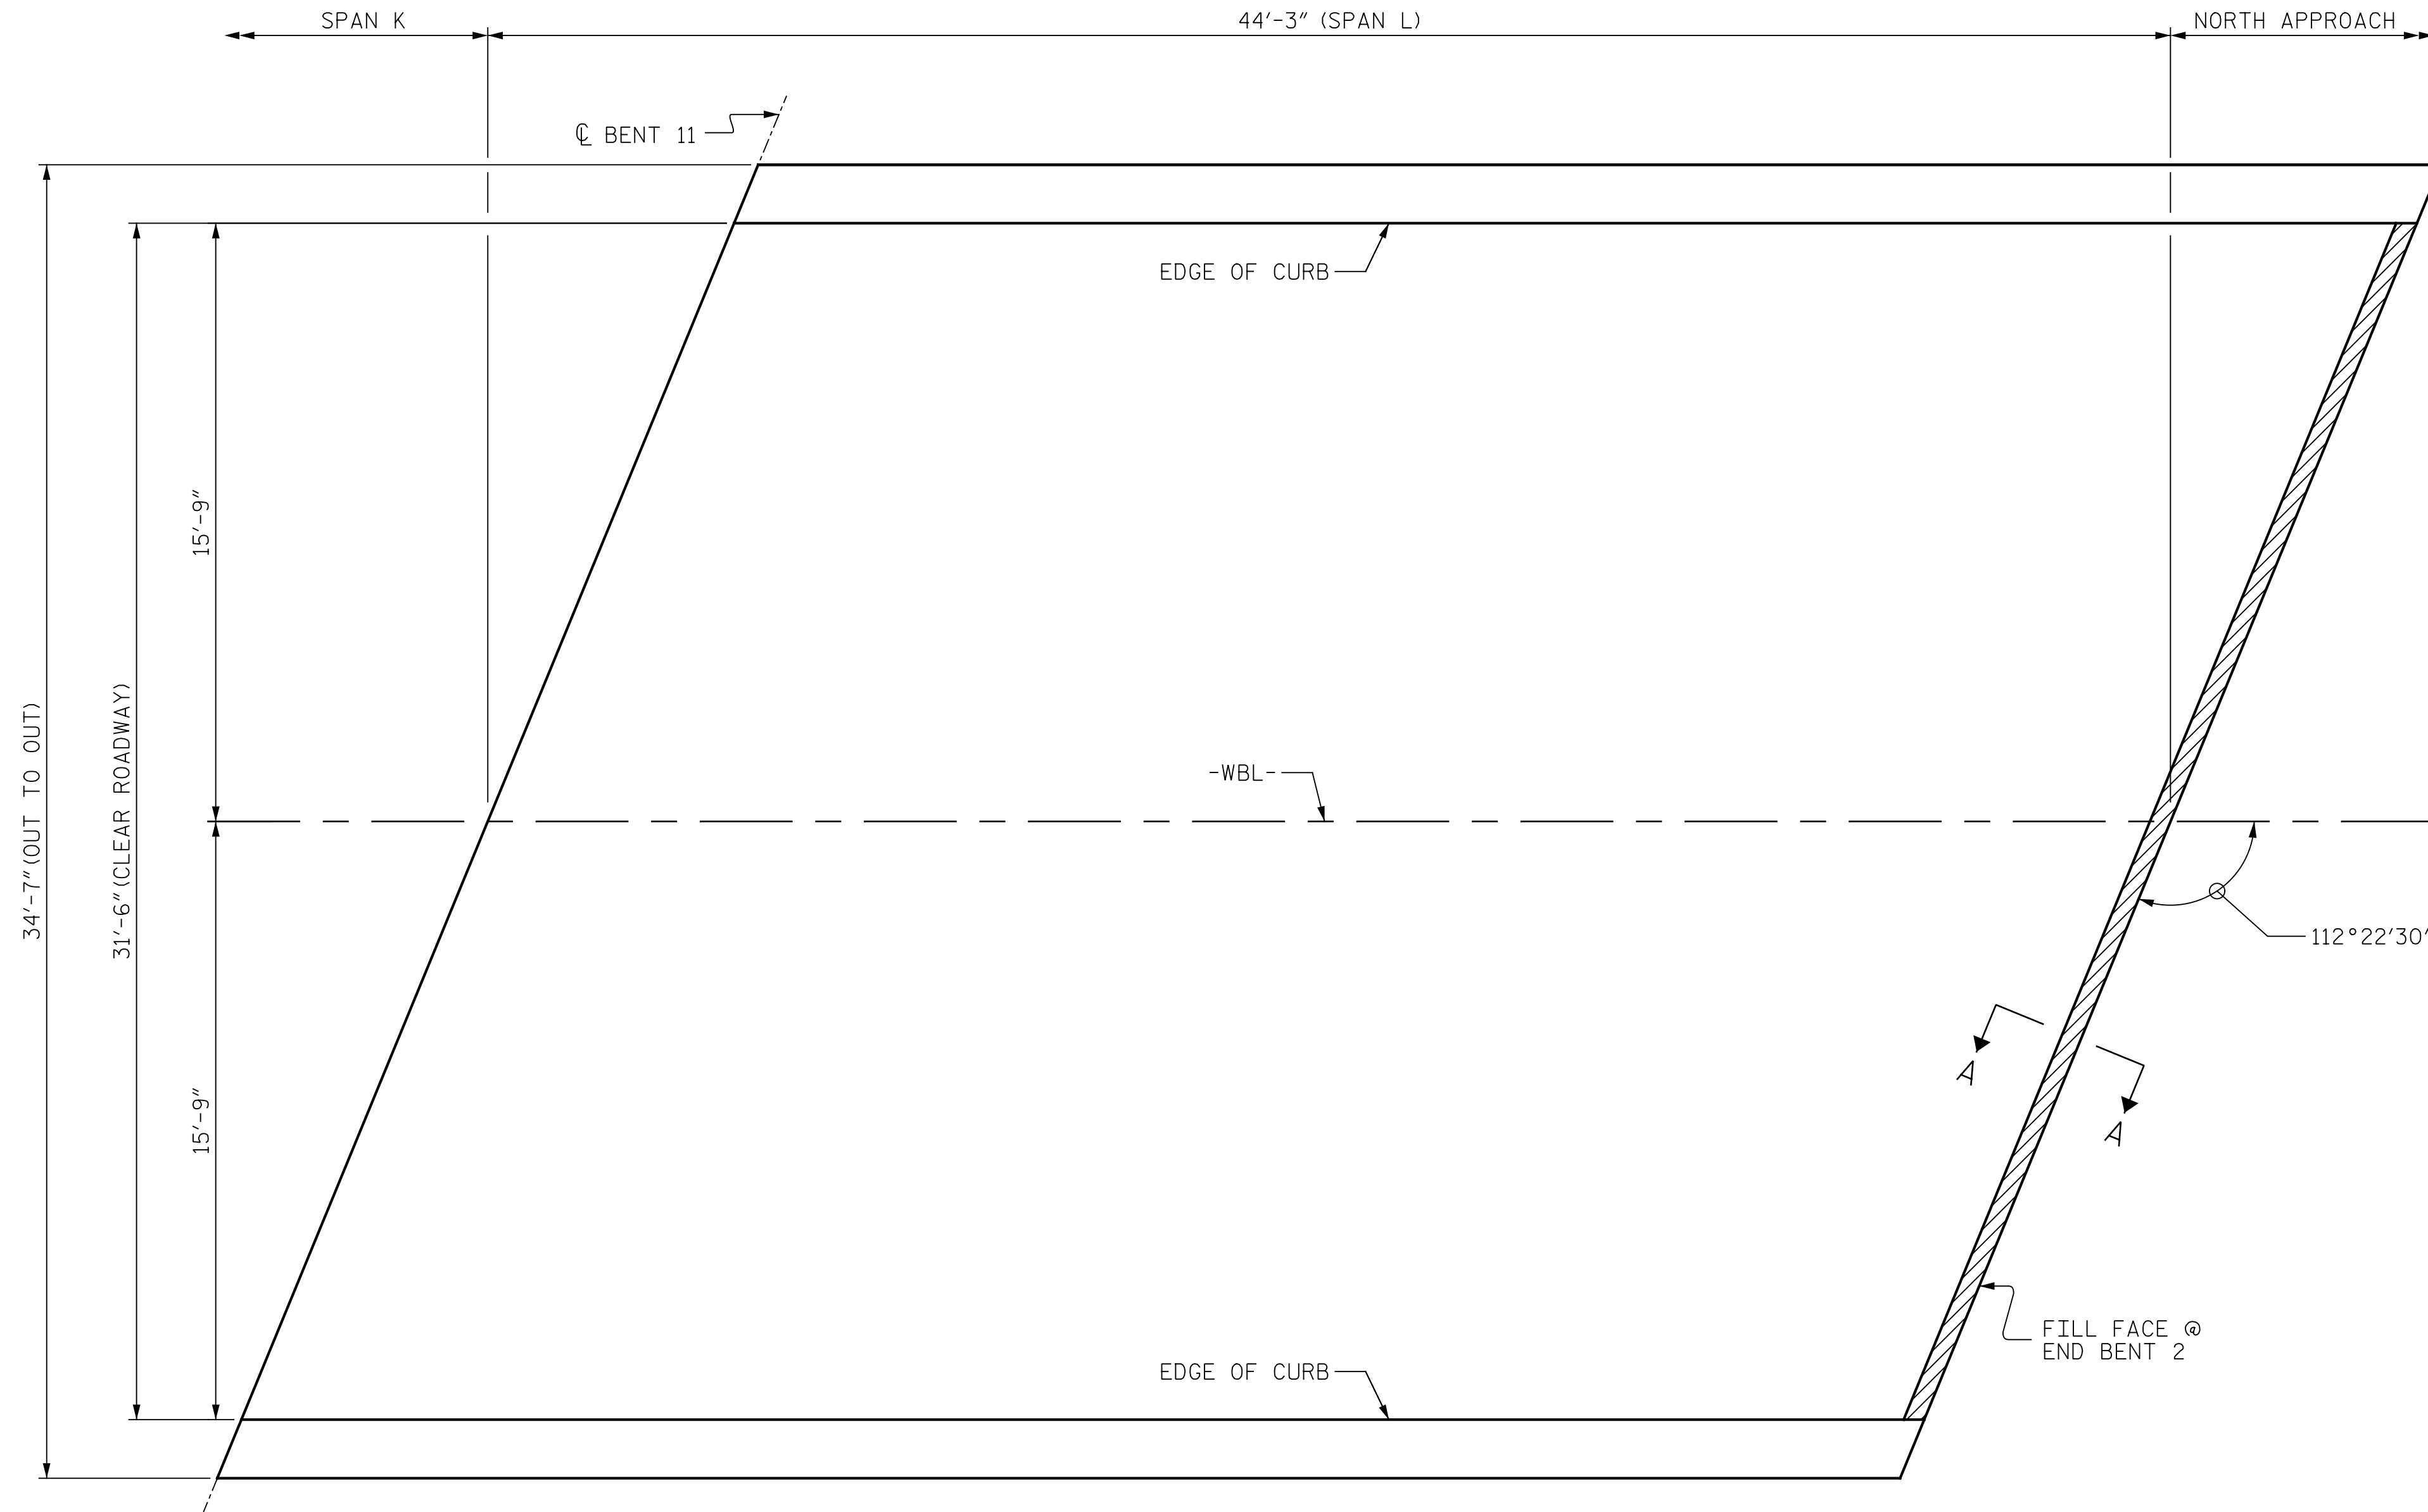

PLAN OF SPAN "L"
 (SEE SHEET NO. S2-18 FOR SECTION A-A)

- SCARIFYING OF BRIDGE DECK
- APPROX. AREA CLASS II SURFACE PREPARATION

PROJECT NO. B-4626
STANLY, ROWAN
AND DAVIDSON COUNTY
 BRIDGE NO. 790008

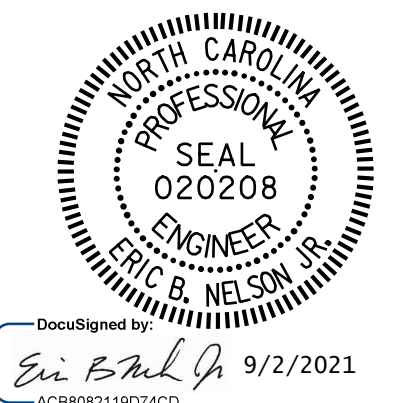

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

SURFACE PREPARATION
 SPAN "L"

DRAWN BY : M. LEE DATE : 3/2021
 CHECKED BY : R. NELSON DATE : 4/2021

PLANS PREPARED BY:
Gannett Fleming
 Excellence Delivered As Promised
 One Glenwood Avenue
 Suite 900
 Raleigh, NC 27603
 (919) 420-7660
 NC Lic. No. F-0270

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			TOTAL SHEETS
2			4			125