

PLAN

AS-BUILT REPAIR QUANTITY TABLE		
TOP OF DECK REPAIRS		
	ESTIMATE	ACTUAL
SCARIFYING BRIDGE DECK	340 SQ. YDS.	
CLASS II SURFACE PREPARATION	0.0 SQ. YDS.	
CONCRETE DECK REPAIR FOR PC OVERLAY	0.0 SQ. YDS.	
SHOTBLASTING BRIDGE DECK	340 SQ. YDS.	
PC MATERIALS	16.5 CU YDS.	
PLACING AND FINISHING PC OVERLAY	340 SQ. YDS.	
GROOVING BRIDGE FLOORS	2868 SQ. FT.	

TOP OF DECK REPAIR QUANTITIES REPRESENT ESTIMATED VALUES OF CLASS II SURFACE PREPARATION AND CONCRETE DECK REPAIR FOR PC OVERLAY AFTER REMOVAL OF UNSOUND CONCRETE. (MIN. 2" CLEAR TO SAWCUT). SEE OVERLAY SURFACE PREPARATION FOR POLYMER CONCRETE SPECIAL PROVISION.

NOTES:


REPAIR LOCATIONS AND ESTIMATE OF QUANTITIES ARE BASED ON THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE AS-BUILT REPAIR QUANTITY TABLE.

FOR SECTION B-B, SEE "JOINT DETAILS" SHEET.
 FOR CONCRETE DECK REPAIR FOR PC OVERLAY, SEE SPECIAL PROVISION.
 FOR PC MATERIALS, SEE SPECIAL PROVISION.

- APPROX. CLASS II SURFACE PREPARATION
- EPOXY RESIN INJECTION (ERI)

PROJECT NO. I-5746C
MEKLENBURG COUNTY
 BRIDGE NO. 590320

SHEET 3 OF 3

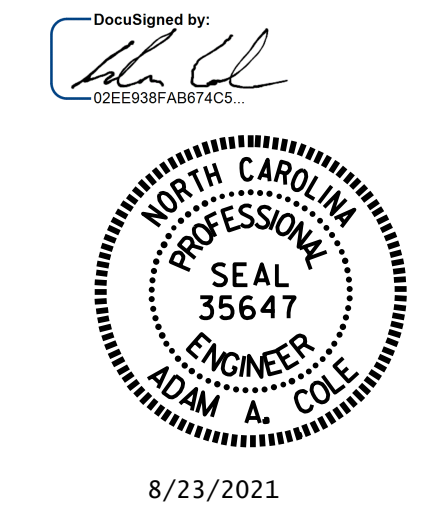

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

DECK SURFACE REPAIR
 SPAN C

DRAWN BY : R.L. PUTEK/E. BAYISSA DATE : .07/2021
 CHECKED BY : H.A. LOCKLEAR DATE : .07/2021

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	TOTAL SHEETS
1			3			274
2			4			274