

AS-BUILT REPAIR QUANTITY TABLE

BENT 2 NORTHBOUND	QUANTITIES			
	ESTIMATE		ACTUAL	
SHOTCRETE REPAIRS	AREA SQ. FT.	VOLUME CU. FT.	AREA SQ. FT.	VOLUME CU. FT.
CAP	48.5	24.3		
COLUMN & STRUTS	60.6	30.3		
CONCRETE REPAIRS	AREA SQ. FT.	VOLUME CU. FT.	AREA SQ. FT.	VOLUME CU. FT.
CAP	7.2	3.6		
COLUMN & STRUTS	0.0	0.0		
EPOXY RESIN INJECTION		LIN. FT.		LIN. FT.
CAP		0.0		
COLUMN & STRUTS		1.0		
EPOXY COATING		SQ. FT.		SQ. FT.
TOP OF BENT CAP & STRUTS		0.0		

VALUES IN CHART REPRESENT ESTIMATED REPAIR TOTALS AFTER REMOVAL OF UNSOUND CONCRETE, MINIMUM OF 1" BEHIND REBAR AND MINIMUM 2" CLEARANCE TO SAWCUT. SEE "TYPICAL CAP AND COLUMN REPAIR DETAILS" SHEET.

NOTES

REPAIR LOCATIONS AND ESTIMATE OF QUANTITIES ARE GIVEN BASED ON THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATION AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE AS-BUILT REPAIR QUANTITY TABLE.

CONCRETE REPAIRS MAY BE SUBSTITUTED IN LIEU OF SHOTCRETE REPAIRS WITH THE APPROVAL OF THE ENGINEER.




FOR SHOTCRET REPAIRS, SEE SPECIAL PROVISION.

FOR CONCRETE REPAIRS, SEE SPECIAL PROVISION.

FOR EPOXY RESIN INJECTION, SEE SPECIAL PROVISION.

CLEAN AND REMOVE DEBRIS FROM THE TOP OF THE CAP AND STRUTS. EPOXY COATING SHALL BE APPLIED TO THE TOP SURFACE OF THE CAP AND STRUTS. THE CONTRACTOR SHALL NOT COAT THE AREA OF THE CAP BENEATH THE MASONRY PLATES. FOR EPOXY COATING, SEE SPECIAL PROVISIONS.

AFTER SATISFACTORY COMPLETION OF SHOTCRETE, CONCRETE AND ERI REPAIRS, REPAIR EXISTING MURAL PAINT ON BENTS AND GIRDERS, AS APPROPRIATE.


-  CONCRETE REPAIR AREA
-  SHOTCRETE REPAIR AREA
-  EPOXY RESIN INJECTION (ERI)

PROJ. NO. I-5746C
MECKLENBURG COUNTY
 BRIDGE NO. 590322

SHEET 2 OF 2

DocuSigned by:

 02E399AB014C5...

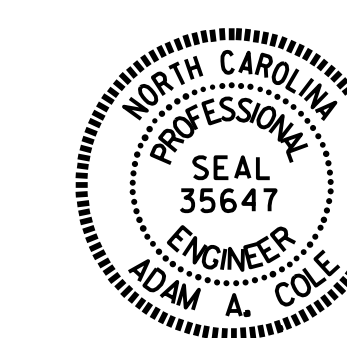

8/23/2021


STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

BENT 2
 NORTHBOUND
 SPAN C FACE

REVISIONS

NO.	BY:	DATE:	NO.	BY:	DATE:	SHEET NO.
1			3			S5-15
2			4			TOTAL SHEETS 274

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

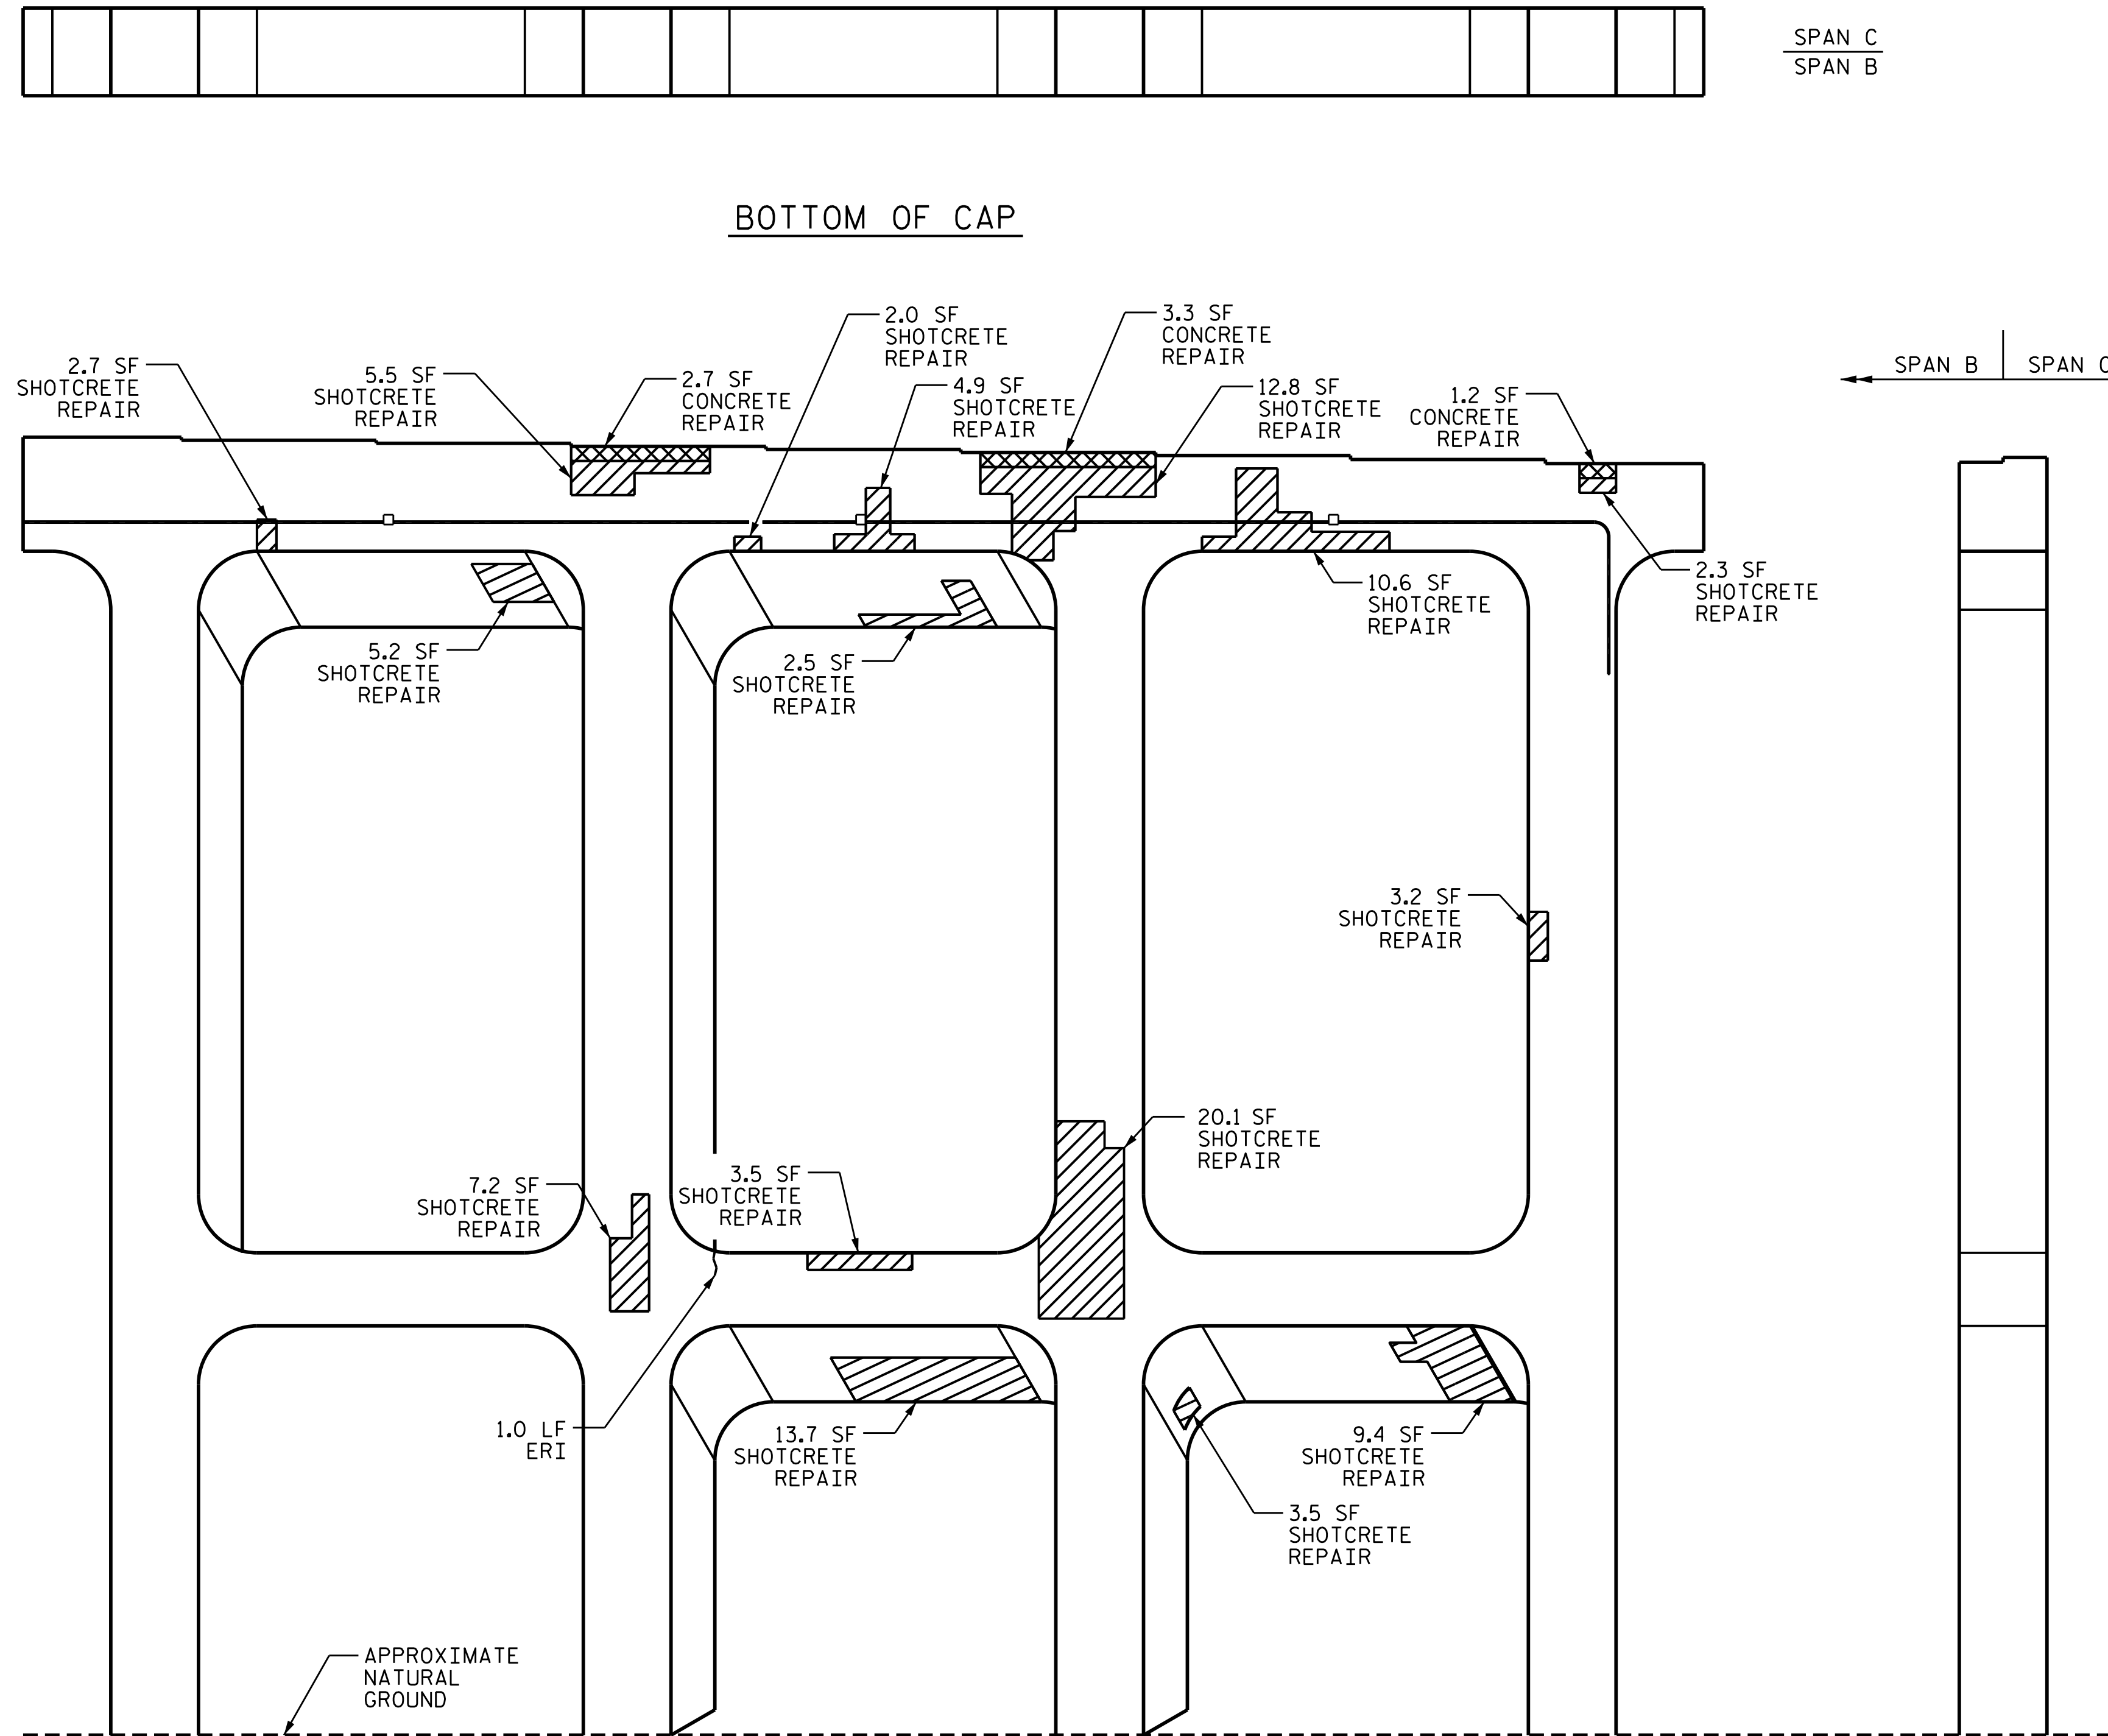

BENT 2 NORTHBOUND

DRAWN BY : R.L. PUTEK DATE : 05/2021
 CHECKED BY : H.A. LOCKLEAR DATE : 05/2021