
PLANTING DETAILS


SEEDLING / LINER JAREROOT PLANTING DETAIL

HEALING IN


1. Locate a healing-in site in a shady, well protected area.

2. Excavate a flat bottom trench 12 inches deep and provide drainage.




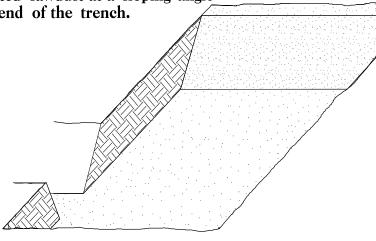

4. Place a single layer of plants against the sloping end so that the root collar is at ground level.

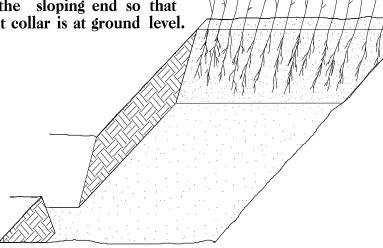


5. Place a 2 inch layer of well rottedy sawdust over the roots maintaining a sloping angle.

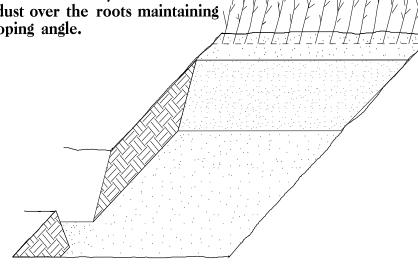


6. Repeat layers of plants and sawdust as necessary and water thoroughly.


DI33LE PLANTING METHOD USING THE K3C PLANTING 3AR

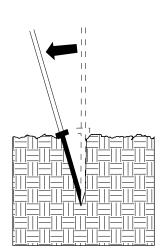


1. Insert planting bar as shown and pull handle

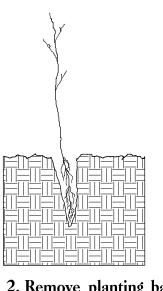


2. Remove planting bar and place seedling at correct depth.

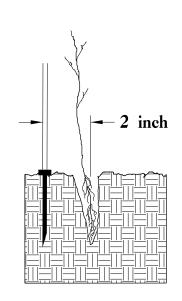


3. Insert planting bar 2 inches toward planter

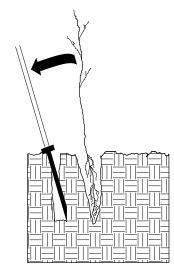

4. Pull handle of bar toward planter, firming soil at bottom.



5. Push handle forward firming soil at top.

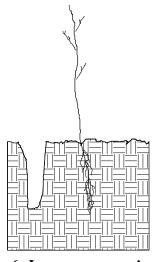

6. Leave compaction hole open. Water thoroughly.


PLANTING NOTES:

PLANTING 3AG
During planting, seedlings shall be kept in a moist canvas bag or similar container to prevent the root systems from drying.



K3C PLANTING 3AR
Planting bar shall have a
blade with a triangular
cross section, and shall
be 12 inches long,
4 inches wide and
1 inch thick at center.

ROOT PRUNING
All seedlings shall be root
pruned, if necessary, so that
no roots extend more than
10 inches below the root collar.



ROADWAY DESIGN **HYDRAULICS** ENGINEER ENGINEER

REFORESTATION

☐ TREE REFORESTATION SHALL 3E PLANTED 6 FT. TO 10 FT. ON CENTER, RANDOM SPACING, AVERAGING 8 FT. ON CENTER, APPROXIMATELY 680 PLANTS PER ACRE.

REFORESTATION

MIXTURE, TYPE, SIZE, AND FURNISH SHALL CONFORM TO THE FOLLOWING:

34% PLATANUS OCCIDENTALIS AMERICAN SYCAMORE 12 in - 18 in 3R

12 in - 18 in 3R 33% LIRIODENDRON TULIPIFERA TULIP POPLAR

12 in - 18 in 3R 33% **BETULA NIGRA** RIVER 3IRCH

REFORESTATION DETAIL SHEET

N.C.D.O.T. - ROADSIDE ENVIRONMENTAL UNIT