

PLAN - SPANS A, B, & C

AS-BUILT REPAIR QUANTITY TABLE

	APPROACH SLAB 1		SPAN A		SPAN B		SPAN C		APPROACH SLAB 2	
	ESTIMATE	ACTUAL	ESTIMATE	ACTUAL	ESTIMATE	ACTUAL	ESTIMATE	ACTUAL	ESTIMATE	ACTUAL
SILANE DECK TREATMENT	72.0 SQ. YDS.		151.7 SQ. YDS.		200.9 SQ. YDS.		164.4 SQ. YDS.		72.0 SQ. YDS.	
SHOTBLASTING BRIDGE DECK	72.0 SQ. YDS.		151.7 SQ. YDS.		200.9 SQ. YDS.		164.4 SQ. YDS.		72.0 SQ. YDS.	
BRIDGE JOINT DEMOLITION			47.0 SQ. FT.				47.0 SQ. FT.			

NOTES:

REPAIR LOCATIONS AND ESTIMATE OF QUANTITIES ARE BASED ON THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE AS-BUILT REPAIR QUANTITY TABLE.


FOR SILANE DECK TREATMENT, SEE SPECIAL PROVISIONS.

FOR CONCRETE DECK REPAIR FOR SILANE DECK TREATMENT, SEE SPECIAL PROVISIONS.

FOR SECTION A-A, SEE JOINT DETAILS SHEET.

FOR BRIDGE JOINT DEMOLITION, SEE SPECIAL PROVISIONS.

PROJECT NO. I-5946B
RICHMOND COUNTY
 BRIDGE NO. 760183

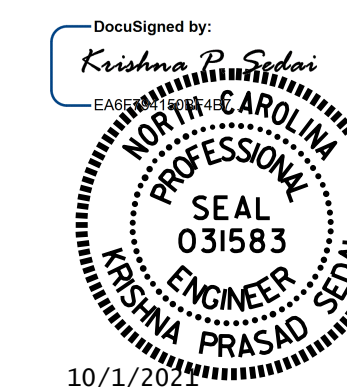

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH
 DECK SURFACE REPAIR
 SPANS A, B & C
 WITH
 APPROACH SLABS

DRAWN BY : C. RUIZ DATE : 01/2020
 CHECKED BY : A. SORSENGINH DATE : 06/2021

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			S1-03
2			4			TOTAL SHEETS 6