
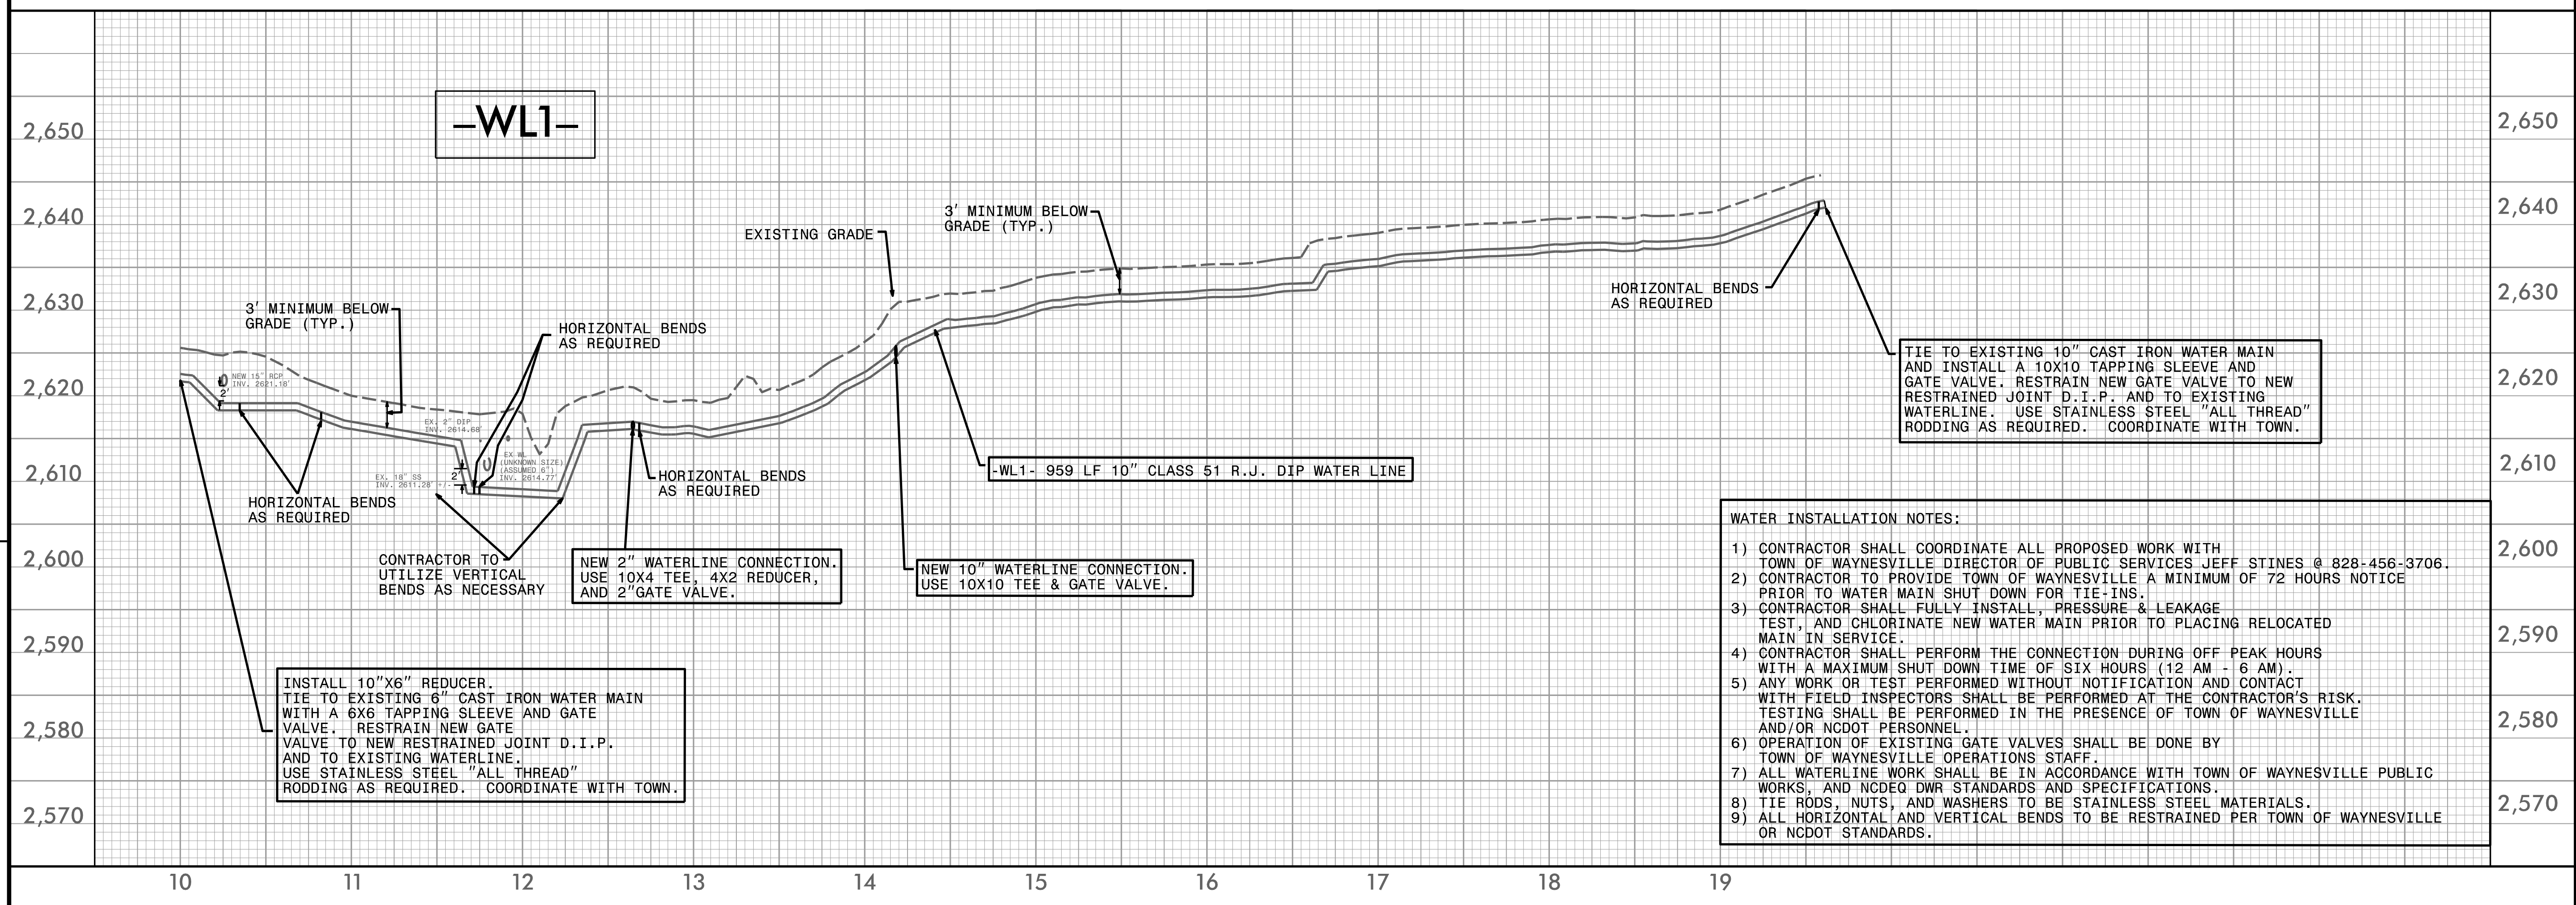


8.17/99

PROJECT REFERENCE NO. U-5888	SHEET NO. UC-9
DESIGNED BY: SS	
DRAWN BY: SS	
CHECKED BY: MVZ	
APPROVED BY: MVZ	
REVISED:	NORTH CAROLINA DEPARTMENT OF TRANSPORTATION UTILITIES ENGINEERING SEC. PHONE: (919) 707-6690 FAX: (919) 250-4151
UTILITY CONSTRUCTION	

FINAL DESIGN
RELEASE
FOR CONSTRUCTION

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

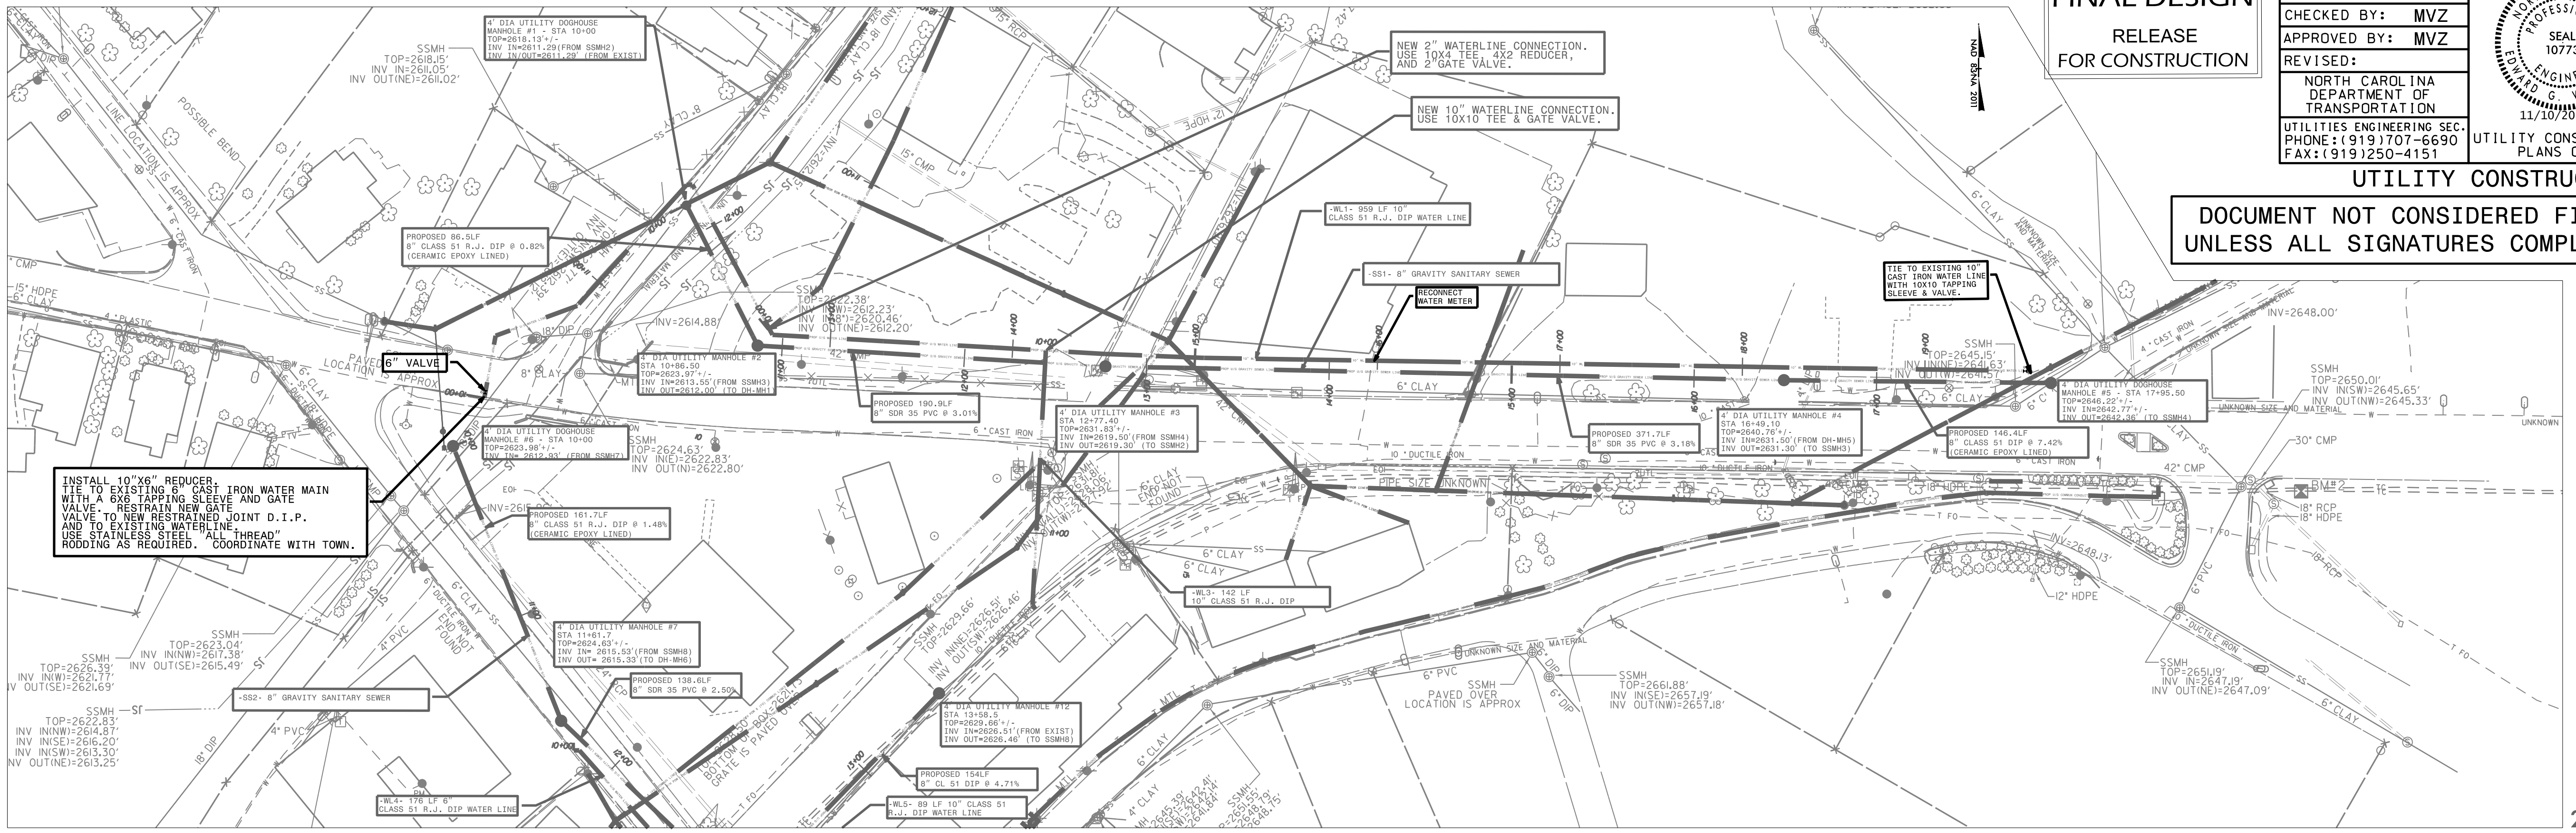

- WATER INSTALLATION NOTES:**
- 1) CONTRACTOR SHALL COORDINATE ALL PROPOSED WORK WITH TOWN OF WAYNESVILLE DIRECTOR OF PUBLIC SERVICES JEFF STINES @ 828-456-3706.
 - 2) CONTRACTOR TO PROVIDE TOWN OF WAYNESVILLE A MINIMUM OF 72 HOURS NOTICE PRIOR TO WATER MAIN SHUT DOWN FOR TIE-INS.
 - 3) CONTRACTOR SHALL FULLY INSTALL, PRESSURE & LEAKAGE TEST, AND CHLORINATE NEW WATER MAIN PRIOR TO PLACING RELOCATED MAIN IN SERVICE.
 - 4) CONTRACTOR SHALL PERFORM THE CONNECTION DURING OFF PEAK HOURS WITH A MAXIMUM SHUT DOWN TIME OF SIX HOURS (12 AM - 6 AM).
 - 5) ANY WORK OR TEST PERFORMED WITHOUT NOTIFICATION AND CONTACT WITH FIELD INSPECTORS SHALL BE PERFORMED AT THE CONTRACTOR'S RISK. TESTING SHALL BE PERFORMED IN THE PRESENCE OF TOWN OF WAYNESVILLE AND/OR NCDOT PERSONNEL.
 - 6) OPERATION OF EXISTING GATE VALVES SHALL BE DONE BY TOWN OF WAYNESVILLE OPERATIONS STAFF.
 - 7) ALL WATERLINE WORK SHALL BE IN ACCORDANCE WITH TOWN OF WAYNESVILLE PUBLIC WORKS, AND NCDOT DWR STANDARDS AND SPECIFICATIONS.
 - 8) TIE RODS, NUTS, AND WASHERS TO BE STAINLESS STEEL MATERIALS.
 - 9) ALL HORIZONTAL AND VERTICAL BENDS TO BE RESTRAINED PER TOWN OF WAYNESVILLE OR NCDOT STANDARDS.

REVISIONS