


### NOTES

1. CONTRACTOR TO RECORD EXISTING SPLICE ARRANGEMENT FOR COMPARISON TO THE SUPPLIED SPLICE DETAILS. IF DISCREPANCIES EXIST, CONTACT THE ENGINEER TO DETERMINE HOW TO PROCEED WITH RESPLICING. PROVIDE AS-BUILT PLANS TO THE ENGINEER IF FINAL SPLICE ARRANGEMENT DIFFERS FROM THE SUPPLIED SPLICE DETAILS.
2. REMOVE EXISTING FIBER 3 FROM THE EXISTING SPLICE ENCLOSURE.
3. CAP EXISTING FIBER 3 AND BACKPULL TO, AND STORE ON, NEW FIBER STORAGE RACKS.
4. AFTER REMOVAL OF JUNCTION BOXES, BACKFILL WITH AN APPROVED MATERIAL. ABANDON EXISTING CONDUIT.



D:\100\Design\1an\_Sheets\Final\_Submittal\U-5798A\scp04.dgn 1/22/2022 12:29:09

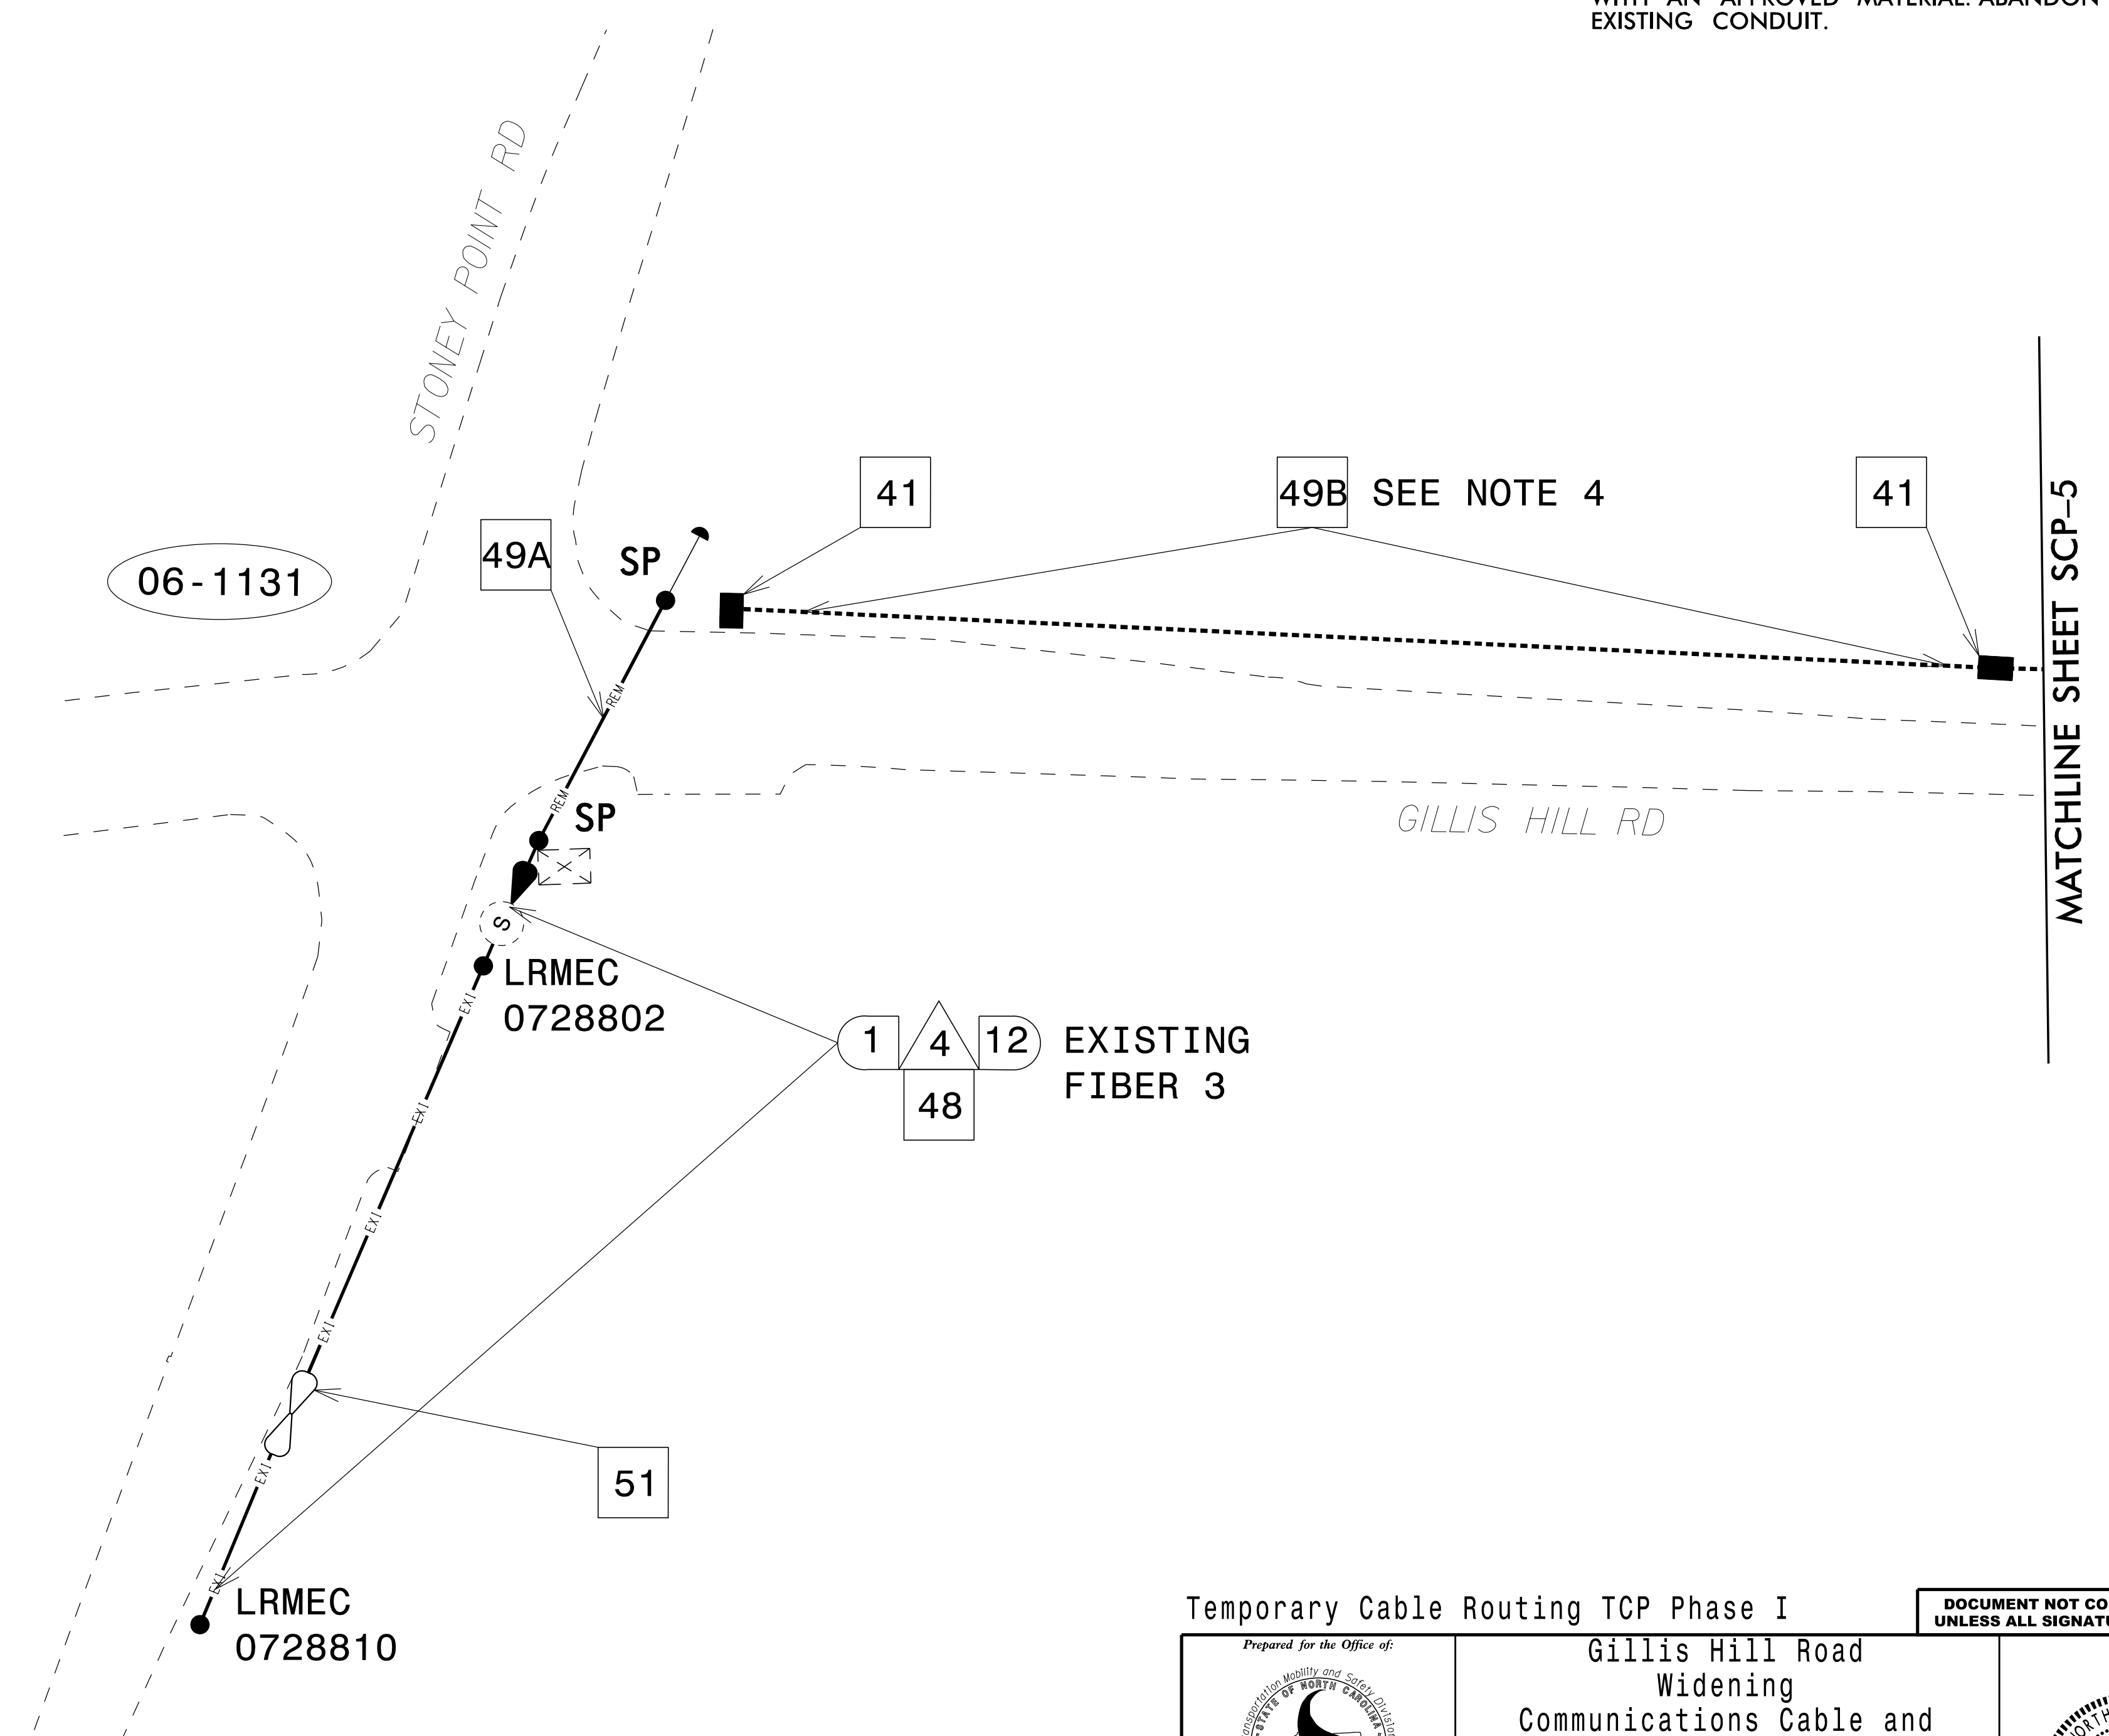

Temporary Cable Routing TCP Phase I

**DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED**

	<b>Gillis Hill Road Widening Communications Cable and Conduit Routing Plans</b>		
	Division 6 Cumberland County Fayetteville		
PLAN DATE: January 2022	REVIEWED BY: S.G. Haynie		
PREPARED BY: D. Drobny	REVIEWED BY: V. Kaiser		
REVISIONS	INIT.	DATE	

CADD Filename: U5798A\_sig\_scp\_04.dgn