


NOTES

1. CONTRACTOR TO RECORD EXISTING SPLICE ARRANGEMENT FOR COMPARISON TO THE SUPPLIED SPLICE DETAILS. IF DISCREPANCIES EXIST, CONTACT THE ENGINEER TO DETERMINE HOW TO PROCEED WITH RESPLICING. PROVIDE AS-BUILT PLANS TO THE ENGINEER IF FINAL SPLICE ARRANGEMENT DIFFERS FROM THE SUPPLIED SPLICE DETAILS.
2. BACK PULL EXISTING FIBERS 1 AND 2 ACROSS US 401 TO THE NORTHEAST CORNER OF THE INTERSECTION. REINSTALL FIBERS 1 AND 2 ACROSS US 401 AND SPLICE AS INDICATED ON SCP-17.
3. REMOVE CCTV CAMERA ASSEMBLY ON EXISTING SOUTHWEST SIGNAL POLE. RETURN TO DIVISION 6 TRAFFIC SERVICES OFFICE.
4. ABANDON EXISTING CONDUIT.

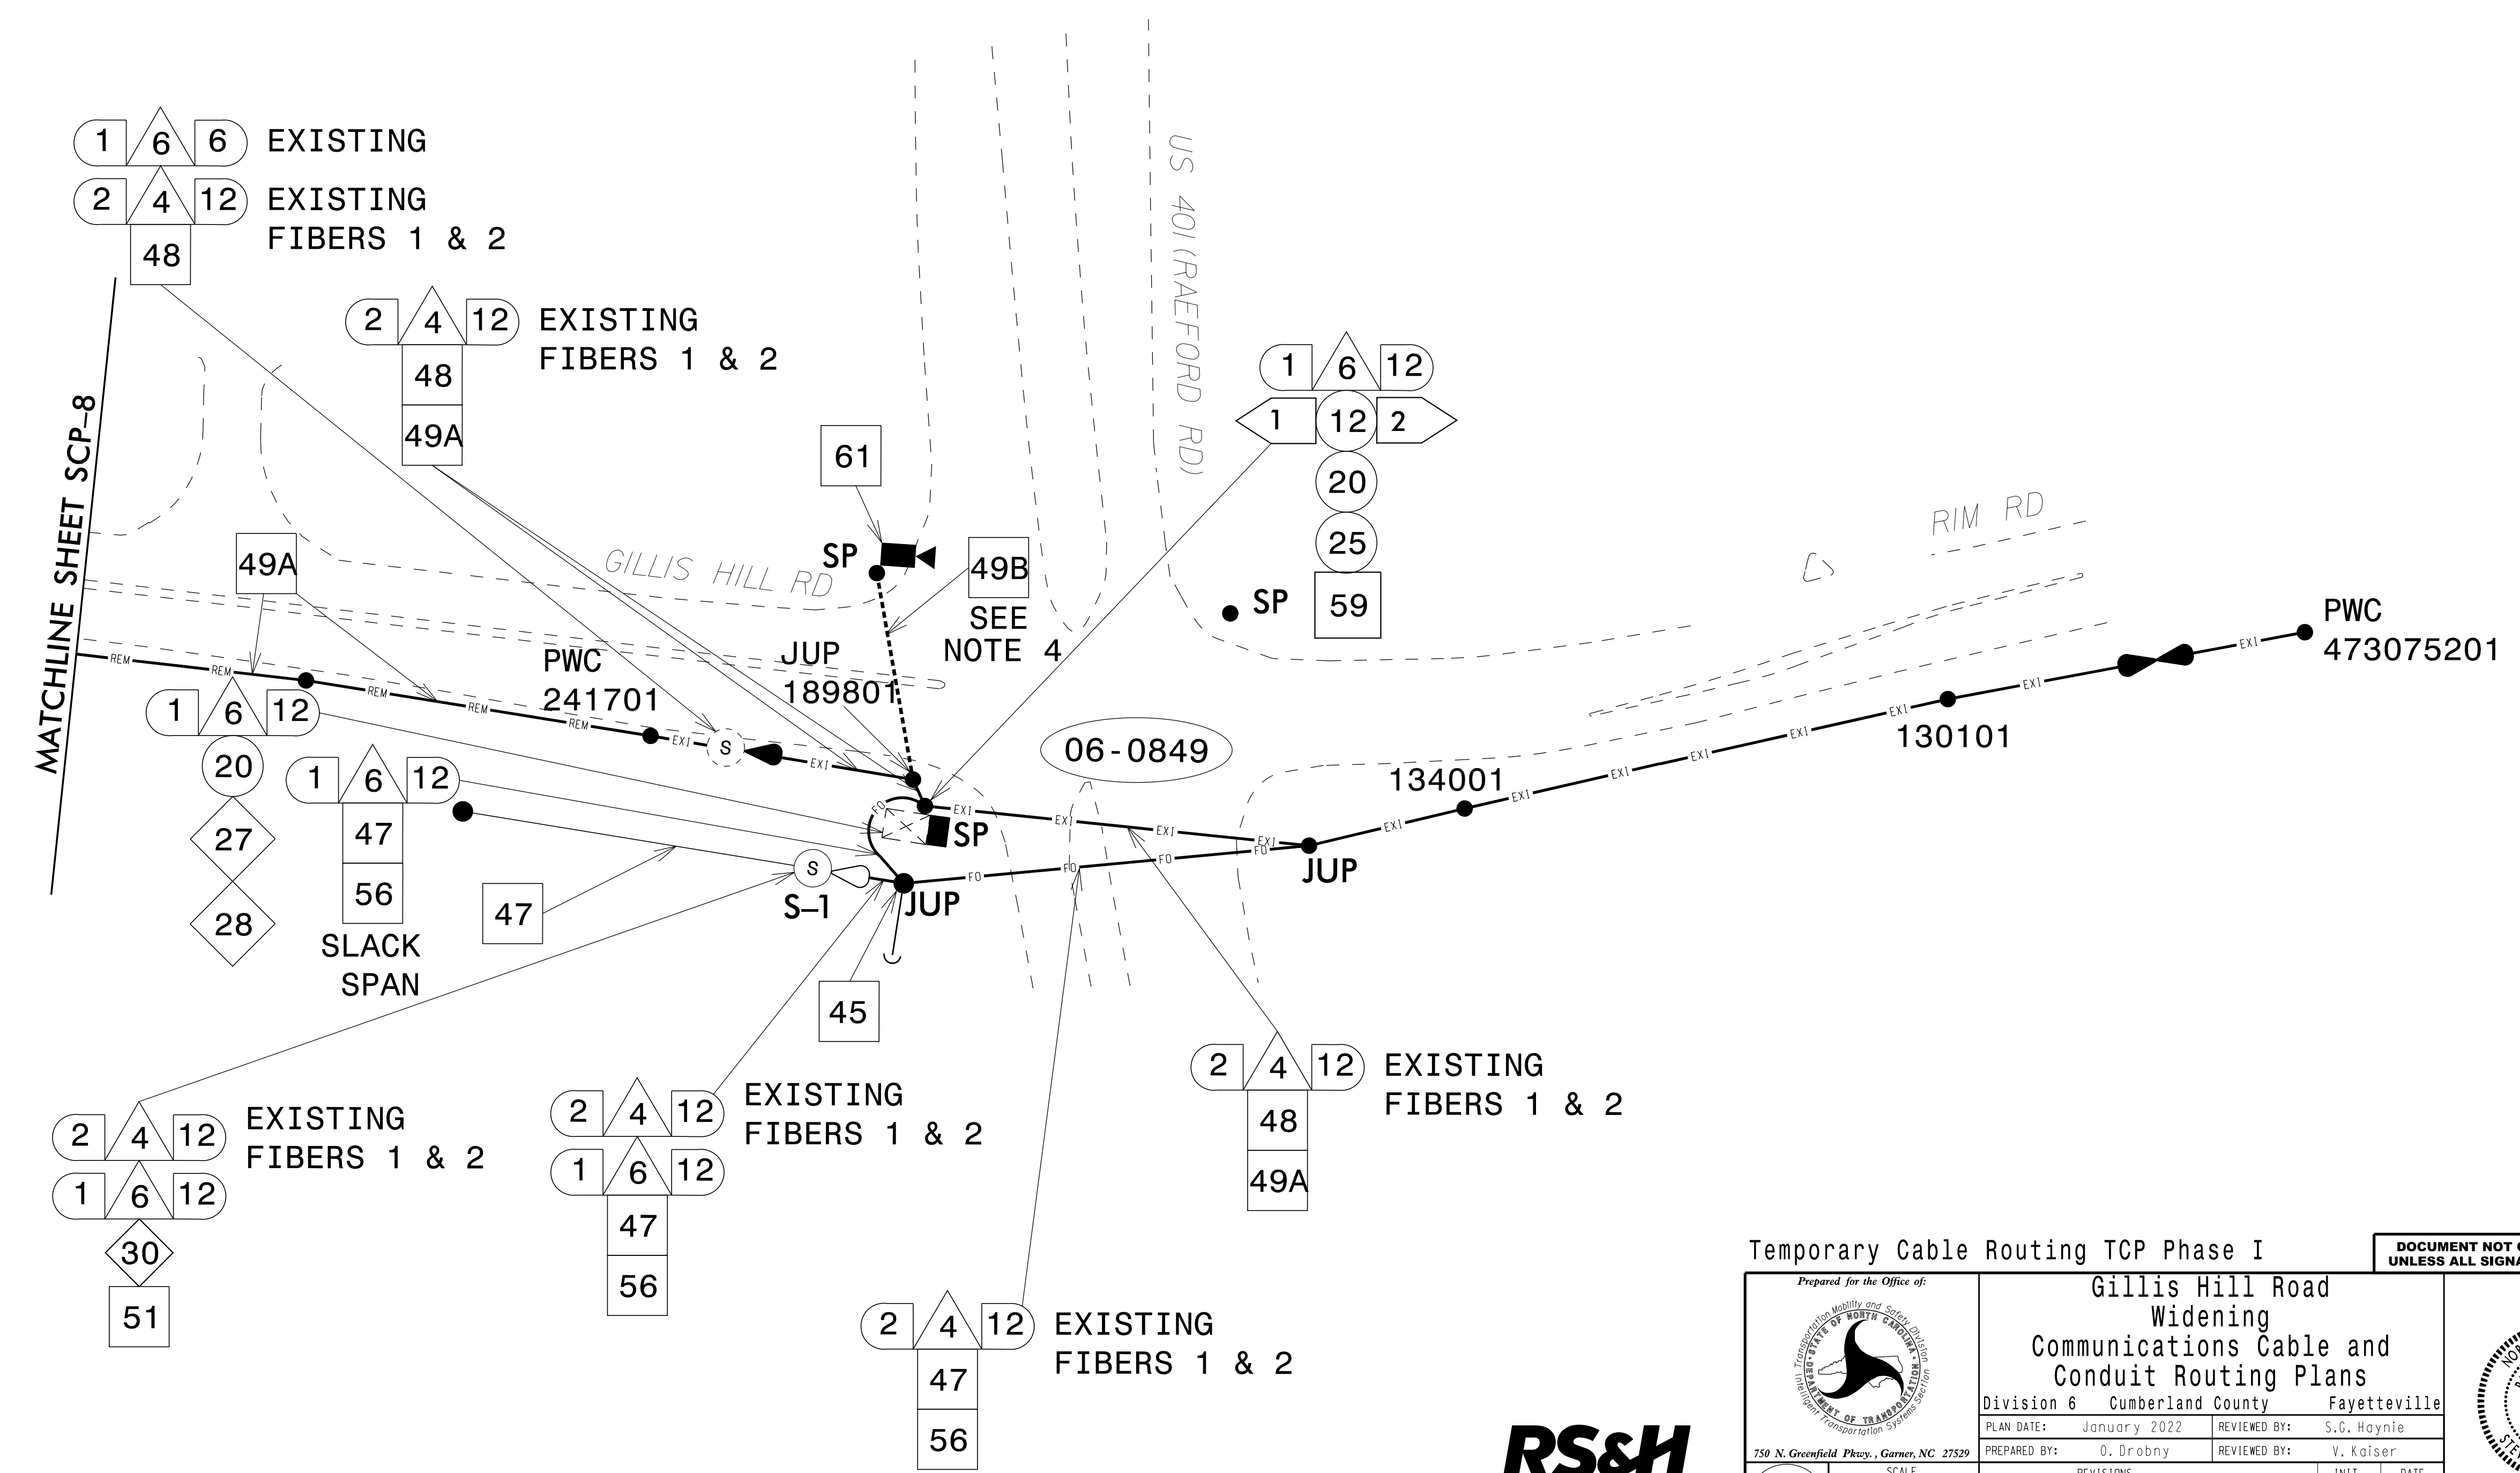

Temporary Cable Routing TCP Phase I		DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED						
	Gillis Hill Road Widening Communications Cable and Conduit Routing Plans Division 6 Cumberland County Fayetteville PLAN DATE: January 2022 REVIEWED BY: S.G. Haynie PREPARED BY: D. Drobny REVIEWED BY: V. Kaiser							
	<table border="1"> <tr> <th>REVISIONS</th> <th>INIT.</th> <th>DATE</th> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> </table>	REVISIONS	INIT.	DATE				Signature: <i>Steven G. Haynie</i> DATE: 1/5/2022 CADD Filename: U5798A_sig_scp_08.dgn
REVISIONS	INIT.	DATE						