


NOTES

1. FIVE (5) DAYS PRIOR TO BEGINNING WORK ON THE SIGNAL SYSTEM, CONTACT THE CITY OF FAYETTEVILLE TRAFFIC ENGINEER AT (910) 433-1660 TO ARRANGE FOR THE CITY TO PROGRAM THE NEW FIELD ETHERNET SWITCHES WITH THE NECESSARY NETWORK CONFIGURATION DATA, INCLUDING BUT NOT LIMITED TO: THE PROJECT IP ADDRESS, DEFAULT GATEWAY, SUBNET MASK AND VLAN ID INFORMATION. NOTIFY THE ENGINEER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND OPERATIONAL.
2. ALL NCDOT ATTACHMENT POINTS ARE 40" BELOW POWER, FRONT SIDE OF POLE, UNLESS OTHERWISE NOTED.
3. CONTRACTOR SHALL COMPLY WITH NESC GUIDELINES FOR INSTALLING NCDOT CABLES ON JOINT-USE POLES.
4. BACK PULL EXISTING FIBER 1 ACROSS US 401 AND RIM ROAD TO NORTHWEST CORNER, DOWN RISER ON WOOD SIGNAL POLE TO EXISTING OVERSIZED PULL BOX. REINSTALL EXISTING FIBER 1 FROM EXISTING OVERSIZED PULL BOX TO EXISTING SPLICE ENCLOSURE S-1 AND SPLICE AS INDICATED ON SCP-18.
5. LOCATE 4" GAS LINE IN SOUTHEAST CORNER BEFORE INSTALLING CONDUIT. HAND DIG IN VICINITY OF GAS LINE.
6. TRANSFER EXISTING INTERCONNECT CENTER AND ETHERNET SWITCH INSTALLED IN TCP PHASE I TO FINAL CABINET LOCATION IN TCP PHASE IV.



K:\Projects\Design\Plan_Sheets\U5798A_sig_scp_10.dgn 3/24/23 PM 3:41:23

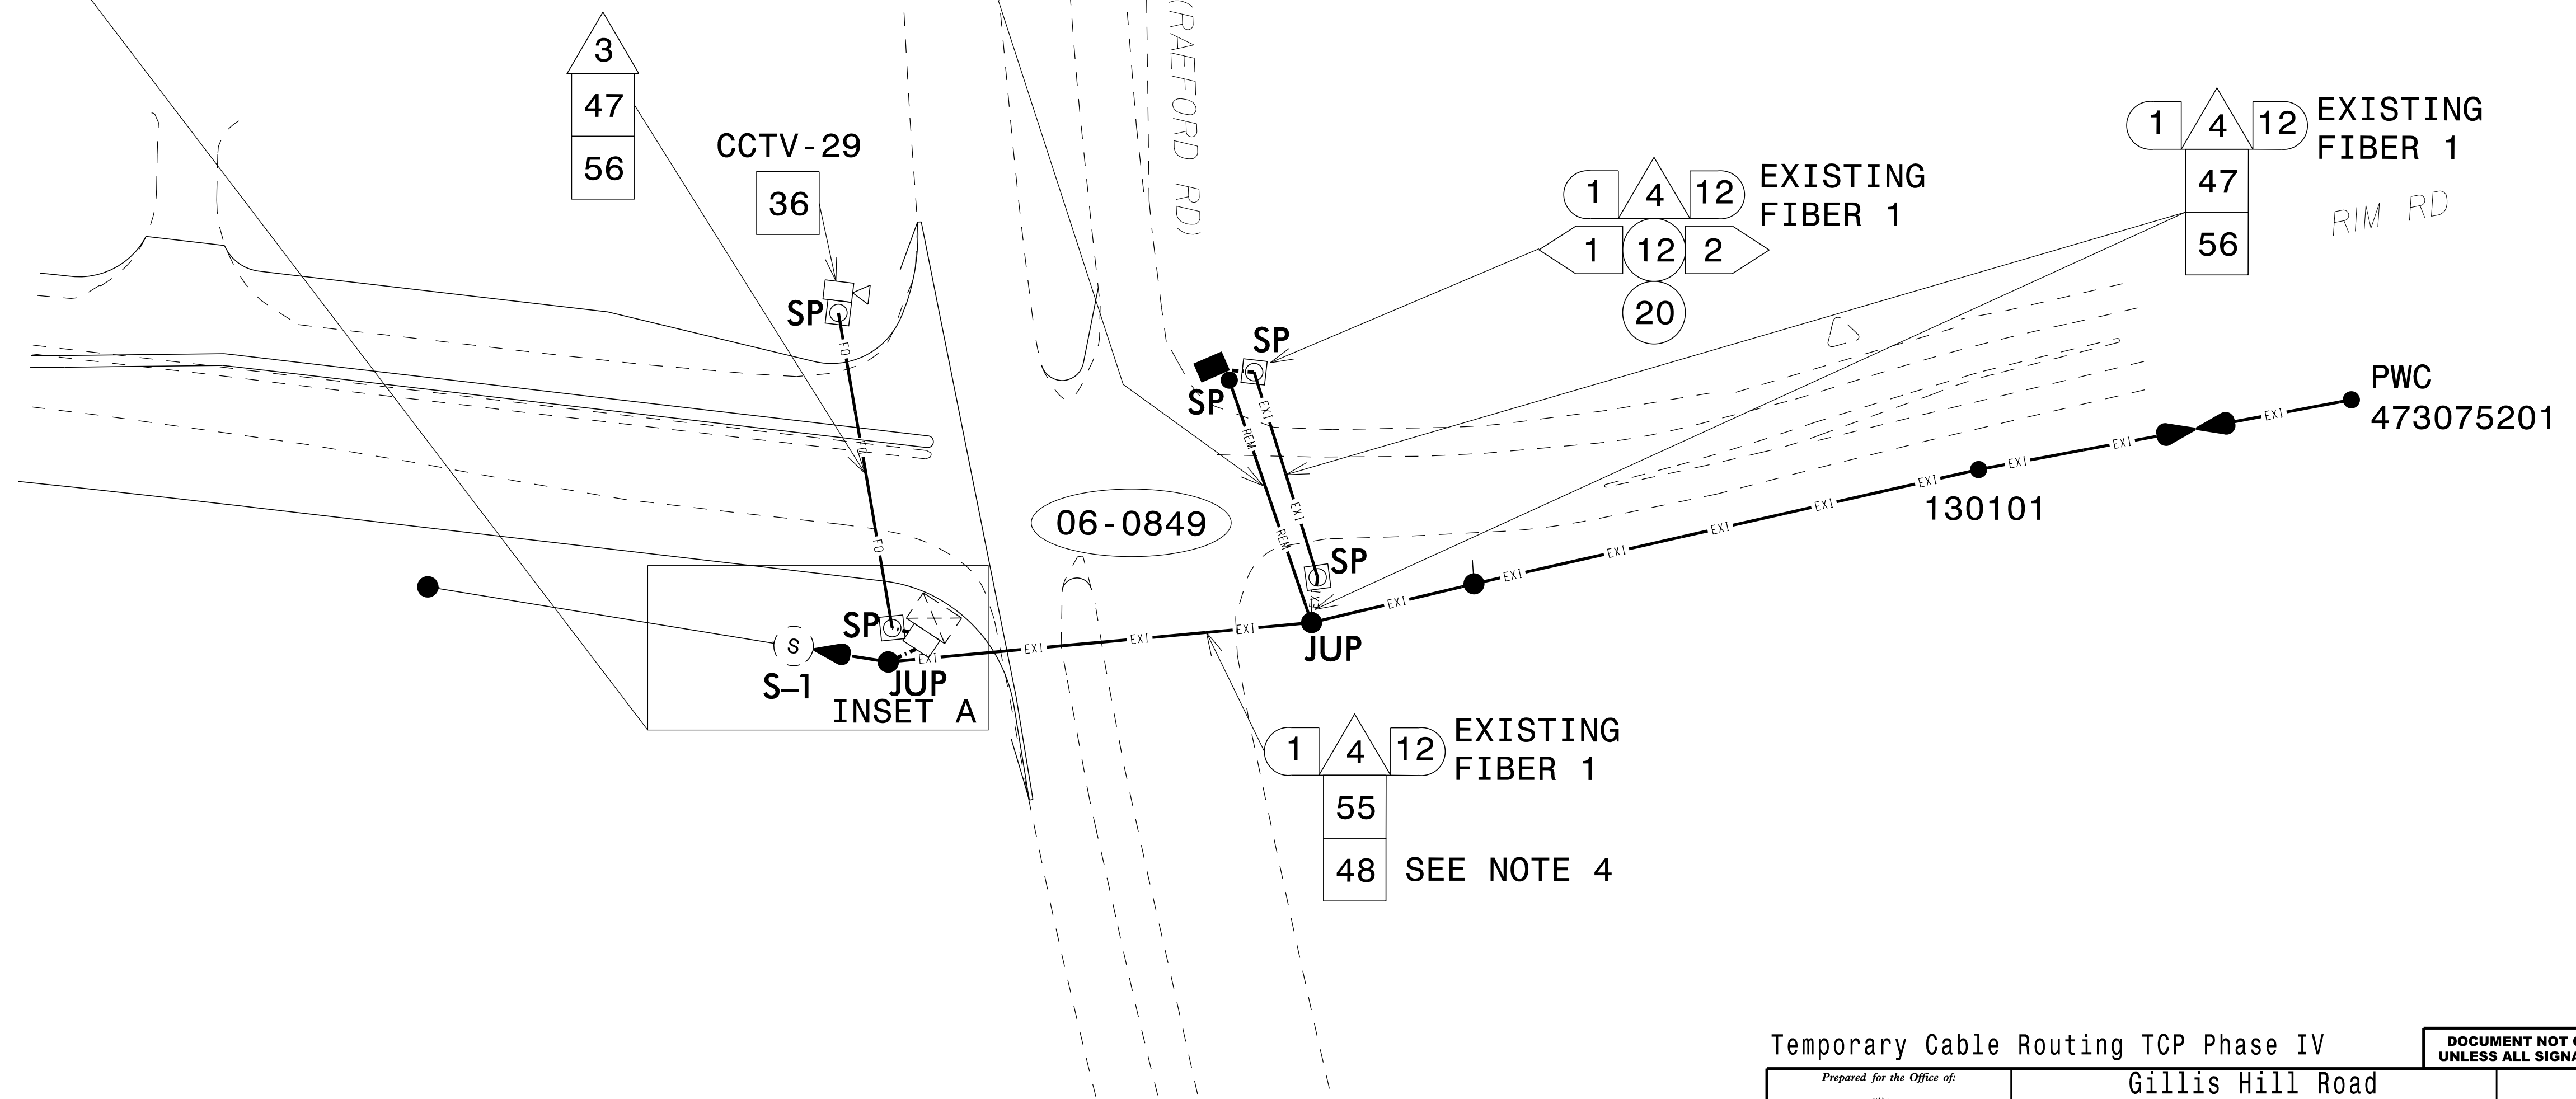

Temporary Cable Routing TCP Phase IV

Prepared for the Office of:

 Gillis Hill Road Widening Communications Cable and Conduit Routing Plans
 Division 6 Cumberland County Fayetteville

PLAN DATE: January 2022 REVIEWED BY: S.G. Haynie
 PREPARED BY: O. Drobny REVIEWED BY: V. Kaiser

REVISIONS	INIT.	DATE

SCALE: 0 50 1"=50'

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL

 Steven G. Haynie 1/5/2022
 SIGNATURE DATE
 CADD Filename: U5798A_sig_scp_10.dgn