

# AS-BUILT REPAIR QUANTITY TABLE

## DECK SURFACE REPAIR SPAN A

	ESTIMATE	ACTUAL
CLASS II SURFACE PREPARATION	0.0 SQ. YDS.	
LMC OVERLAY-ES	19.8 CU. YDS.	
PLACING & FINISHING OF LMC OVERLAY-ES	356.0 SQ. YDS.	
SCARIFYING BRIDGE DECK	356.0 SQ. YDS.	
HYDRO-DEMOLITION OF BRIDGE DECK	356.0 SQ. YDS.	
GROOVING BRIDGE FLOORS	3015.5 SQ. FT.	
BRIDGE JOINT DEMOLITION	94.0 SQ. FT.	

## APPROACH SLAB

	ESTIMATE	ACTUAL
CLASS II SURFACE PREPARATION	0.0 SQ. YDS.	
LMC OVERLAY-ES	17.4 CU. YDS.	
PLACING & FINISHING OF LMC OVERLAY-ES	314.0 SQ. YDS.	
SCARIFYING BRIDGE DECK	314.0 SQ. YDS.	
HYDRO-DEMOLITION OF BRIDGE DECK	314.0 SQ. YDS.	
GROOVING BRIDGE FLOORS	2650.0 SQ. FT.	

### NOTES




TOP OF DECK REPAIR QUANTITIES REPRESENT ESTIMATED VALUES OF CLASS II SURFACE PREPARATION AND CONCRETE DECK REPAIR FOR LMC OVERLAY-ES AFTER REMOVAL OF UNSOUND CONCRETE. (MIN. 2" CLEAR TO SAWCUT). SEE LMC OVERLAY-ES SURFACE PREPARATION SPECIAL PROVISION.


REPAIR LOCATIONS AND ESTIMATE OF QUANTITIES ARE BASED ON THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE AS-BUILT REPAIR QUANTITY TABLE.

FOR SECTIONS A-A AND B-B, SEE "JOINT DETAILS" SHEET.

FOR OVERLAY OF BRIDGE WITH LATEX MODIFIED CONCRETE-EARLY STRENGTH, SEE SPECIAL PROVISIONS.

PAYMENT FOR CLASS II SURFACE PREPARATION IS BASED ON THE SQUARE FEET OF ADDITIONAL DEMOLITION REQUIRED FOLLOWING HYDRO-DEMOLITION OF THE BRIDGE DECK, SEE LMC OVERLAY-EARLY STRENGTH SURFACE PREPARATION SPECIAL PROVISIONS.


-  APPROX. CLASS II SURFACE PREPARATION
-  BRIDGE JOINT DEMOLITION
-  SCARIFYING BRIDGE DECK

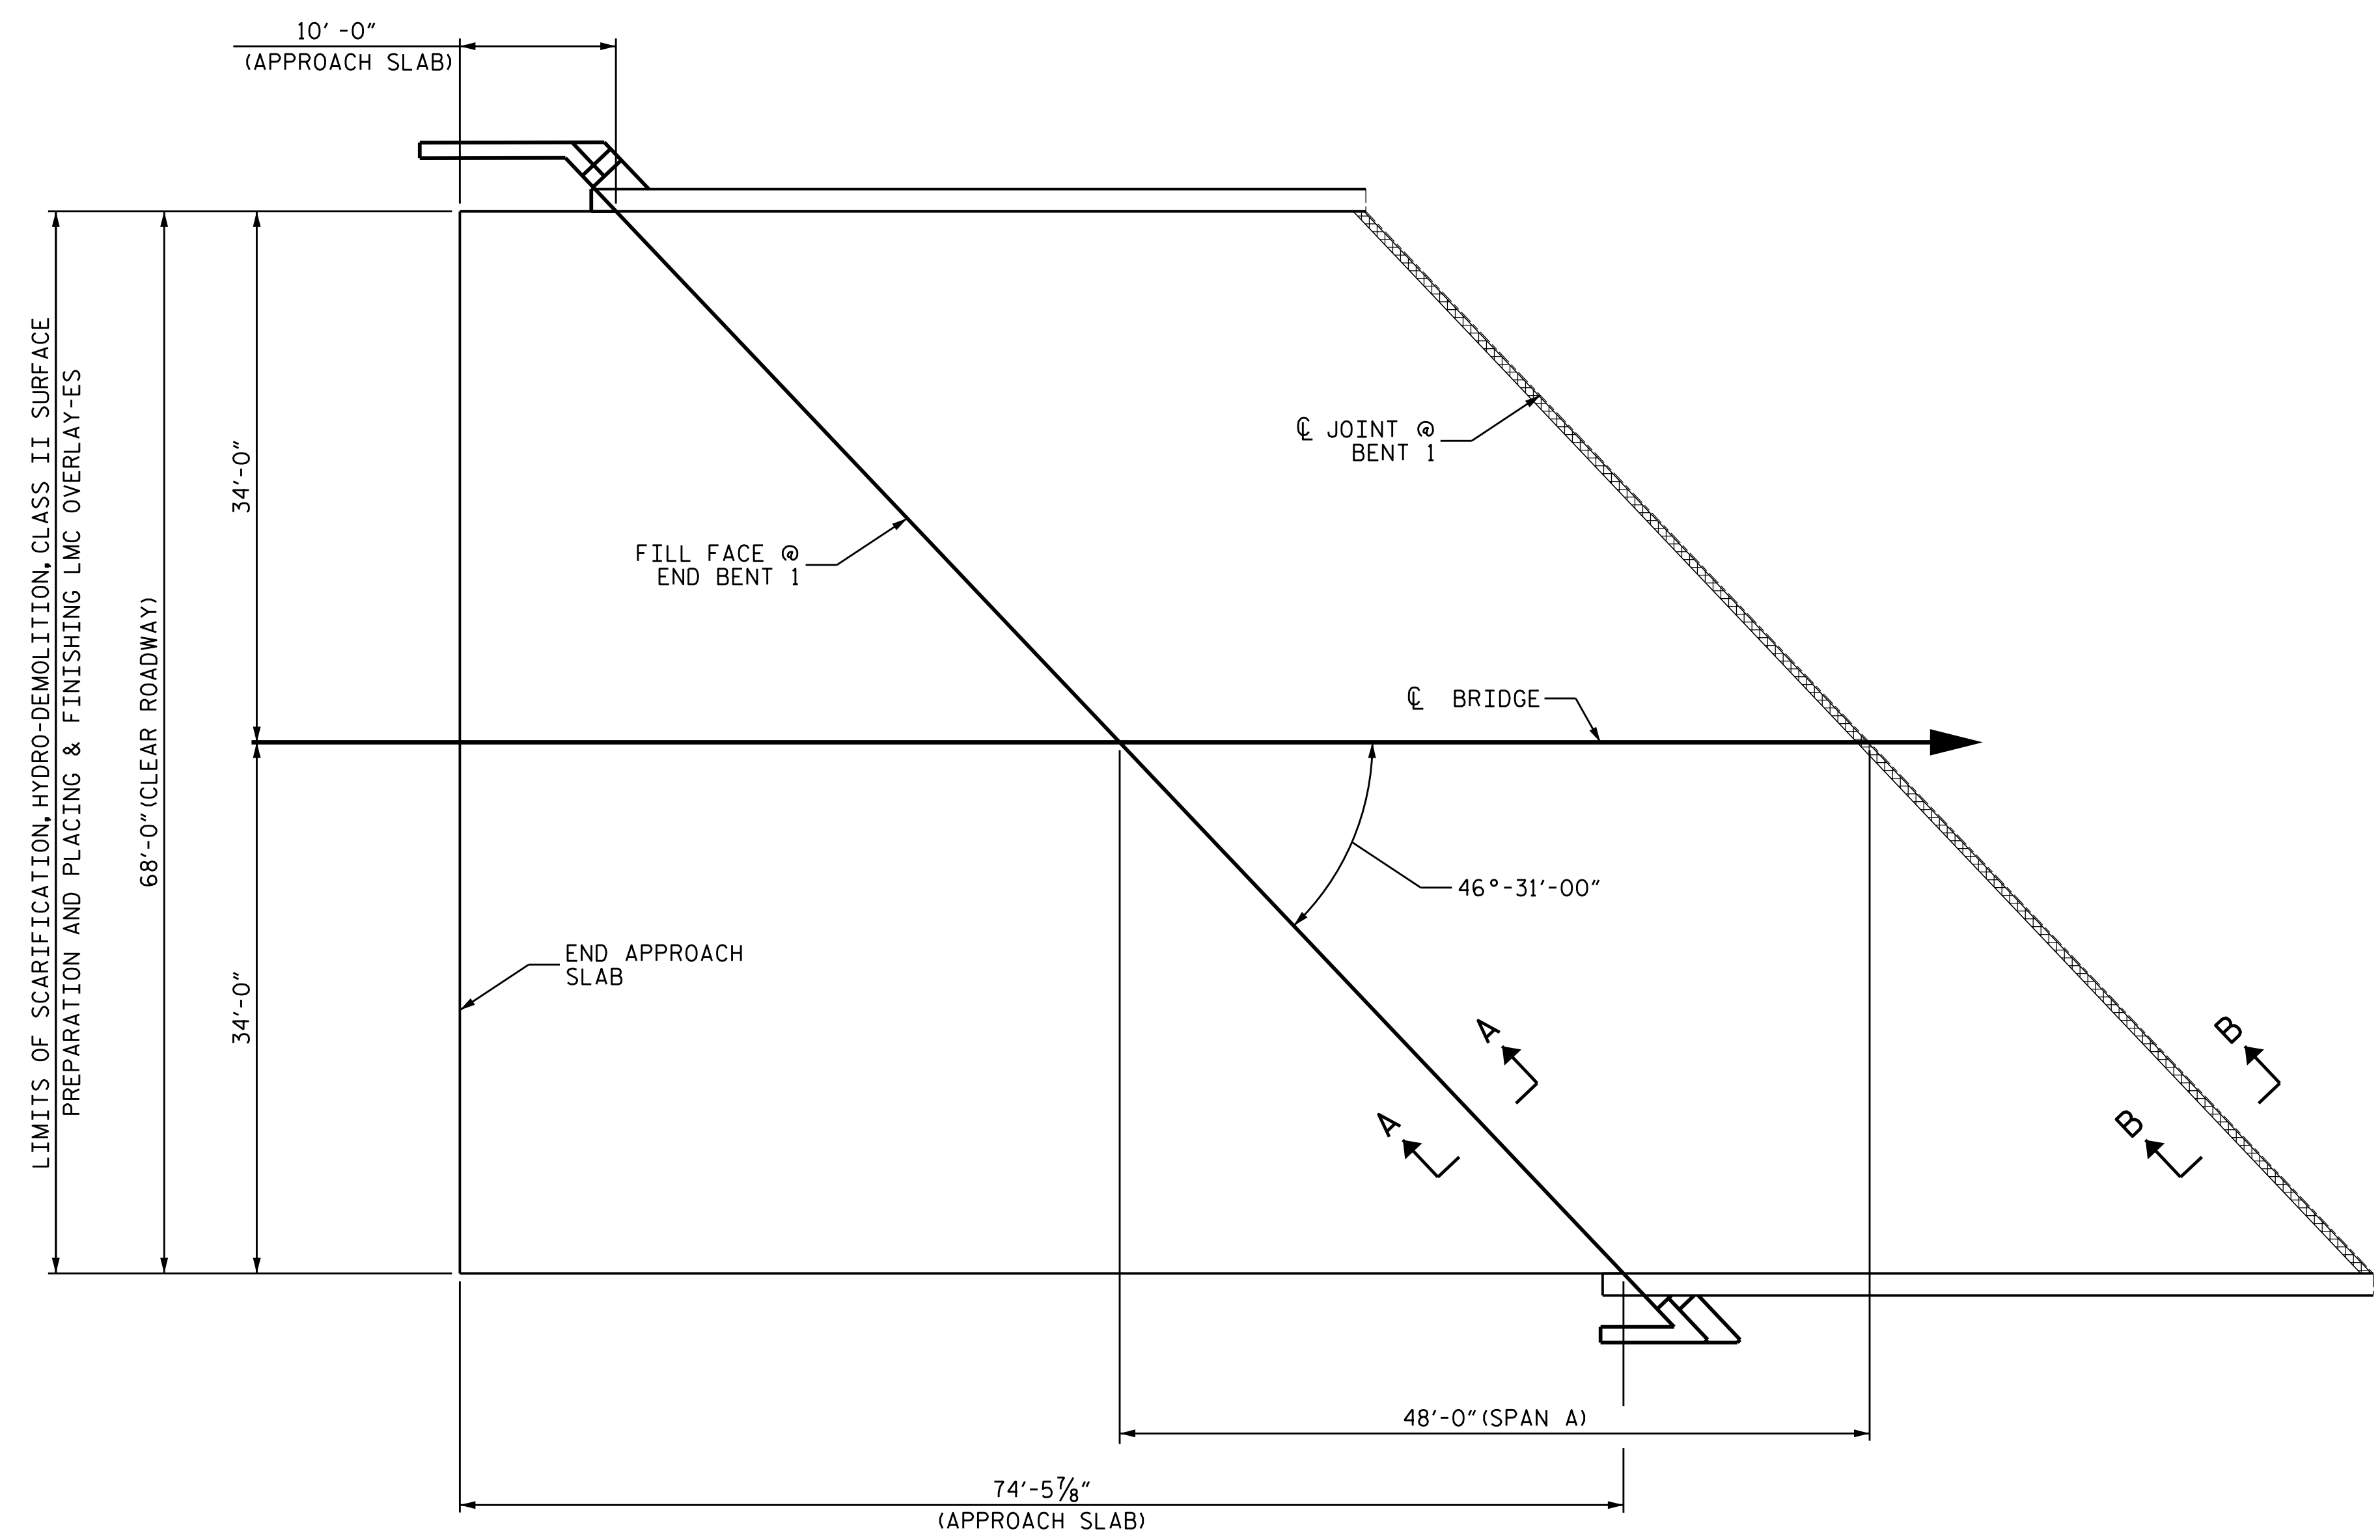

## SPAN A

PROJECT NO. 15BPR.55  
FORSYTH COUNTY  
 BRIDGE NO. 330392

SHEET 1 OF 4

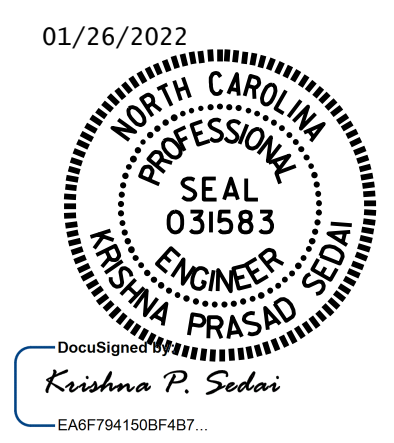

STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH  
**DECK SURFACE REPAIR  
 SPAN A  
 WITH  
 APPROACH SLAB**

DRAWN BY : T.S.PARRISH DATE : .05/2021  
 CHECKED BY : E.BAYISSA DATE : .07/2021

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			S3-04
2			4			TOTAL SHEETS 79

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED