




PROJECT REFERENCE NO.	SHEET NO.
2022CPT.09.05.10341 2022CPT.09.06.20341	10

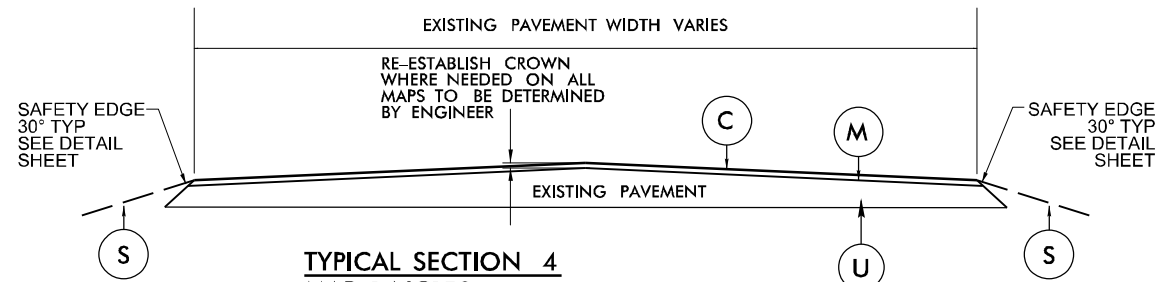


TYPICAL SECTION 4
MAP 1 NC150
MAP 5 CHERRY ST/GERMANTON RD SR1725
MAP 12 S PEACE HAVEN RD SR1891

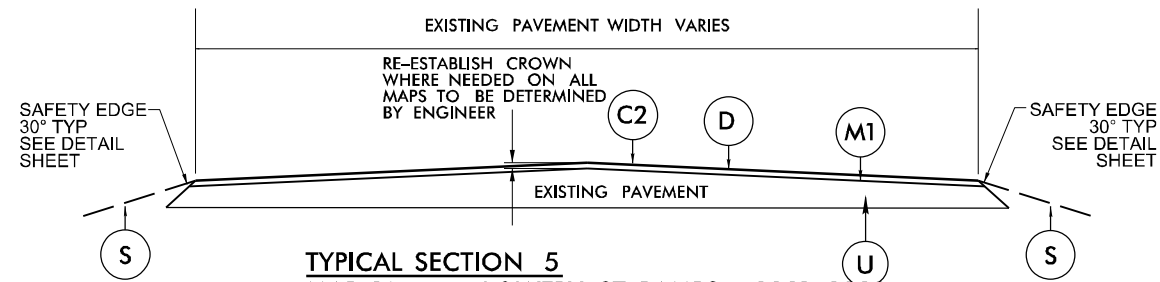

TYPICAL SECTION 5
MAP 10 LOWERY ST RAMPS #3381, 3382

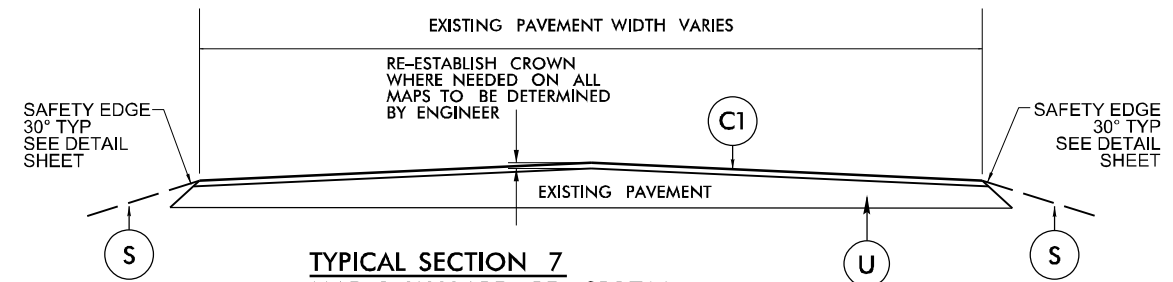

TYPICAL SECTION 7
MAP 3 WILLARD RD SR2700
MAP 8 MCGREGOR RD SR1137
MAP 11 FOLLENSBEE RD SR2931

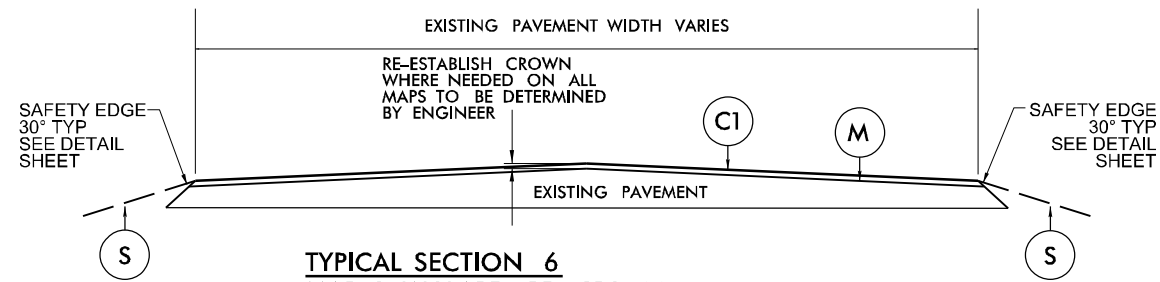

TYPICAL SECTION 6
MAP 3 WILLARD RD SR2700

PAVEMENT SCHEDULE	
C	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, TO BE APPLIED AT AN AVERAGE RATE OF 168 LBS PER SQ YD.
C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, TO BE APPLIED AT AN AVERAGE RATE OF 165 LBS PER SQ YD.
C2	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, TO BE APPLIED AT AN AVERAGE RATE OF 224 LBS PER SQ YD.
D	PROP. APPROX. 4" ASPHALT CONCRETE SURFACE COURSE, TYPE I19.0C, TO BE APPLIED AT AN AVERAGE RATE OF 456 LBS PER SQ YD.
M	MILL ASPHALT PAVEMENT, 1½" DEPTH ENTIRE WIDTH
M1	MILL ASPHALT PAVEMENT, 6" DEPTH ENTIRE WIDTH
M2	MILL ASPHALT PAVEMENT, 1½" TO 0 DEPTH @ 18' WIDTH
S	SHOULDER RECONSTRUCTION (SEE DETAIL)
U	EXISTING PAVEMENT