

BRIDGE DECK QUANTITIES

	ESTIMATE	ACTUAL
SHOTBLASTING BRIDGE DECK	688.3 SQ.YD.	
SILANE DECK TREATMENT	688.3 SQ.YD.	
SURFACE PREPARATION FOR CONCRETE BARRIER	396.0 SQ.FT.	
SILANE BARRIER RAIL TREATMENT	396.0 SQ.FT.	


NOTES:

REPAIR LOCATIONS AND ESTIMATED QUANTITIES ARE GIVEN WITH THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ADJUST QUANTITIES ENTERED INTO AS-BUILT REPAIR QUANTITY TABLE.


QUANTITY FOR SILANE DECK TREATMENT INCLUDES SIDEWALK.

FOR SILANE DECK TREATMENT, SEE SPECIAL PROVISIONS.

FOR SILANE BARRIER RAIL TREATMENT, SEE SPECIAL PROVISIONS.

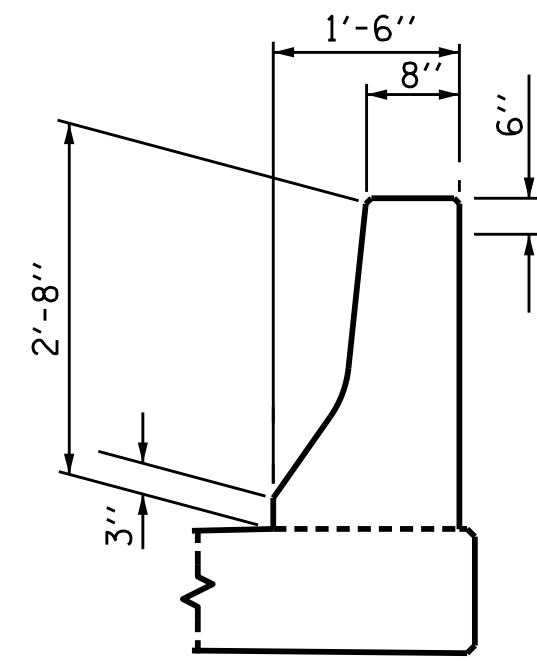

LIMIT OF SILANE BARRIER RAIL APPLICATION.

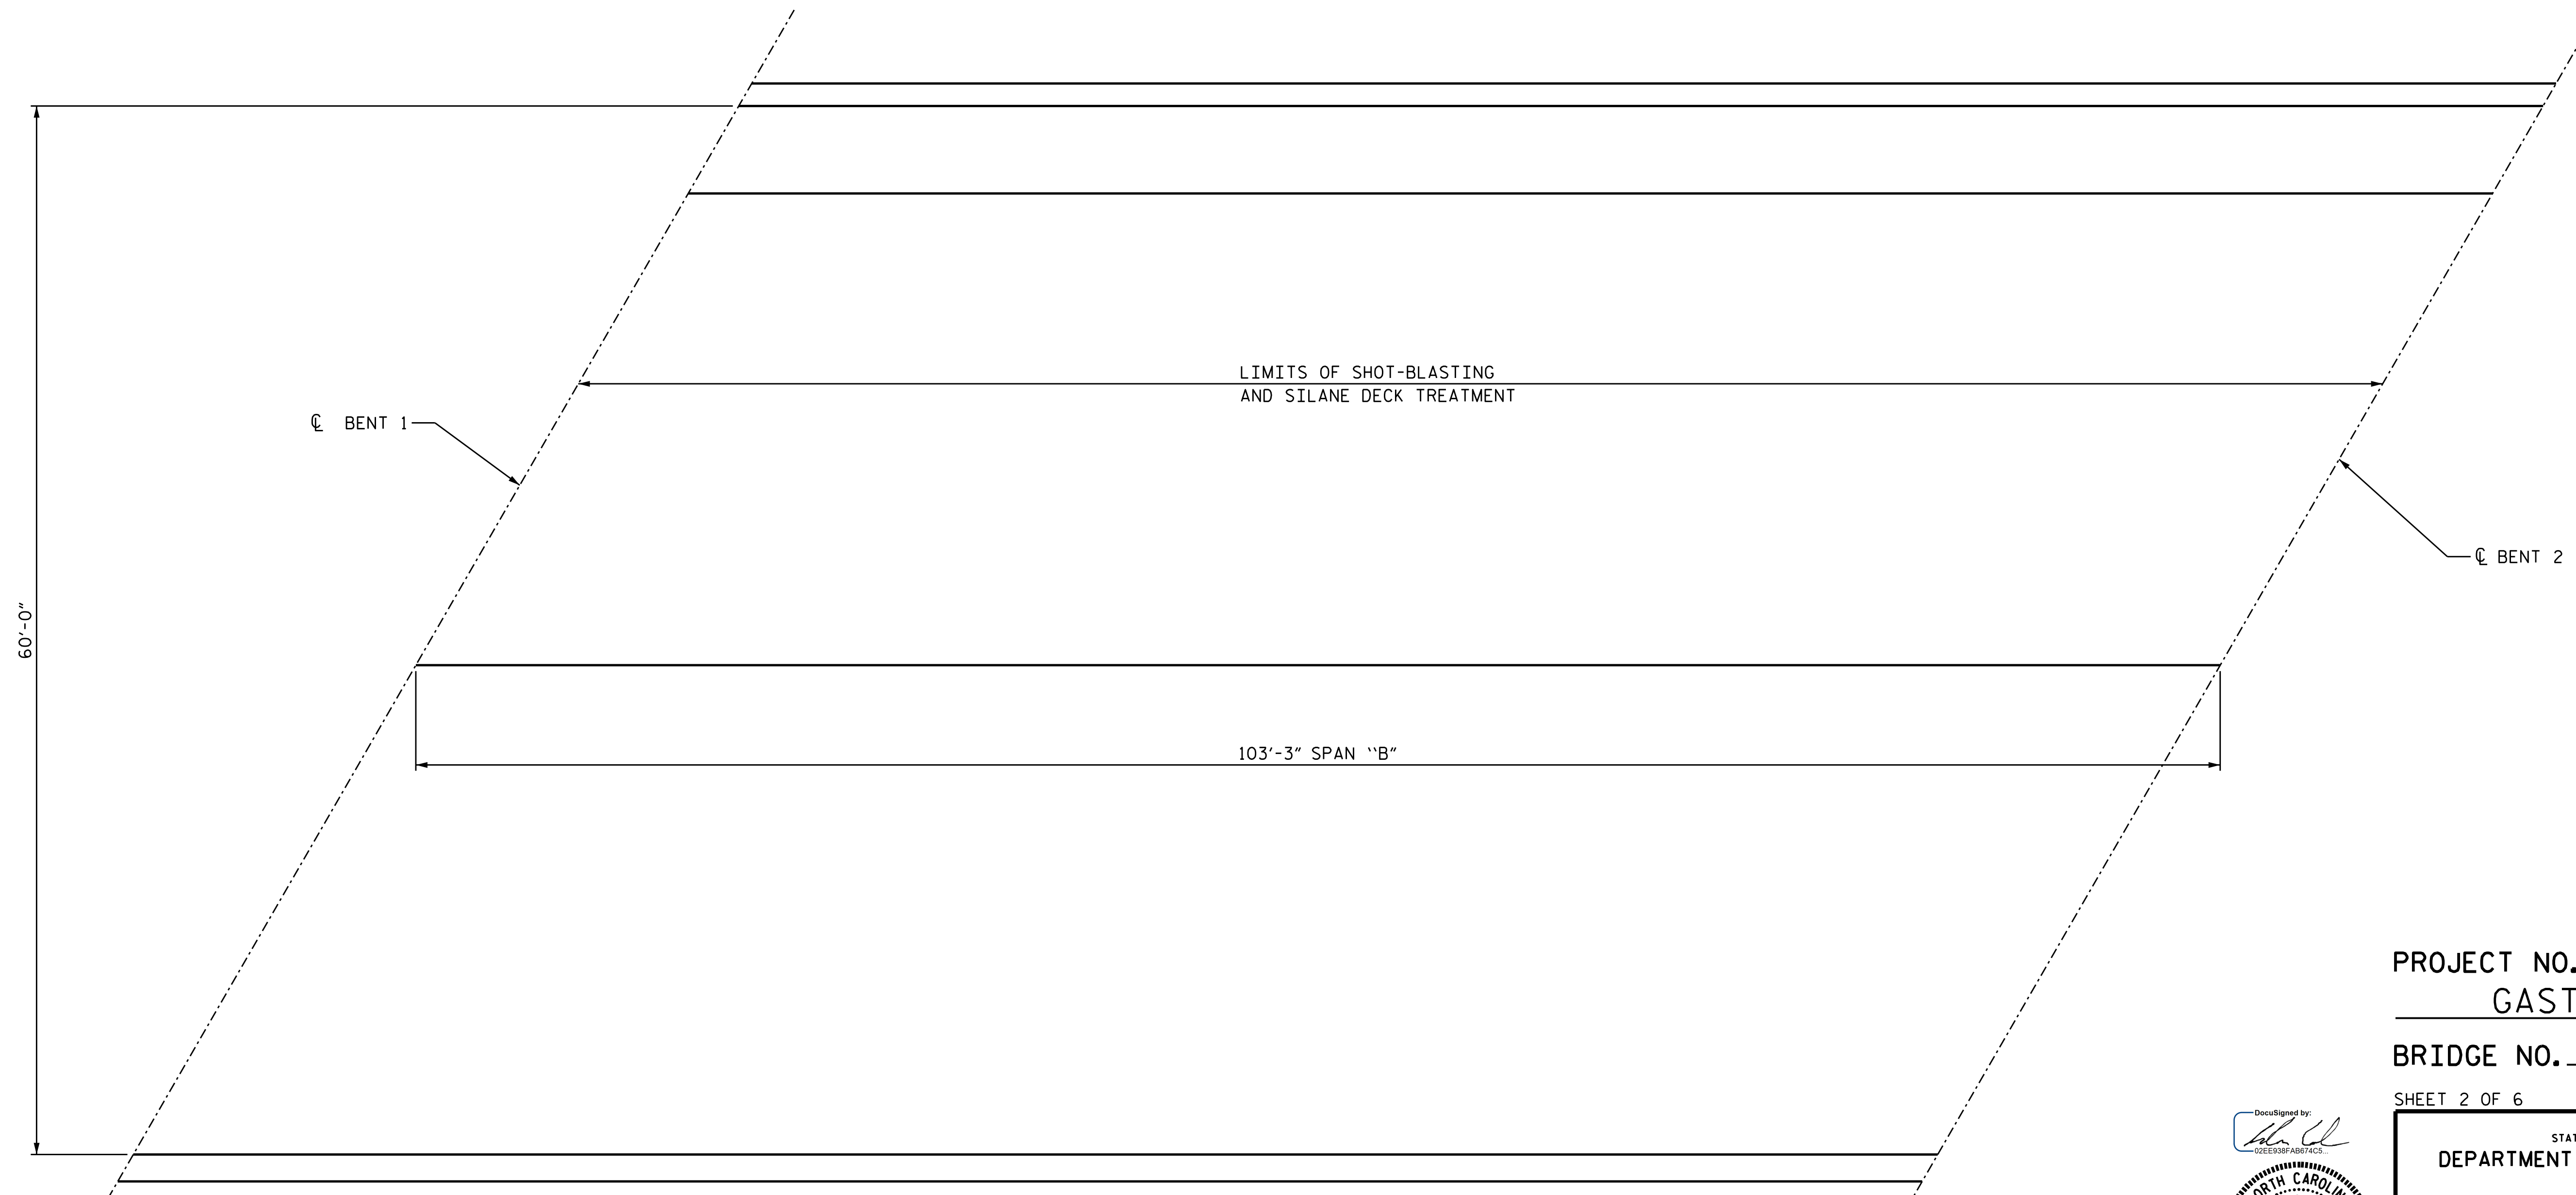


SPAN B

PROJECT NO. 15BPR.51  
GASTON COUNTY  
 BRIDGE NO. 350066

SHEET 2 OF 6

DocuSigned by:  
 02E898FAB074C9...

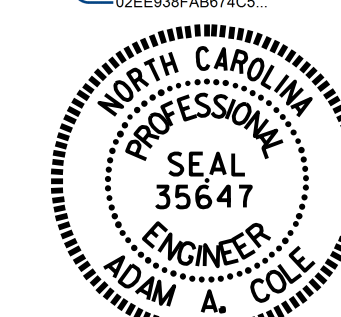

01/25/2022

STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH

PLAN OF SPAN B

DRAWN BY : GHOLAMREZA KOUCHEKI DATE : 11/2021  
 CHECKED BY : H.A. LOCKLEAR DATE : 12/2021

DOCUMENT NOT CONSIDERED  
 FINAL UNLESS ALL  
 SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			S4-06
2			4			TOTAL SHEETS 67