


BRIDGE DECK QUANTITIES

	ESTIMATE	ACTUAL
SHOTBLASTING BRIDGE DECK	750.0 SQ.YD.	
SILANE DECK TREATMENT	750.0 SQ.YD.	
SURFACE PREPARATION FOR CONCRETE BARRIER	431.0 SQ.FT.	
SILANE BARRIER RAIL TREATMENT	431.0 SQ.FT.	


NOTES:

REPAIR LOCATIONS AND ESTIMATED QUANTITIES ARE GIVEN WITH THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ADJUST QUANTITIES ENTERED INTO AS-BUILT REPAIR QUANTITY TABLE.

QUANTITY FOR SILANE DECK TREATMENT INCLUDES SIDEWALK.
FOR SILANE DECK TREATMENT, SEE SPECIAL PROVISIONS.
FOR SILANE BARRIER RAIL TREATMENT, SEE SPECIAL PROVISIONS.

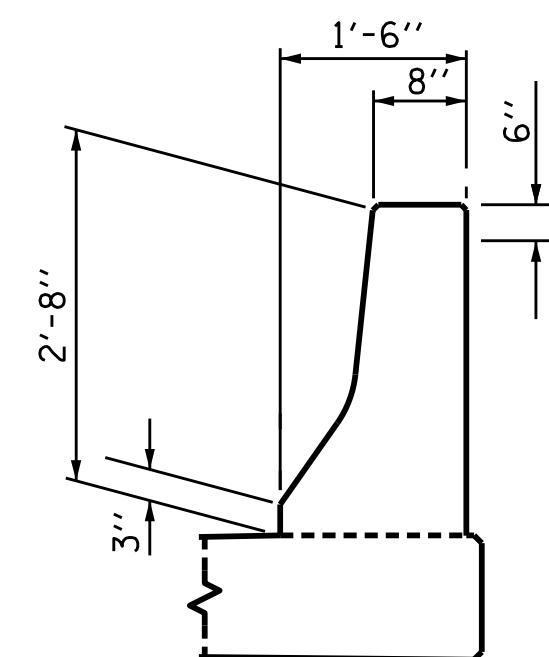


LIMIT OF SILANE BARRIER RAIL APPLICATION.

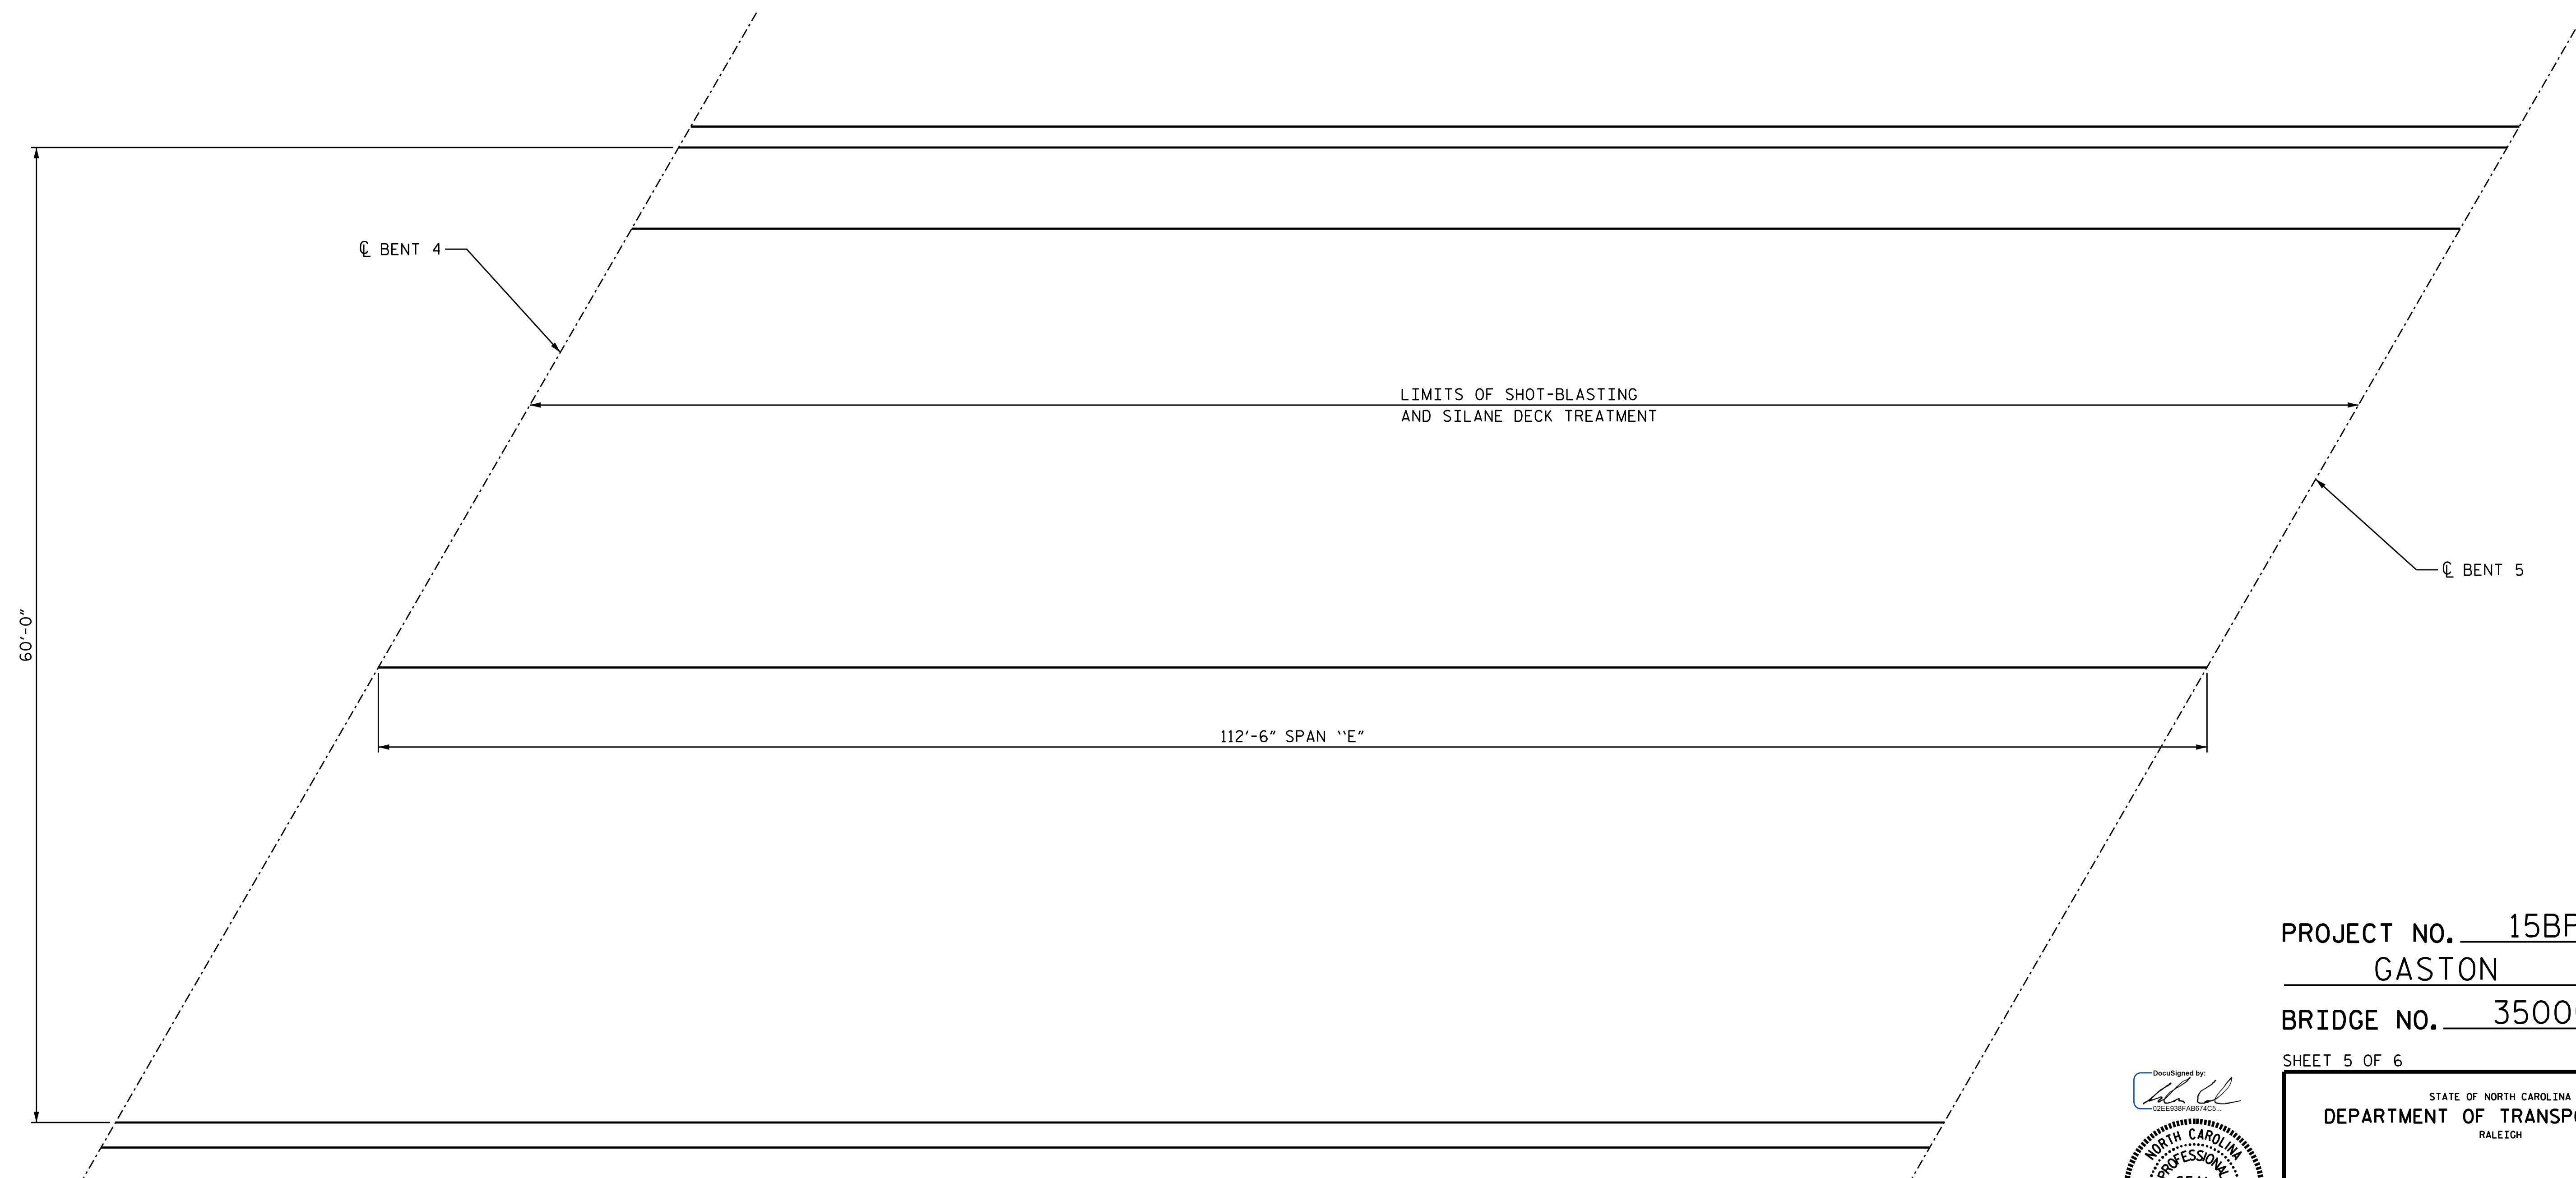

SPAN E

PROJECT NO. 15BPR.51
GASTON COUNTY
BRIDGE NO. 350066

SHEET 5 OF 6

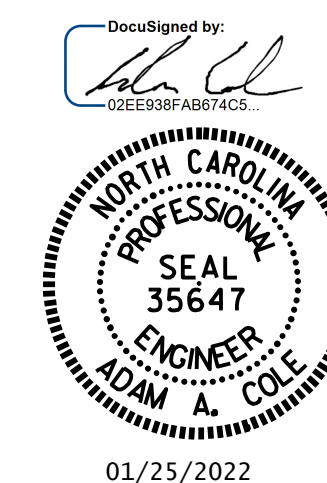

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

PLAN OF SPAN E

DRAWN BY : GHOLAMREZA KOUICHEKI DATE : 11/2021
CHECKED BY : H.A. LOCKLEAR DATE : 12/2021

DOCUMENT NOT CONSIDERED
FINAL UNLESS ALL
SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			S4-09
2			4			TOTAL SHEETS 67