

AS-BUILT REPAIR QUANTITY TABLE

DECK SURFACE REPAIR - SPAN E

	ESTIMATE	ACTUAL
CONCRETE DECK REPAIR	0.6 CU. FT	
CLASS II SURFACE PREPARATION	3.2 SQ. YDS.	
WATERPROOFING MEMBRANE	155.6 SQ. YDS.	
SCARIFYING BRIDGE DECK	155.6 SQ. YDS.	
SHOTBLASTING BRIDGE DECK	155.6 SQ. YDS.	
ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B	20.0 TONS	
ASPHALT BINDER FOR PLANT MIXER	5.0 TONS	
TYPE 11 CONCRETE BARRIER RAIL REPAIR	0.0 LIN. FT.	



NOTES


DECK SURFACE REPAIR QUANTITIES REPRESENT ESTIMATED VALUES OF CLASS II SURFACE PREPARATION AND CONCRETE DECK REPAIR AFTER REMOVAL OF UNSOUND CONCRETE. (MIN. 2" CLEAR TO SAWCUT). SEE CONCRETE FOR DECK REPAIR SPECIAL PROVISION.

REPAIR LOCATIONS AND ESTIMATED QUANTITIES ARE BASED ON THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE AS-BUILT REPAIR QUANTITY TABLE.

FOR "CONCRETE FOR DECK REPAIR", SEE SPECIAL PROVISIONS.

FOR SECTION A-A, SEE "JOINT DETAILS" SHEET.

-  BARRIER RAIL REPAIR AREA
-  CLASS II SURFACE PREPARATION

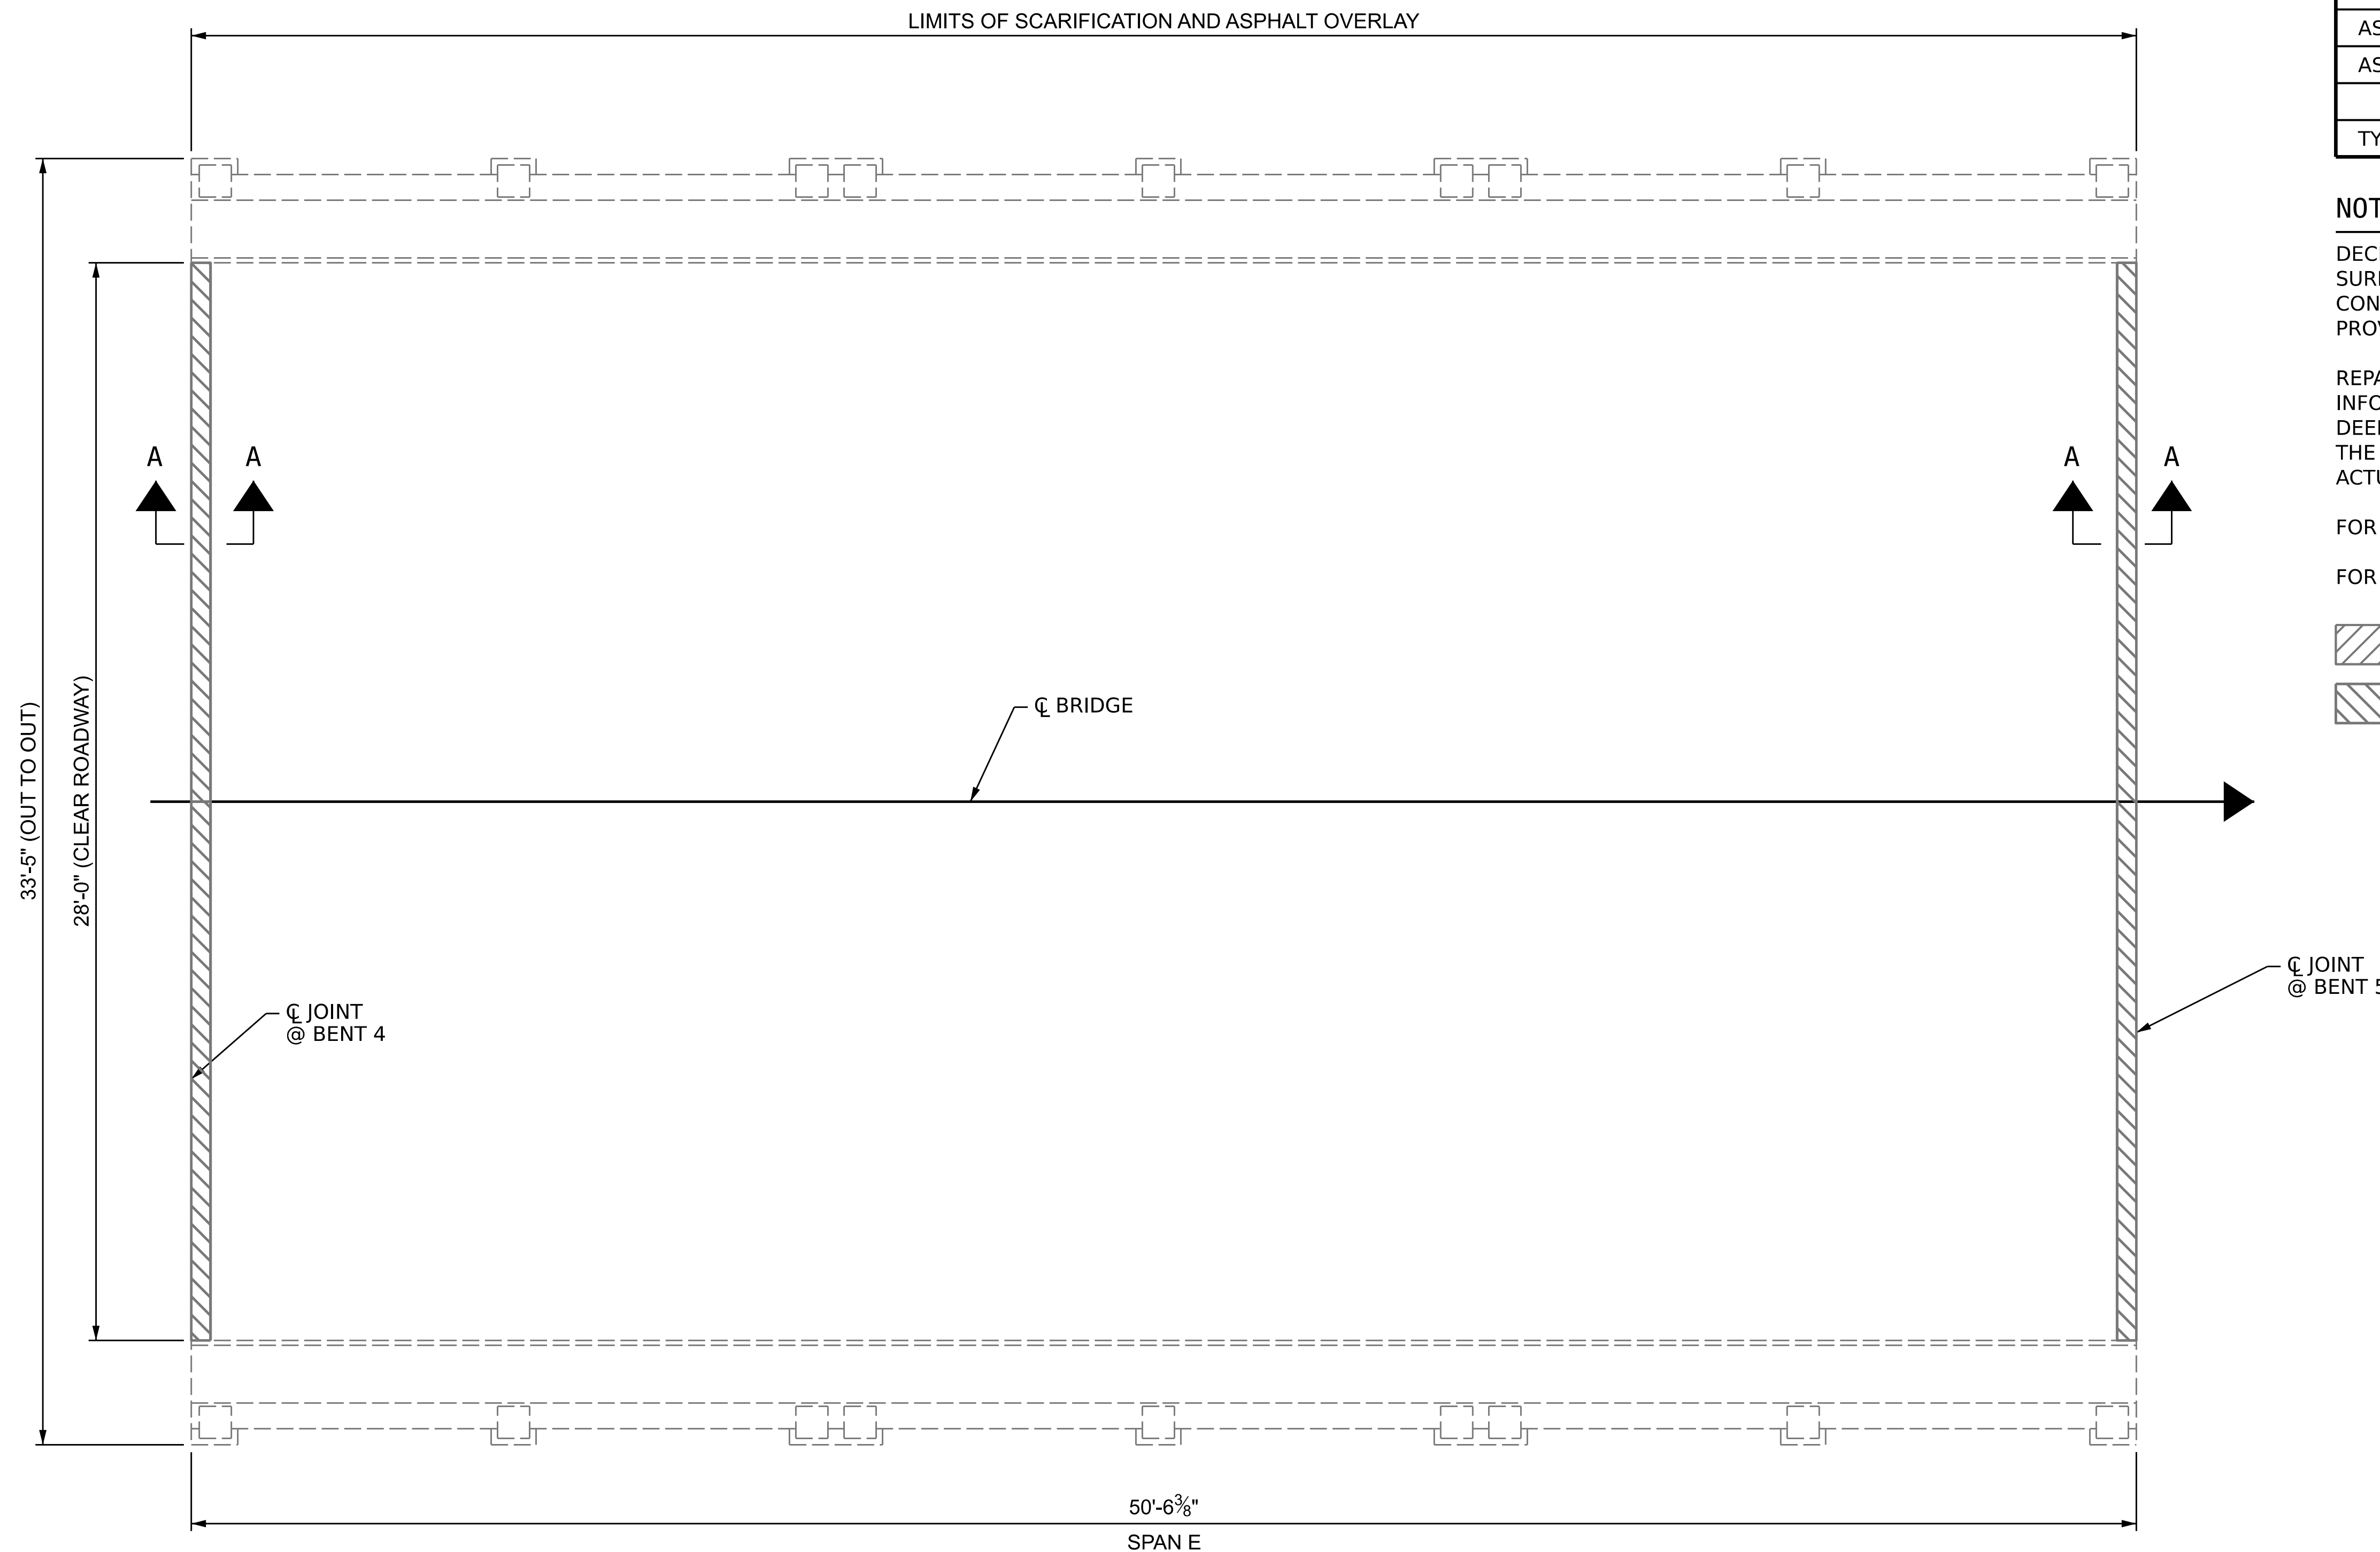

PROJECT NO. **15BPR.49**
WAKE COUNTY
 BRIDGE NO. **910028**

SHEET 5 OF 7

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

DECK SURFACE REPAIR SPAN E



DocuSigned by:
 Nicholas Pierce
 151108434008485...
 01/21/2022

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	SHEET NO.
1			3			S1-07
2			4			TOTAL SHEETS 73

DRAWN BY : N.A. PIERCE DATE : 05/2020
 CHECKED BY : D.A. CANTRELL DATE : 11/2021
 DESIGN ENGINEER OF RECORD : N.A. PIERCE DATE : 11/2021