

**This electronic collection of documents is provided
for the convenience of the user
and is Not a Certified Document –**

**The documents contained herein were originally issued
and sealed by the individuals whose names and license
numbers appear on each page, on the dates appearing
with their signature on that page.**

**This file or an individual page
shall not be considered a certified document.**



PROJECT: BR-0032

CONTRACT: C204484

STATE OF NORTH CAROLINA
DIVISIONS OF HIGHWAYS

SIGNING PLAN MADISON COUNTY

LOCATION: BRIDGE NO. 84 ON NC 209 OVER MEADOW FORK CREEK

PROJECT NO. BR-0032	SHEET NO. SIGN-1
<small>DocuSigned by:</small>	
APPROVED: <u>James A. Speer</u>	
DATE: 3/9/2022	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	
<small>Prepared in the Office of:</small>  <small>NC FIRM LICENSE No: P-0339 504 Meadowlands Drive Hillsborough, NC 27278 (919) 732-3883 (919) 732-6676 (FAX)</small>	

GENERAL NOTES

SIGNS FURNISHED BY STATE

WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER.

ALL TYPE 'D' SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS OTHERWISE INDICATED ON THE PLANS.

WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.

WHEN "BY-PASS" PANELS ARE REMOVED FROM RELOCATED SIGN SYSTEMS, THE REMAINING PANELS SHALL BE ADJUSTED ON THE NEW SUPPORTS.

THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.

ANY SIGNS THAT ARE DAMAGED DURING CONSTRUCTION SHOULD BE REPLACED IN KIND.

SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2018 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
901.50	ARROWS AND SHIELDS
901.70	SIGN STRINGERS AND SUPPORT SPACING
903.10	GROUND MOUNTED SIGN SUPPORTS
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.20	SECONDARY SIGN MOUNTING
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS

SUMMARY OF QUANTITIES

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4025000000	901	CONTRACTOR FURNISHED, TYPE E SIGN	58.75	SF
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL	230.5	LF
4110000000	904	SIGN ERECTION, TYPE E (GROUND MOUNTED)	15	EA
4116100000	904	SIGN ERECTION, RELOCATE TYPE D (GROUND MOUNTED)	2	EA
4116100000	904	SIGN ERECTION, RELOCATE TYPE E (GROUND MOUNTED)	1	EA
4155000000	907	DISPOSAL OF SIGN SYSTEM,U-CHANNEL	4	EA
4192000000	907	DISPOSAL OF SUPPORT, U-CHANNEL	6	EA

PROJECT NOTES

- 1 SIGN REMOVAL, TYPE E (GROUND MOUNTED)
- 2 SIGN ERECTION, RELOCATE TYPE D (GROUND MOUNTED)
- 3 SIGN ERECTION, RELOCATE TYPE E (GROUND MOUNTED)
- 4 RETAIN SIGN IN PLACE

INDEX

SHEET NO.	DESCRIPTION
SIGN-1	TITLE SHEET
SIGN-2	TYPE E SIGNS
SIGN-3	EXISTING & PROPOSED SIGNS

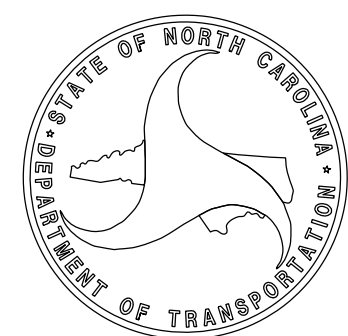
Prepared in the Office of:



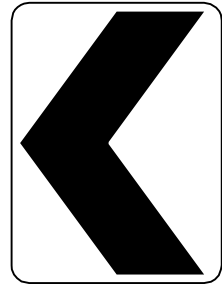
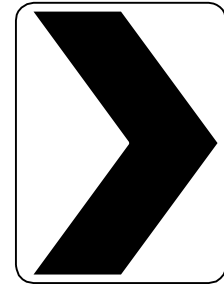

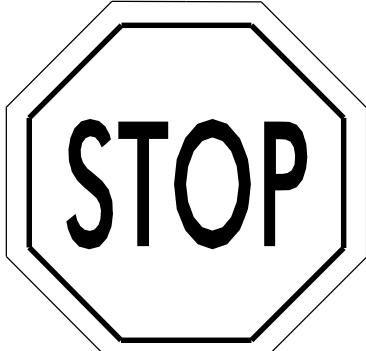


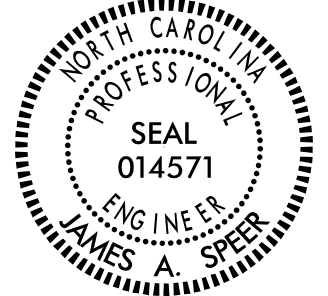

JOSHUA JERNIGAN, EI PROJECT DESIGNER

JAMES A. SPEER, PE PROJECT DESIGN ENGINEER

NC FIRM LICENSE No: P-0339
504 Meadowlands Drive
Hillsborough, NC 27278
(919) 732-3883
(919) 732-6676 (FAX)



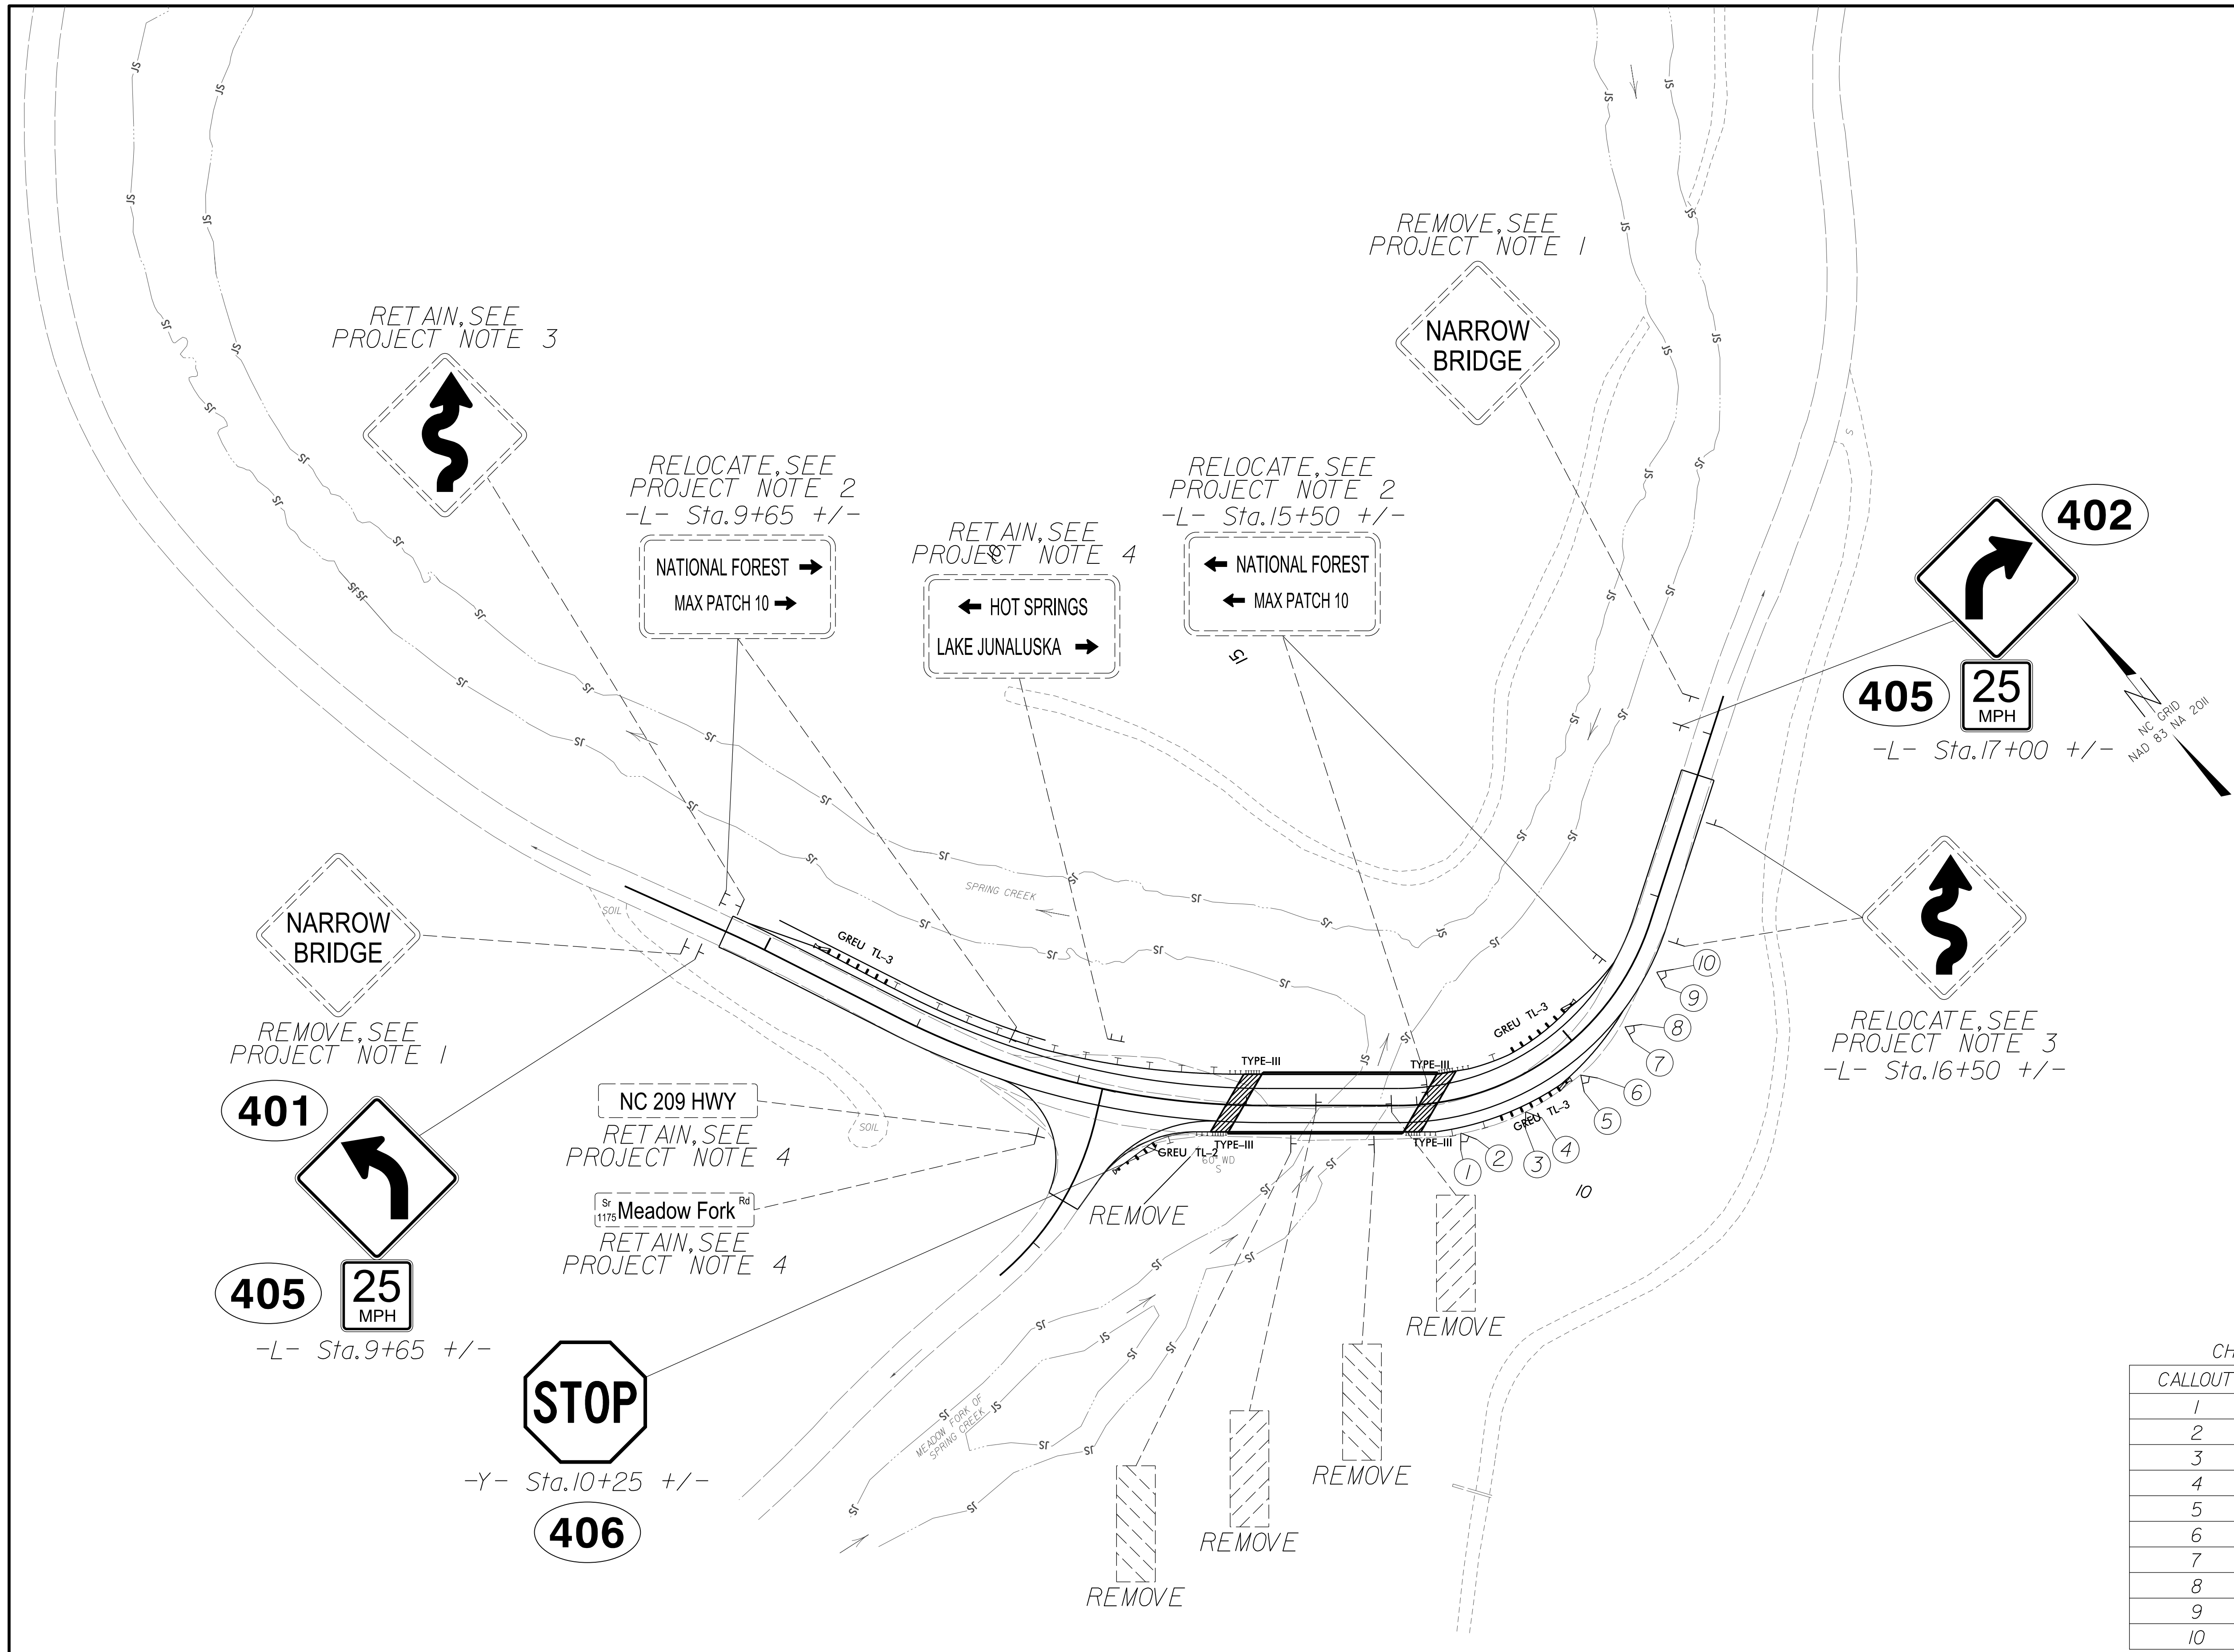
<p>401 QUANTITY REQ.: 1</p>  <p>W1-2L 36" X 36" ONE "U" POST PER SIGN</p>	<p>402 QUANTITY REQ.: 1</p>  <p>W1-2R 36" X 36" ONE "U" POST PER SIGN</p>	<p>403 QUANTITY REQ.: 5</p>  <p>W1-8L 18" X 24" ONE "U" POST PER SIGN</p>	<p>404 QUANTITY REQ.: 5</p>  <p>W1-8R 18" X 24" ONE "U" POST PER SIGN</p>	<p>405 QUANTITY REQ.: 2</p>  <p>W13-1G 24" X 24"</p>	<p>406 QUANTITY REQ.: 1</p>  <p>R1-1 30" X 30" ONE "U" POST PER SIGN</p>

TIP NO. BR-0032	SHEET NO. SIGN-2
APPROVED: <i>James H. Speer</i> <small>966228065040F</small>	
DATE: 3/10/2022	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	
Prepared in the Office of:	
	<small>NC FIRM LICENSE No. P-0339 504 Meadowslands Drive Windsor Park, NC 27719 919-732-3883 (919) 732-6616 (Fax)</small>

10-MAR-2022 08:25
 BR-0032 SIGN-2.dgn
 spencer.merritt

TYPE "E" SIGNS

TIP NO. BR-0032	SHEET NO. SIGN-3
APPROVED: <i>James A. Speer</i> 985202906044DF	
DATE: 3/9/2022	
SEAL	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	
Prepared in the Office of:	



402

405

25 MPH

-L- Sta. 17+00 +/-

NO GRID
NAD 83 NA ZONE

401

405

25 MPH

-L- Sta. 9+65 +/-

406

STOP

-Y- Sta. 10+25 +/-

404 R =

403 L =

CHEVRON SUMMARY TABLE

CALLOUT	SIGN	STATION
1	L	14+20 +/-
2	R	14+20 +/-
3	L	14+60 +/-
4	R	14+60 +/-
5	L	15+00 +/-
6	R	15+00 +/-
7	L	15+40 +/-
8	R	15+40 +/-
9	L	15+80 +/-
10	R	15+80 +/-

EXISTING & PROPOSED SIGNS