
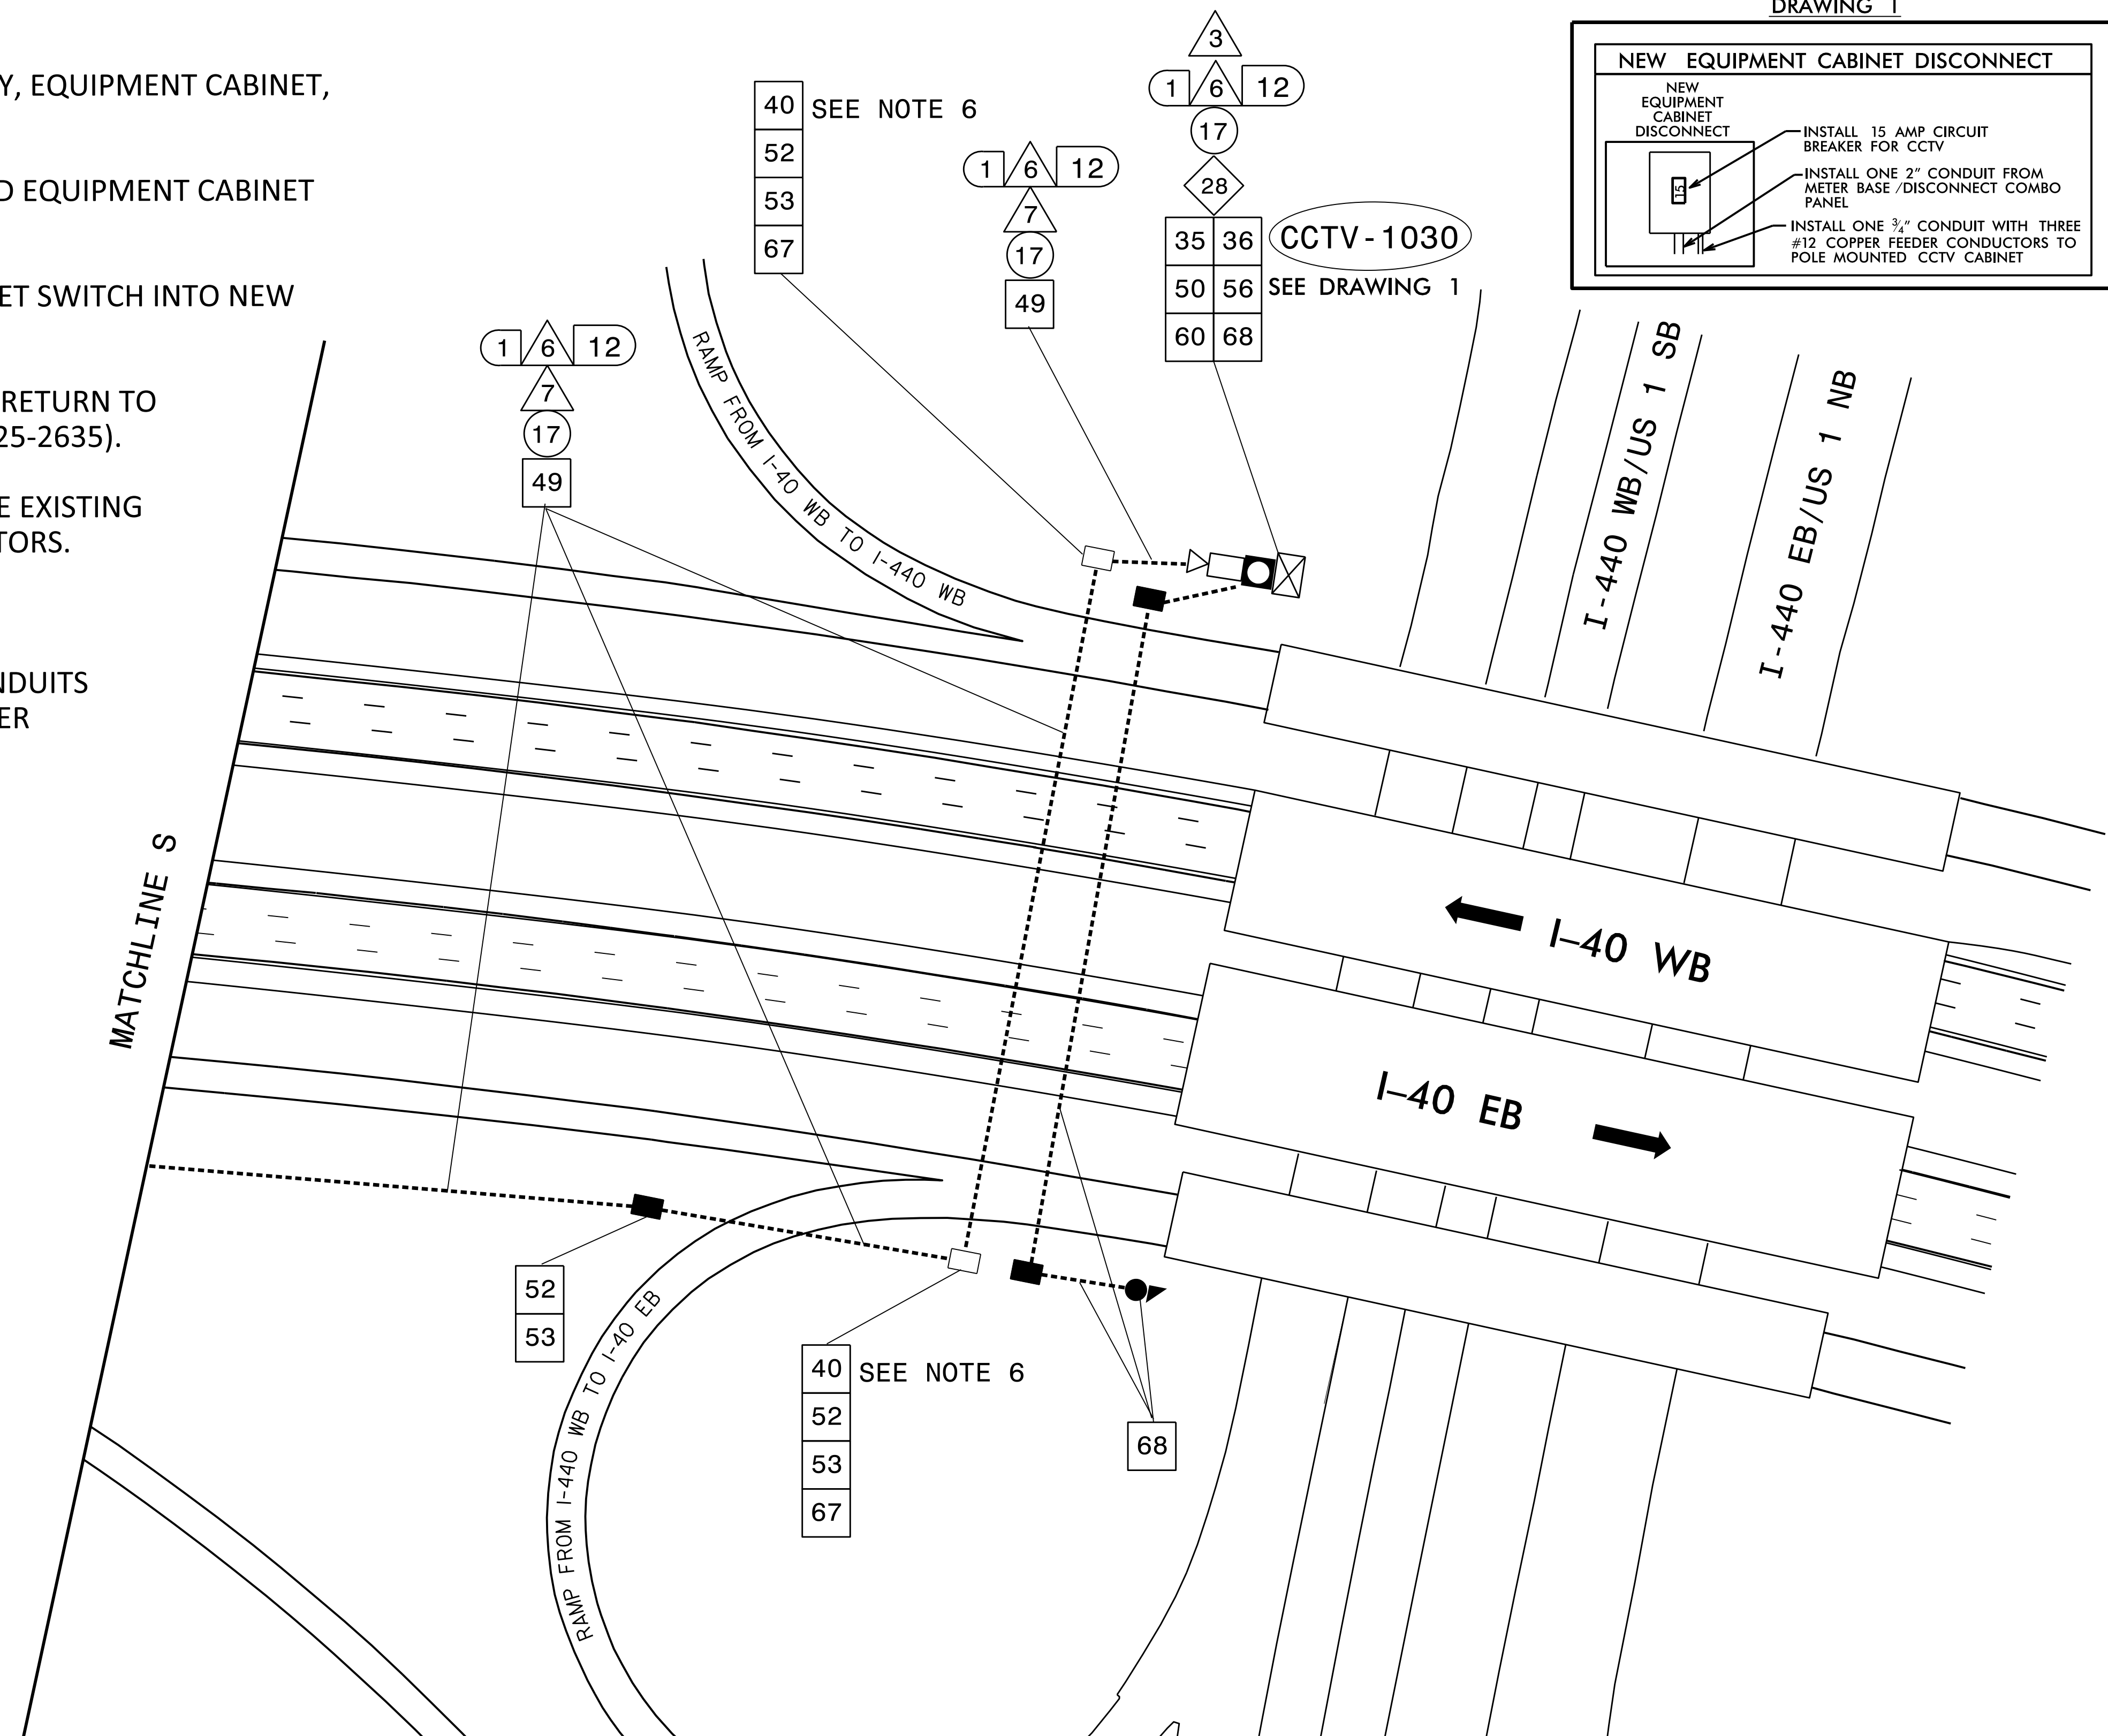


**NOTES**

1. REMOVE EXISTING CCTV CAMERA ASSEMBLY, EQUIPMENT CABINET, AND INTERCONNECT CENTER.
2. INSTALL NEW CCTV CAMERA ASSEMBLY AND EQUIPMENT CABINET ON EXISTING CCTV METAL POLE.
3. INSTALL NEW INTERCONNECT AND ETHERNET SWITCH INTO NEW EQUIPMENT CABINET.
4. REMOVE EXISTING ETHERNET SWITCH AND RETURN TO DIVISION 5 REGIONAL ITS ENGINEER (919-825-2635).
5. CONTRACTOR SHALL MAINTAIN AND RE-USE EXISTING ELECTRICAL SERVICE AND FEEDER CONDUCTORS.
6. REMOVE EXISTING SPLICE ENCLOSURE.
7. INSTALL MOLDABLE DUCT SEAL ON ALL CONDUITS CONTAINING FIBER OPTIC CABLE AND FEEDER CONDUCTORS.

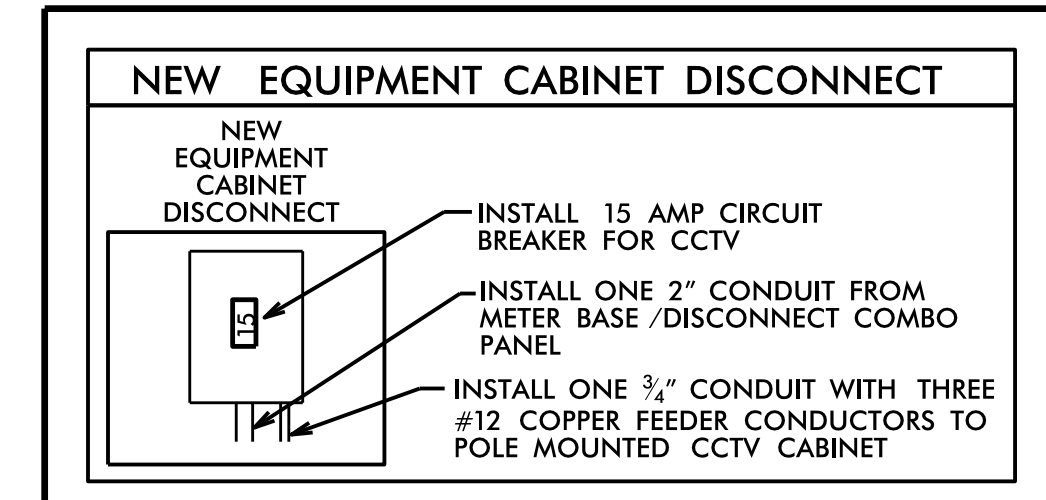

**DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED**

	<b>ITS DEVICE REPLACEMENT</b>		
	DIVISION 05 WAKE CO. PLAN DATE: NOVEMBER 2021 REVIEWED BY: A. J. SKUCE, PE PREPARED BY: J. WALDEN REVIEWED BY:		
750 N. Greenfield Pkwy., Garner, NC 27529 SCALE: 0		DocuSigned by: Andrew J. Skuce Nov 30, 2021	