

**NOTES**

REPAIR LOCATIONS AND ESTIMATED QUANTITIES ARE BASED ON THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE AS-BUILT REPAIR QUANTITY TABLE.

PAYMENT FOR CLASS II SURFACE PREPARATION IS BASED ON THE SQUARE YARD OF ADDITIONAL DEMOLITION REQUIRED FOLLOWING HYDRO-DEMOLITION OF THE BRIDGE DECK. SEE SPECIAL PROVISIONS.

FOR SECTION A-A, SEE FOAM JOINT DETAILS SHEET.

FOR LMC-ES OVERLAY, SEE SPECIAL PROVISIONS.


FOR BRIDGE JOINT DEMOLITION, SEE SPECIAL PROVISIONS.

FOR BRIDGE JOINT DEMOLITION QUANTITIES, SEE FOAM JOINT DETAIL SHEET.

- CLASS II SURFACE PREPARATION
- BRIDGE JOINT DEMOLITION

PROJECT NO. I-5831A  
MADISON COUNTY  
 BRIDGE NO. 560548

SHEET 2 OF 2

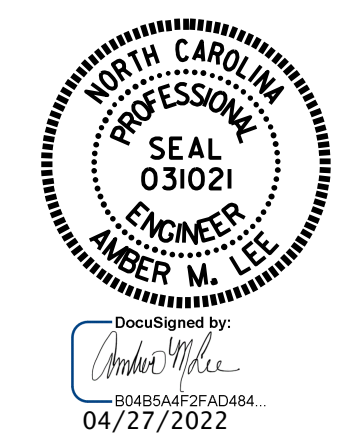

STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH

DECK SURFACE REPAIR  
 SPANS A, B & C

AS-BUILT REPAIR QUANTITY TABLE								
DECK SURFACE REPAIRS - SPAN A			DECK SURFACE REPAIRS - SPAN B			DECK SURFACE REPAIRS - SPAN C		
	ESTIMATE	ACTUAL		ESTIMATE	ACTUAL		ESTIMATE	ACTUAL
CLASS II SURFACE PREPARATION	0.0 SQ. YDS.		CLASS II SURFACE PREPARATION	0.0 SQ. YDS.		CLASS II SURFACE PREPARATION	0.0 SQ. YDS.	
LATEX MODIFIED CONCRETE OVERLAY - EARLY STRENGTH	24.7 CU. YDS.		LATEX MODIFIED CONCRETE OVERLAY - EARLY STRENGTH	66.6 CU. YDS.		LATEX MODIFIED CONCRETE OVERLAY - EARLY STRENGTH	19.8 CU. YDS.	
PLACING AND FINISHING LMC OVERLAY	390.0 SQ. YDS.		PLACING AND FINISHING LMC OVERLAY	1066.8 SQ. YDS.		PLACING AND FINISHING LMC OVERLAY	316.9 SQ. YDS.	
SCARIFYING BRIDGE DECK	390.0 SQ. YDS.		SCARIFYING BRIDGE DECK	1066.8 SQ. YDS.		SCARIFYING BRIDGE DECK	316.9 SQ. YDS.	
HYDRO-DEMOLITION OF BRIDGE DECK	390.0 SQ. YDS.		HYDRO-DEMOLITION OF BRIDGE DECK	1066.8 SQ. YDS.		HYDRO-DEMOLITION OF BRIDGE DECK	316.9 SQ. YDS.	
GROOVING BRIDGE FLOORS	3329.5 SQ. FT.		GROOVING BRIDGE FLOORS	9042.2 SQ. FT.		GROOVING BRIDGE FLOORS	2652.8 SQ. FT.	

△ UPDATED QUANTITIES, 4/27/2022

DRAWN BY : CL BRIGHT DATE : 06/2019  
 CHECKED BY : J. A. TILLMAN DATE : 02/2022

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S4-05
1			3			TOTAL SHEETS
2			4			6

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED