


**NOTES**  
 GENERAL DRAWING INFORMATION IS TAKEN FROM THE ORIGINAL PLANS AND THE ROUTINE INSPECTION REPORT DATED 08/05/2020.  
 BRIDGE ORIENTATION CONFORMS TO THE ORIGINAL BRIDGE PLANS.

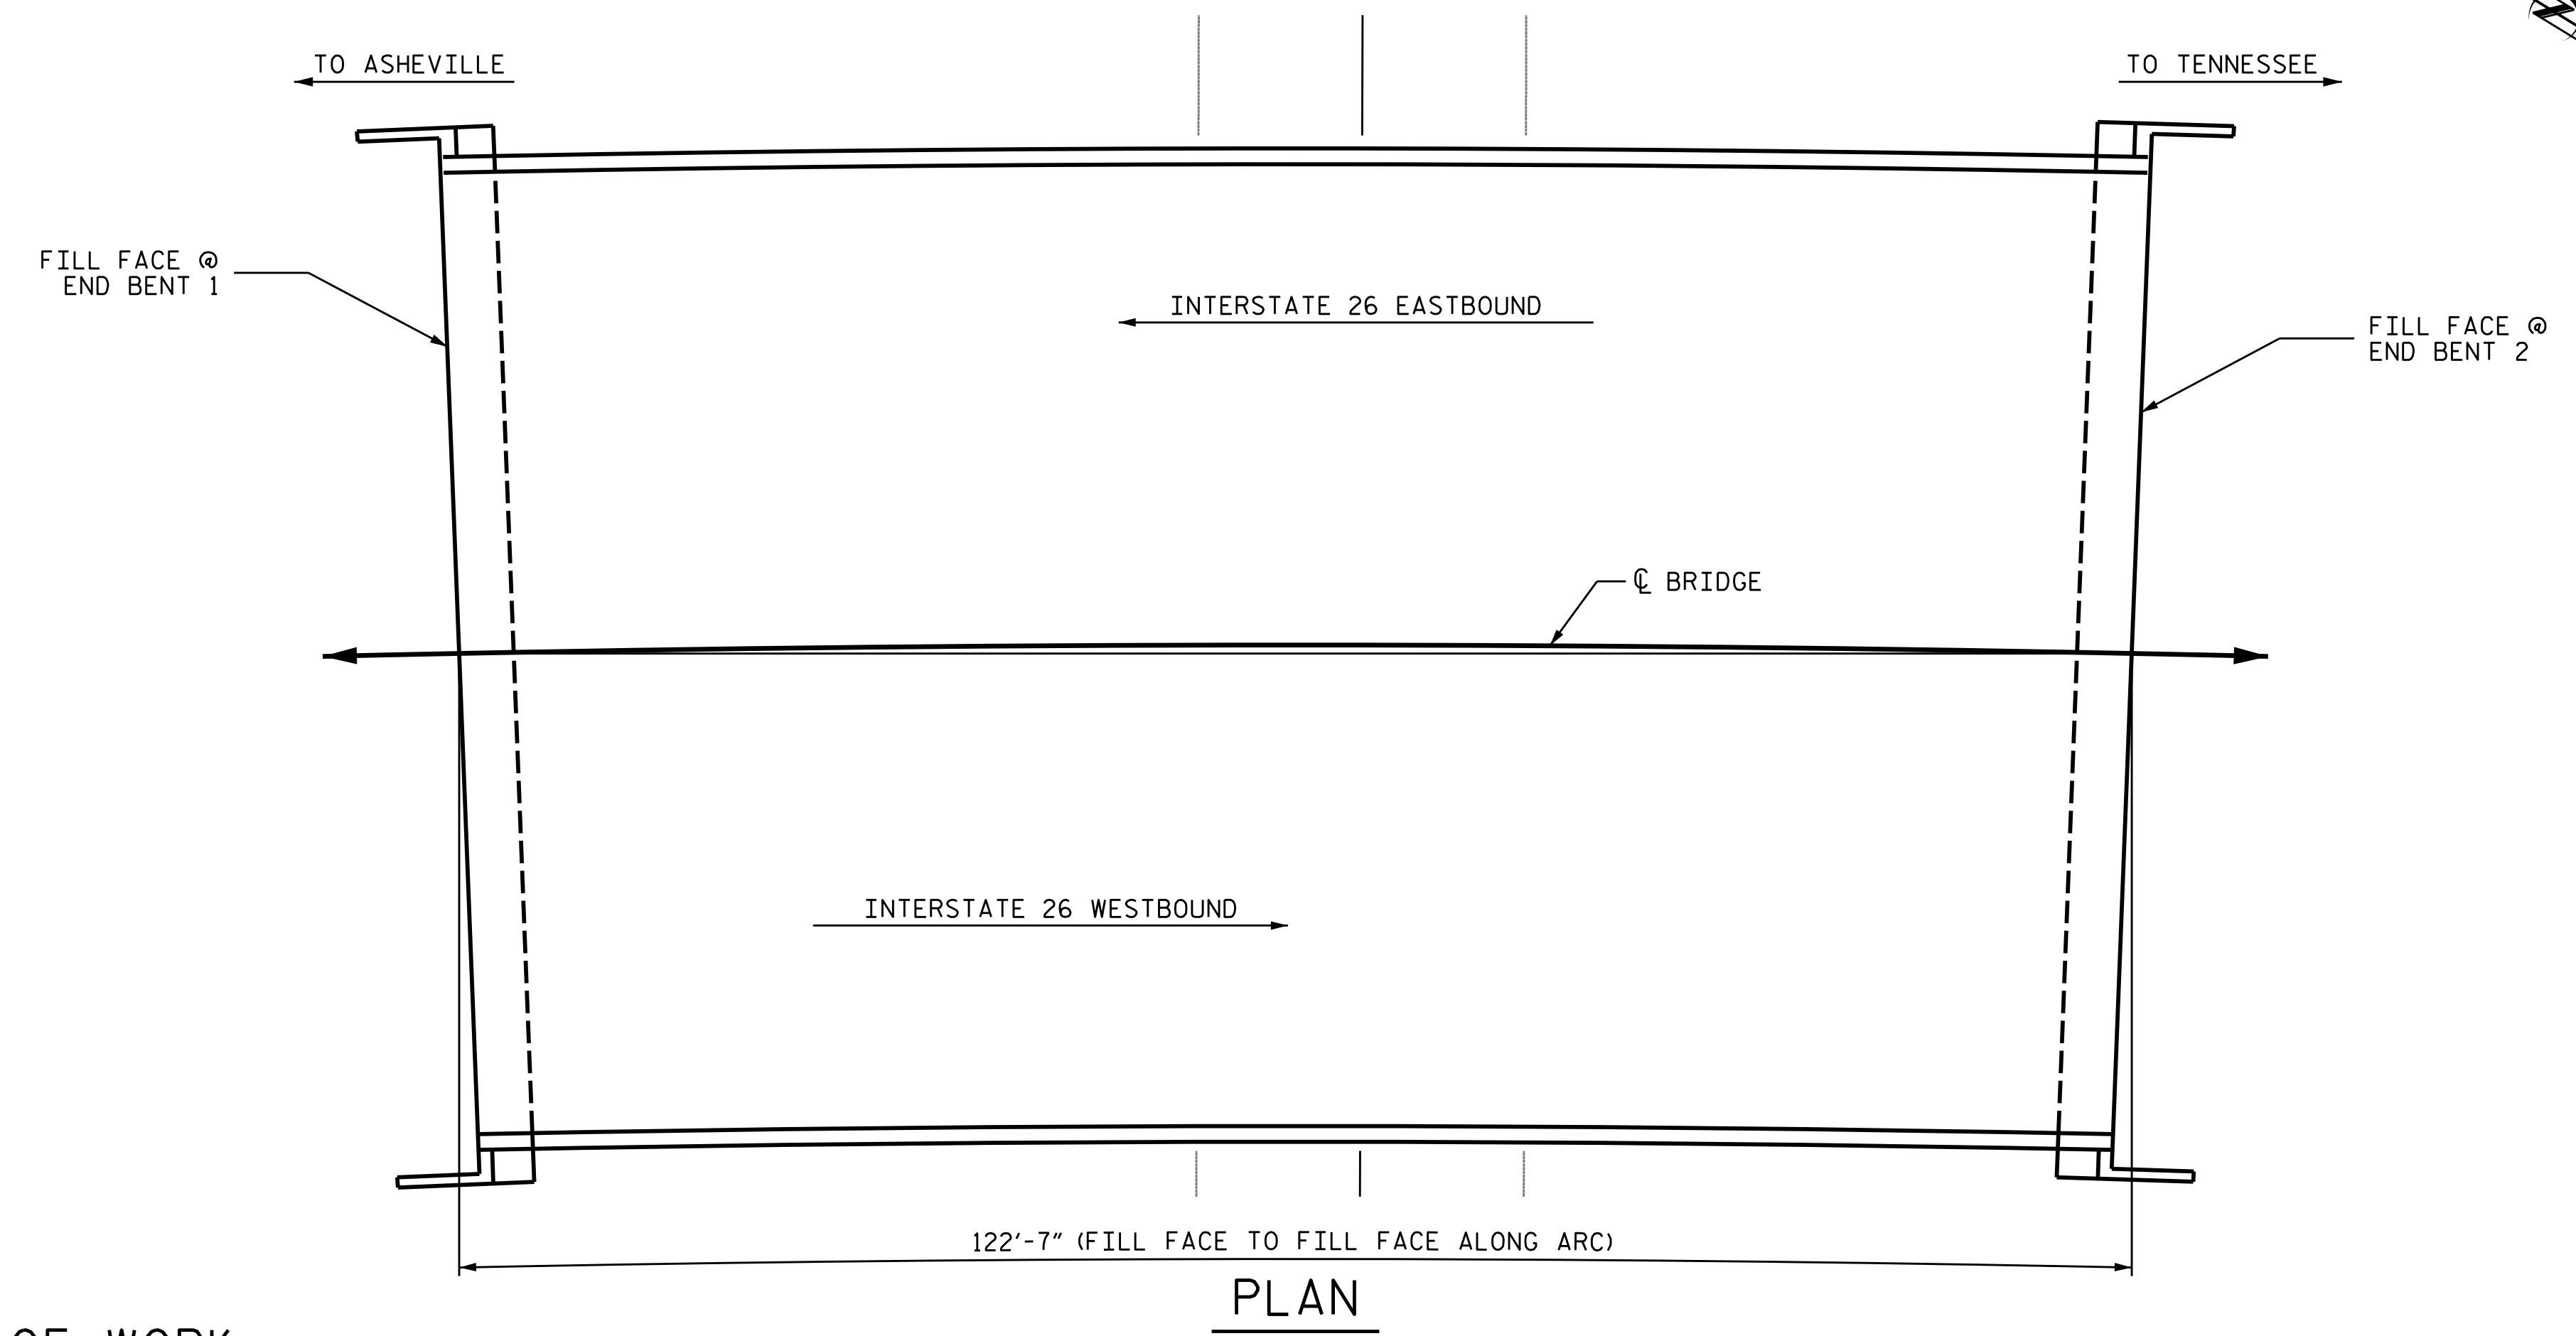


I HEREBY CERTIFY THAT THIS STRUCTURE WAS REHABILITATED ACCORDING TO THESE PLANS OR AS NOTED HEREIN.  
 \_\_\_\_\_  
 RESIDENT ENGINEER DATE

**SCOPE OF WORK**

- PARTIALLY REMOVE BRIDGE DECK CONCRETE BY SCARIFICATION AND HYDRO-DEMOLITION METHOD.
- OVERLAY PREPARED TOP OF BRIDGE DECK WITH LATEX MODIFIED CONCRETE - EARLY STRENGTH (LMC-ES)
- REMOVE EXISTING JOINT MATERIALS AND INSTALL FOAM JOINTS.
- GROOVE LMC-ES BRIDGE DECK.
- CLEAN, AND PAINT WEATHERING STEEL BEAM ENDS.
- REMOVE DEBRIS FROM TOP OF END BENT CAPS, AND APPLY EPOXY COATING.
- EPOXY RESIN INJECTION OF CONCRETE CRACKS.
- REMOVE UNSOUND CONCRETE AND PROPERLY PREPARE EXISTING END BENT AREAS FOR SHOTCRETE AND CONCRETE REPAIRS.
- PREFORM SHOTCRETE AND CONCRETE REPAIRS.
- REMOVE UNSOUND CONCRETE AND REBUILD EXISTING APPROACH SLAB CURB.

DRAWN BY : M.ALINAGHIAN DATE : .06/2019  
 CHECKED BY : H.A. LOCKLEAR DATE : .02/2022

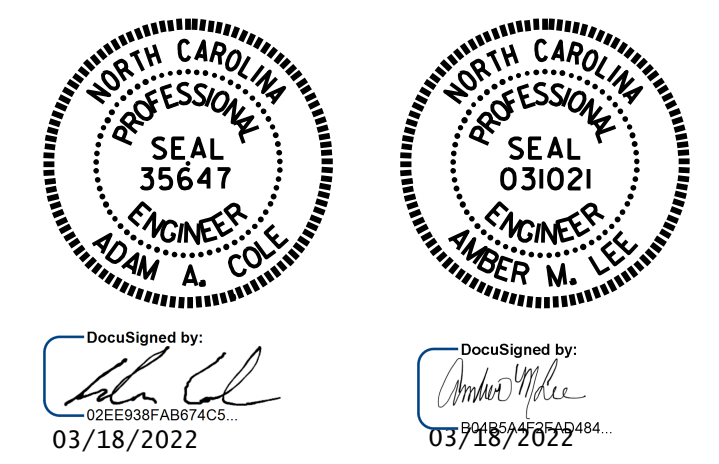

PROJECT NO. I-5831A  
 MADISON COUNTY  
 BRIDGE NO. 560551

STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH  
**GENERAL DRAWING**  
 FOR BRIDGE ON  
 INTERSTATE 26  
 OVER SR 1346  
 (BEAR BRANCH ROAD)

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	ST-01
1			3			TOTAL SHEETS
2			4			8

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED