


**ELEVATION**  
(SECTION ALONG  $\bar{C}$  ROADWAY)

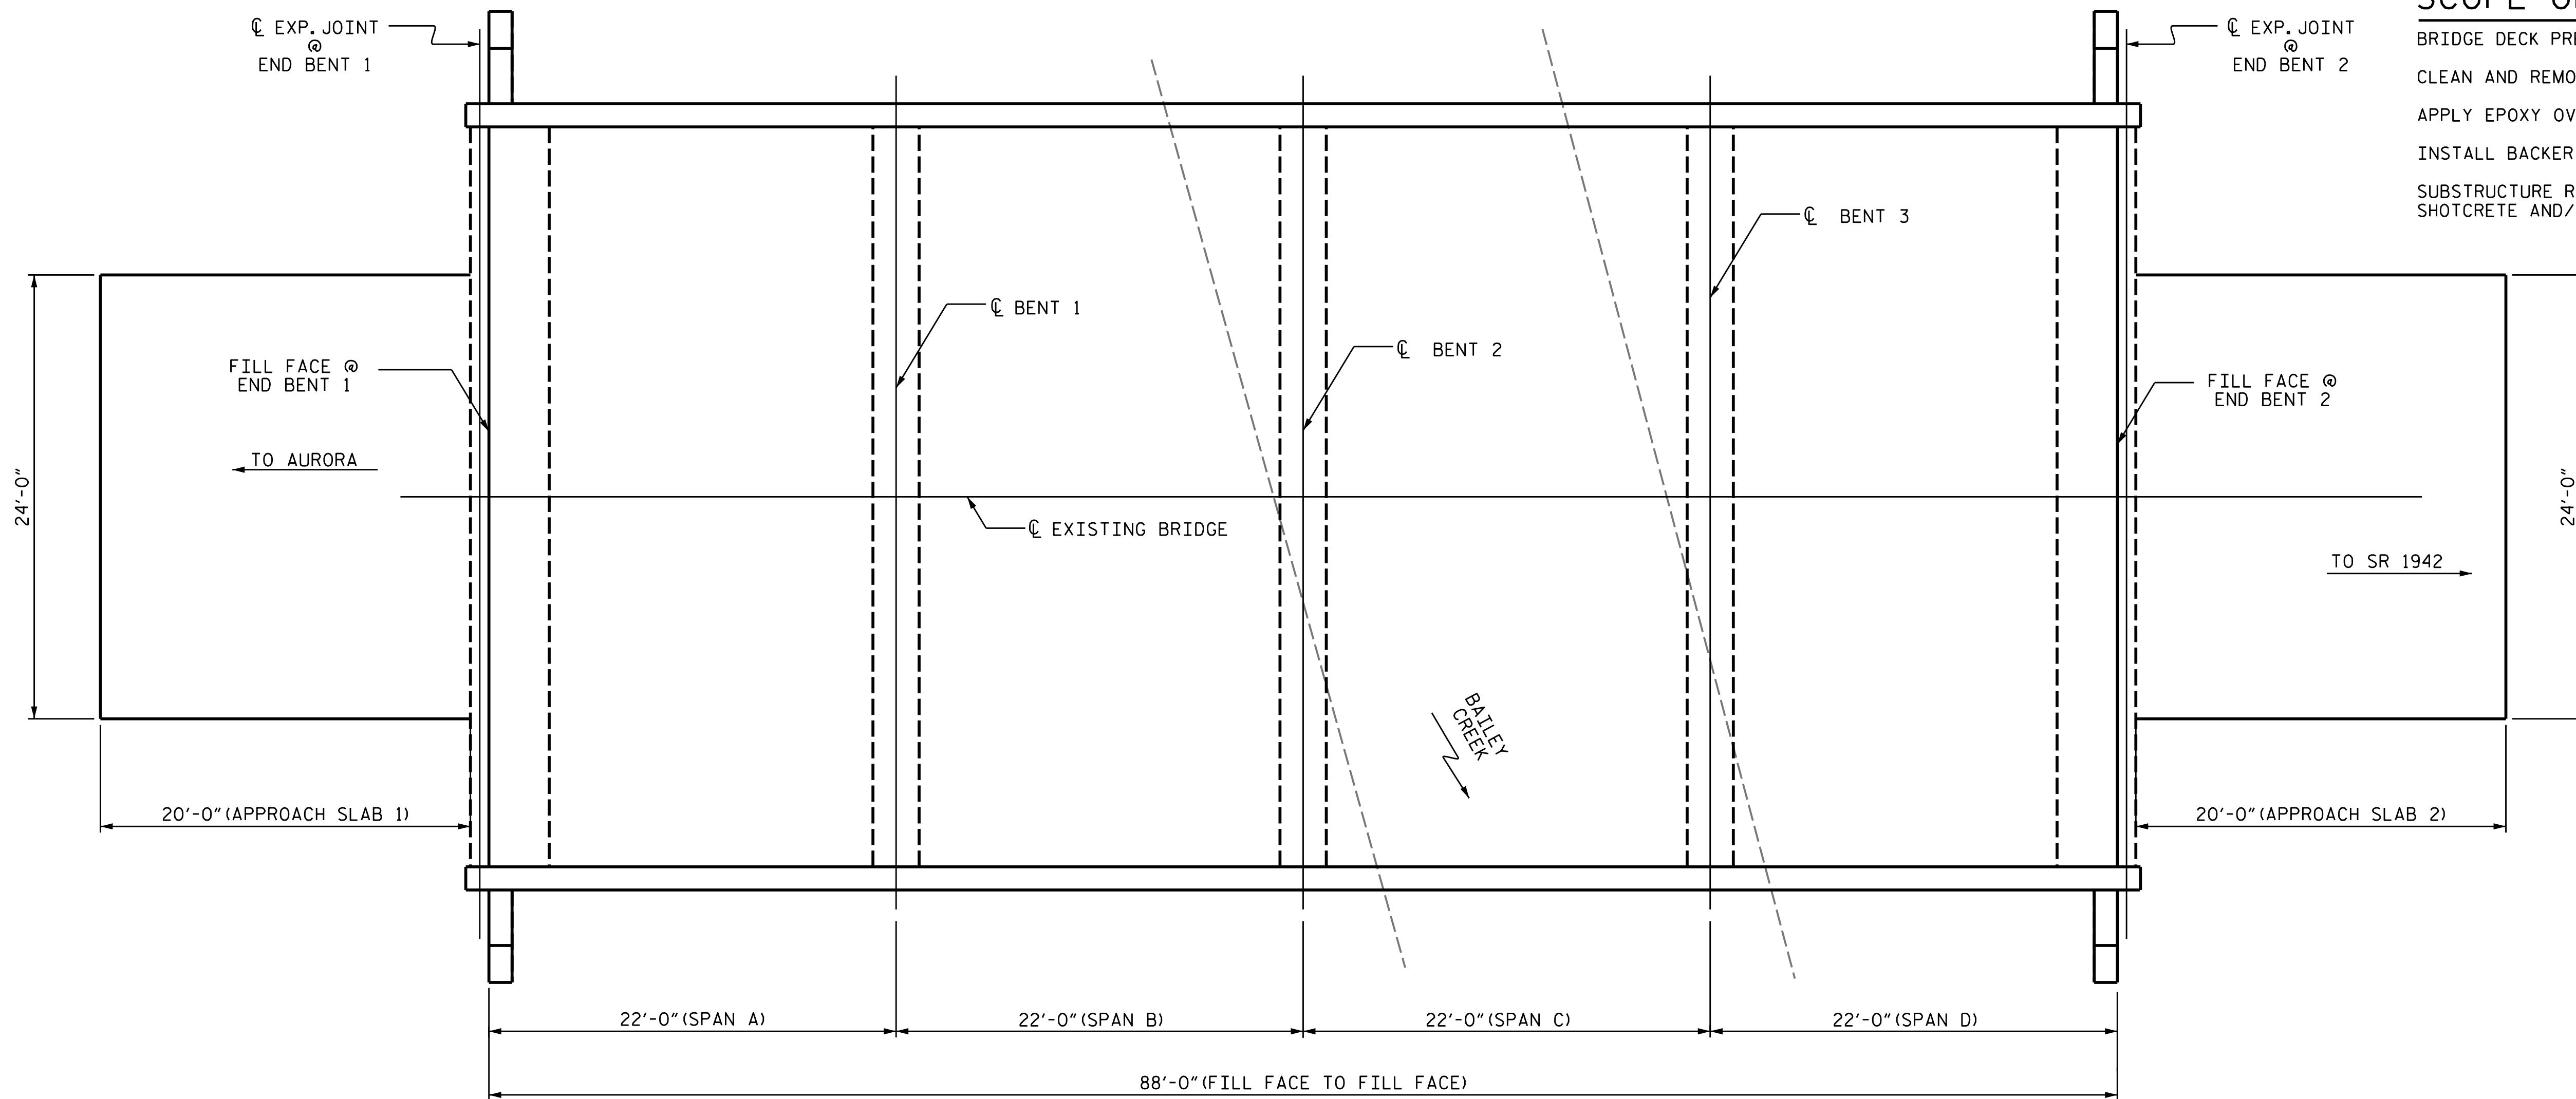

**PLAN**  
(PILES NOT SHOWN FOR CLARITY)

**NOTES**

GENERAL DRAWING INFORMATION IS TAKEN FROM THE ORIGINAL PLANS AND THE ROUTINE INSPECTION REPORT DATED 08/11/2020.  
BRIDGE ORIENTATION CONFORMS TO THE ORIGINAL BRIDGE PLANS.  
AT THE TIME OF PREPARATION OF THESE PLANS, IT WAS NOT ANTICIPATED THAT ITEMS SHOWN BELOW WOULD BE REQUIRED. HOWEVER, IT MAY BE NECESSARY TO PROPERLY COMPLETE THE INTENDED BRIDGE PRESERVATION/REHABILITATION WORK. THE CONTRACTOR SHALL BE PREPARED TO PERFORM SUCH WORK IN A TIMELY MANNER, AS DETERMINED IN THE FIELD. SUCH WORK SHALL BE CONSIDERED EXTRA WORK AND SHALL BE ADDRESSED AS PER ARTICLE 104-7 OF THE STANDARD SPECIFICATIONS. PROJECT SPECIAL PROVISIONS THAT OUTLINE REQUIREMENTS FOR THESE POTENTIAL ADDITIONAL WORK ITEMS HAVE BEEN PROVIDED IN PROJECT DOCUMENTS, BUT NO QUANTITIES HAVE BEEN LISTED. ACTUAL PAY ITEMS, QUANTITIES, AND COSTS WILL BE ESTABLISHED, AS REQUIRED, IF EXTRA WORK IS ENCOUNTERED.


UNANTICIPATED ITEMS:

ITEM NO.	DESCRIPTION	UNIT
1	CONCRETE DECK REPAIR FOR EPOXY OVERLAY.	SQ. FT.
2	CONCRETE REPAIRS	CU. FT.

**SCOPE OF WORK**

- BRIDGE DECK PREPARATION WITH SHOTBLASTING METHODS.
- CLEAN AND REMOVE EXISTING JOINT MATERIAL.
- APPLY EPOXY OVERLAY.
- INSTALL BACKER ROD AND SILICONE JOINT SEALANT.
- SUBSTRUCTURE REPAIRS USING EPOXY RESIN INJECTION, SHOTCRETE AND/OR CONCRETE REPAIRS.

PROJECT NO. 15BPR.56  
BEAUFORT COUNTY  
BRIDGE NO. 060016

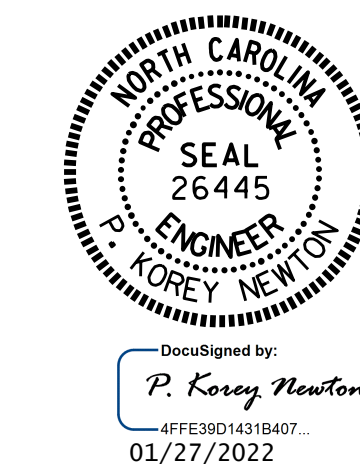

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH  
**GENERAL DRAWING**  
FOR BRIDGE ON  
SR 1940 OVER BAILEY CREEK  
BETWEEN AURORA AND SR 1942

I HEREBY CERTIFY THAT THIS STRUCTURE WAS REHABILITATED ACCORDING TO THESE PLANS OR AS NOTED HEREIN.  
RESIDENT ENGINEER \_\_\_\_\_ DATE \_\_\_\_\_

DRAWN BY : S. T. SANDOR DATE : 09/2020  
CHECKED BY : W. C. SMITH DATE : 07/2021

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S1-1
1			3			TOTAL SHEETS
2			4			8

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED