



STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION

ROY COOPER  
GOVERNOR

J. ERIC BOYETTE  
SECRETARY

June 15, 2022

**Addendum No. 2**

RE: Contract # C204719

WBS # 45919.3.3

FEDERAL-AID NO. 0040102

**Iredell and Catawba Counties (I-5915B)**

I-40 FROM EAST OF SR-1007 (1ST ST WEST) TO EAST OF NC-115

**June 21, 2022 Letting**

To Whom It May Concern:

Reference is made to the plans furnished to you on this project.

The following revisions have been made to the Structure Plans.

Sheet No.	Revision
S2	Note 2 removed

Please void the above listed Sheet in your plans and staple the revised Sheet thereto.

The contract will be prepared accordingly.

Sincerely,

DocuSigned by:  
  
 F81B6038A47A442...

Ronald E. Davenport, Jr., PE  
State Contract Officer

RED/jjr  
Attachments

cc: Mr. Lamar Sylvester, PE  
Mr. Mark Stafford, PE  
Mr. Boyd Tharrington, PE  
Mr. Jon Weathersbee, PE  
Mr. Ken Kennedy, PE  
Project File (2)

Mr. Forrest Dungan, PE  
Ms. Jaci Kincaid  
Mr. Kyle Kempf  
Ms. Lori Strickland  
Mr. Mike Gwyn  
Ms. Penny Higgins

# STRUCTURES

## TOTAL BILL OF MATERIAL

DESCRIPTION	BORROW EXCAVATION	INCIDENTAL MILLING	ASPHALT CONCRETE SURFACE COURSE, TYPES 9, 5C	ASPHALT BINDER FOR PLANT MIX	FLOWABLE FILL	GROOVING BRIDGE FLOORS	POLLUTION CONTROL	CLASS II, SURFACE PREPARATION	CLASS III, SURFACE PREPARATION	CONCRETE REPAIRS	SHOTCRETE REPAIRS	EPOXY RESIN INJECTION	ZONE PAINTING OF EXISTING STRUCTURE	PAINTING CONTAINMENT FOR BRIDGE *	PAINTING CONTAINMENT FOR ZONE PAINTING
BRIDGE NO.	CU. YD.	SQ. YD.	TON	TON	CU. YD.	SQ. FT.	LUMP SUM	SQ. YD.	SQ. YD.	CU. FT.	CU. FT.	LIN. FT.	LUMP SUM	LUMP SUM	LUMP SUM
170171	-	490	41	2.5	-	-	-	0.1	-	2	8.6	135	-	-	-
170172	-	490	41	2.5	-	-	-	-	-	5.9	4.1	104.7	-	-	-
170177	-	1402	261	15.9	-	-	LUMP SUM	39.2	0	41.3	20.8	10.1	-	LUMP SUM	-
170178	-	1377	257	15.6	-	-	LUMP SUM	82.2	0.8	4.5	9.1	31	-	LUMP SUM	-
480006	-	1565	641	39.1	-	-	LUMP SUM	0	0	0.9	19.9	24	LUMP SUM	LUMP SUM	LUMP SUM
480007	-	1529	603	36.8	-	-	LUMP SUM	12.7	0	5.7	36	12.5	LUMP SUM	LUMP SUM	LUMP SUM
480051	4.1	1538	280	17	1.9	-	LUMP SUM	8.6	5.8	25.2	17.5	9.5	LUMP SUM	LUMP SUM	LUMP SUM
480054	2.4	1498	274	16.6	1.1	-	LUMP SUM	3.1	4.5	7.1	43.8	9	LUMP SUM	LUMP SUM	LUMP SUM
480065	8.5	1545	284	17.2	4.9	-	LUMP SUM	1.7	3	2.2	9.6	10.3	LUMP SUM	LUMP SUM	LUMP SUM
480066	8.5	1518	280	16.9	4.5	-	LUMP SUM	0.1	15.1	6.2	42.1	28.5	LUMP SUM	LUMP SUM	LUMP SUM
480072	-	311	26	1.6	-	3360	LUMP SUM	18	38.3	3.4	55.6	21	LUMP SUM	LUMP SUM	LUMP SUM
480073	-	331	28	1.7	-	3360	LUMP SUM	10.7	77.2	21.5	46.7	12	LUMP SUM	LUMP SUM	LUMP SUM
480096	-	314	27	1.6	-	-	LUMP SUM	0	0	0.7	20.5	13	LUMP SUM	LUMP SUM	LUMP SUM
480102	-	318	27	1.6	-	-	LUMP SUM	3.6	12.9	7.6	15.3	0	LUMP SUM	LUMP SUM	LUMP SUM
480104	-	-	-	-	-	-	LUMP SUM	0	0	17.1	32.1	151	-	LUMP SUM	-
480109	-	-	-	-	-	-	LUMP SUM	3.9	0	0	5.5	1	-	LUMP SUM	-
480123	-	-	-	-	-	-	-	0	4.5	21.1	13.6	4.2	-	-	-
480124	-	-	-	-	-	-	-	0	0	26.4	8.8	31	-	-	-
TOTALS	23.5	14226	3070	186.6	12.4	6720	LUMP SUM	183.9	162.1	198.8	409.6	607.8	LUMP SUM	LUMP SUM	LUMP SUM

### NOTES:

- THE ROADWAY PAY ITEMS LISTED HEREIN COINCIDE WITH THE BRIDGE PRESERVATION WORK ONLY. FOR COMPLETE LIST OF ROADWAY PAY ITEMS, NOTES AND PROVISIONS, SEE ROADWAY PLANS.


# STRUCTURES

## TOTAL BILL OF MATERIAL - CONT.

DESCRIPTION	VOLUMETRIC MIXER	UNCLASSIFIED STRUCTURE EXCAVATION AT BRIDGE *	ASPHALT JOINT REPAIR/REPLACEMENT	FOAM JOINT SEALS FOR PRESERVATION	ELASTOMERIC CONCRETE FOR PRESERVATION	BRIDGE JOINT DEMOLITION	HYDRO-DEMOLITION OF BRIDGE DECK	LATEX MODIFIED CONCRETE OVERLAY - VERY EARLY STRENGTH	PLACING AND FINISHING LATEX MODIFIED CONCRETE OVERLAY - VERY EARLY STRENGTH	SCARIFYING BRIDGE DECK	SHOTBLASTING BRIDGE DECK	SILANE DECK TREATMENT	BEARING REPAIRS	CLEANING AND PAINTING EXISTING BEARINGS WITH HRSCA	TYPE I BRIDGE JACKING FOR BRIDGE *
BRIDGE NO.	LUMP SUM	LUMP SUM	LIN. FT.	LIN. FT.	CU. FT.	SQ. FT.	SQ. YD.	CU. YD.	SQ. YD.	SQ. YD.	SQ. YD.	SQ. YD.	EA	EA	EA
170171	LUMP SUM	-	-	-	-	-	-	-	-	-	-	-	-	-	2
170172	LUMP SUM	-	-	-	-	-	-	-	-	-	-	-	-	-	3
170177	LUMP SUM	-	156.4	-	-	-	-	-	-	-	560	560	-	24	-
170178	LUMP SUM	-	156.4	-	-	-	-	-	-	-	-	-	-	24	-
480006	LUMP SUM	-	101.5	101.5	-	-	-	-	-	-	2841	2841	1	20	1
480007	LUMP SUM	-	101.5	101.5	-	-	-	-	-	-	2834	2834	7	20	7
480051	LUMP SUM	LUMP SUM	169.2	-	-	-	-	-	-	560	-	-	-	24	-
480054	LUMP SUM	LUMP SUM	169.2	-	-	-	-	-	-	560	-	-	-	24	-
480065	LUMP SUM	LUMP SUM	188.7	-	-	-	-	-	-	576	-	-	-	24	-
480066	LUMP SUM	LUMP SUM	188.7	-	-	-	-	-	-	576	-	-	-	24	1
480072	LUMP SUM	-	-	128	30.4	121.3	375	21	375	375	-	-	-	16	-
480073	LUMP SUM	-	-	128	30.4	121.3	375	21	375	375	-	-	-	16	-
480096	LUMP SUM	-	-	118	35.2	140	-	-	-	-	-	-	-	16	-
480102	LUMP SUM	-	-	118	32.8	130.7	-	-	-	-	561	561	-	16	-
480104	LUMP SUM	-	-	202	49	194.1	-	-	-	-	-	-	-	24	-
480109	LUMP SUM	-	-	286	70	278.4	-	-	-	-	-	-	-	36	-
480123	LUMP SUM	-	-	184	44.8	177.6	-	-	-	-	-	-	-	-	4
480124	LUMP SUM	-	-	131	31.2	124.4	-	-	-	-	-	-	-	-	-
TOTALS	LUMP SUM	LUMP SUM	1231.6	1498	323.8	1287.8	750	42	750	3022	6796	6796	8	308	18

BRIDGES: 170171, 170172, 170177, 170178  
480006, 480007, 480051, 480054  
480065, 480066, 480072, 480073  
480096, 480102, 480104, 480109  
480123, 480124

PROJECT NO. I-5915B  
CATAWBA/IREDELL COUNTY  
BRIDGE NO. MULTIPLE

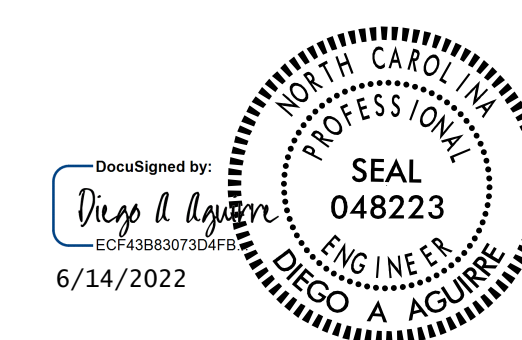

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH

## TOTAL BILL OF MATERIAL

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	TOTAL SHEETS
1			3			9
2			4			

DRAWN BY : DIEGO A. AGUIRRE DATE : 01/2022  
CHECKED BY : JACOB H. DUKE DATE : 01/2022  
DESIGN ENGINEER OF RECORD: DIEGO A. AGUIRRE DATE : 01/2022

6/14/2022  
I5915B\_SMU\_BOM.dgn  
daguirre

DOCUMENT NOT CONSIDERED  
FINAL UNLESS ALL  
SIGNATURES COMPLETED