


REPAIR OF EXISTING PAVEMENT

PAVEMENT SCHEDULE	
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B AT AN AVERAGE RATE OF 165.0 LBS. PER SQ. YD.
V1	INCIDENTAL MILLING

DRAWINGS NOT TO SCALE

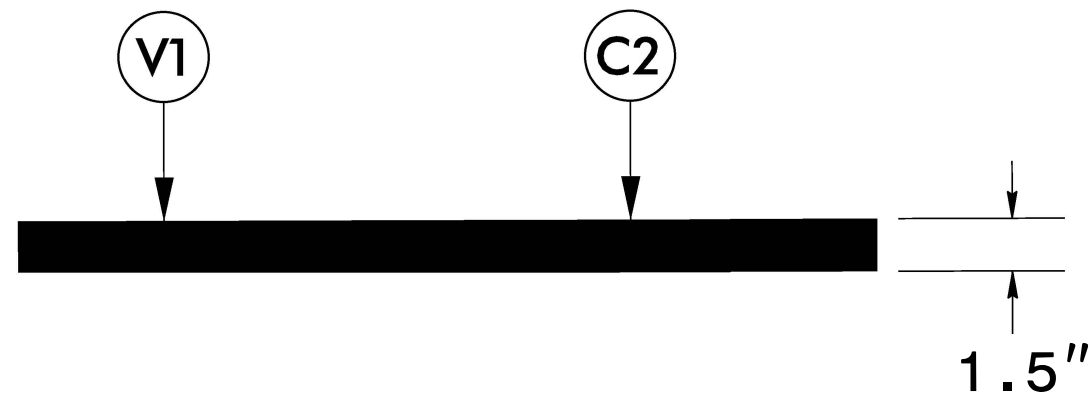

NOTE:

1. THE CONTRACTOR SHALL PERFORM ANY UNIFORM OR INCIDENTAL MILLING AT TIE-INS BEFORE PERFORMING REPAIR OF EXISTING PAVEMENT.
2. THE CONTRACTOR SHALL PERFORM THE PAVEMENT REMOVAL AND REPAIR IN THE SAME DAY.