


NOTES:

- 1) NOTIFY THE CITY OF WILMINGTON SIGNAL SYSTEMS ENGINEER, DENYS VIELKANOWITZ, AT 910-341-4676 FIVE (5) DAYS PRIOR TO BEGINNING WORK ON SIGNAL SYSTEM COMMUNICATIONS CABLE. NOTIFY THE CITY OF WILMINGTON SIGNAL SYSTEMS ENGINEER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. ALL WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND OPERATIONAL.
- 2) RESTORE COMMUNICATIONS WITHIN 24 HOURS IF THE FIBER OPTIC CABLE IS CUT OR NOT COMMUNICATING PROPERLY DURING CONSTRUCTION.
- 3) CONTRACTOR TO RECORD EXISTING SPLICE ARRANGEMENT FOR COMPARISON TO THE SUPPLIED SPLICE DETAILS. IF DISCREPANCIES EXIST, CONTACT THE ENGINEER TO DETERMINE HOW TO PROCEED WITH RESPLICING. PROVIDE AS-BUILT PLANS TO THE ENGINEER IF FINAL SPLICE ARRANGEMENT DIFFERS FROM THE SUPPLIED SPLICE DETAILS.
- 4) CONTRACTOR SHALL ENSURE THAT SYSTEM DOWN TIME IS MINIMIZED DURING SPLICING OF NEW FIBER.
- 5) ALL JUNCTION BOX LIDS TO READ "NCDOT FIBER OPTIC CABLE"

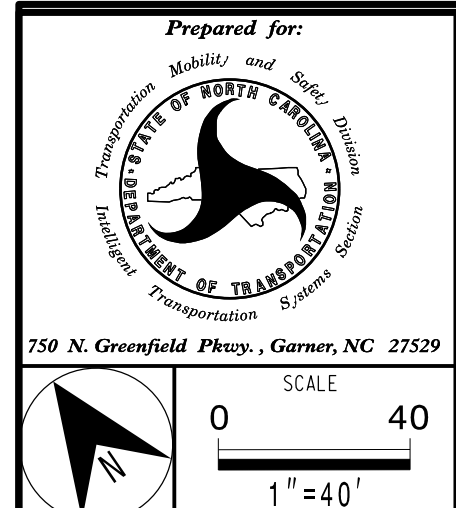

Drysdale Drive Cable Routing Plan	
Division 3	New Hanover County
Wilmington	
PLAN DATE: November 2021	REVIEWED BY: WJ Hamilton
PREPARED BY: A. Andrews	RKA PROJ. No.: 19258 (041)
REVISIONS	INIT. DATE

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	
SEAL	DATE
	11/08/2021
	DATE

