


STAGE 2 - PLAN AT END BENT 1

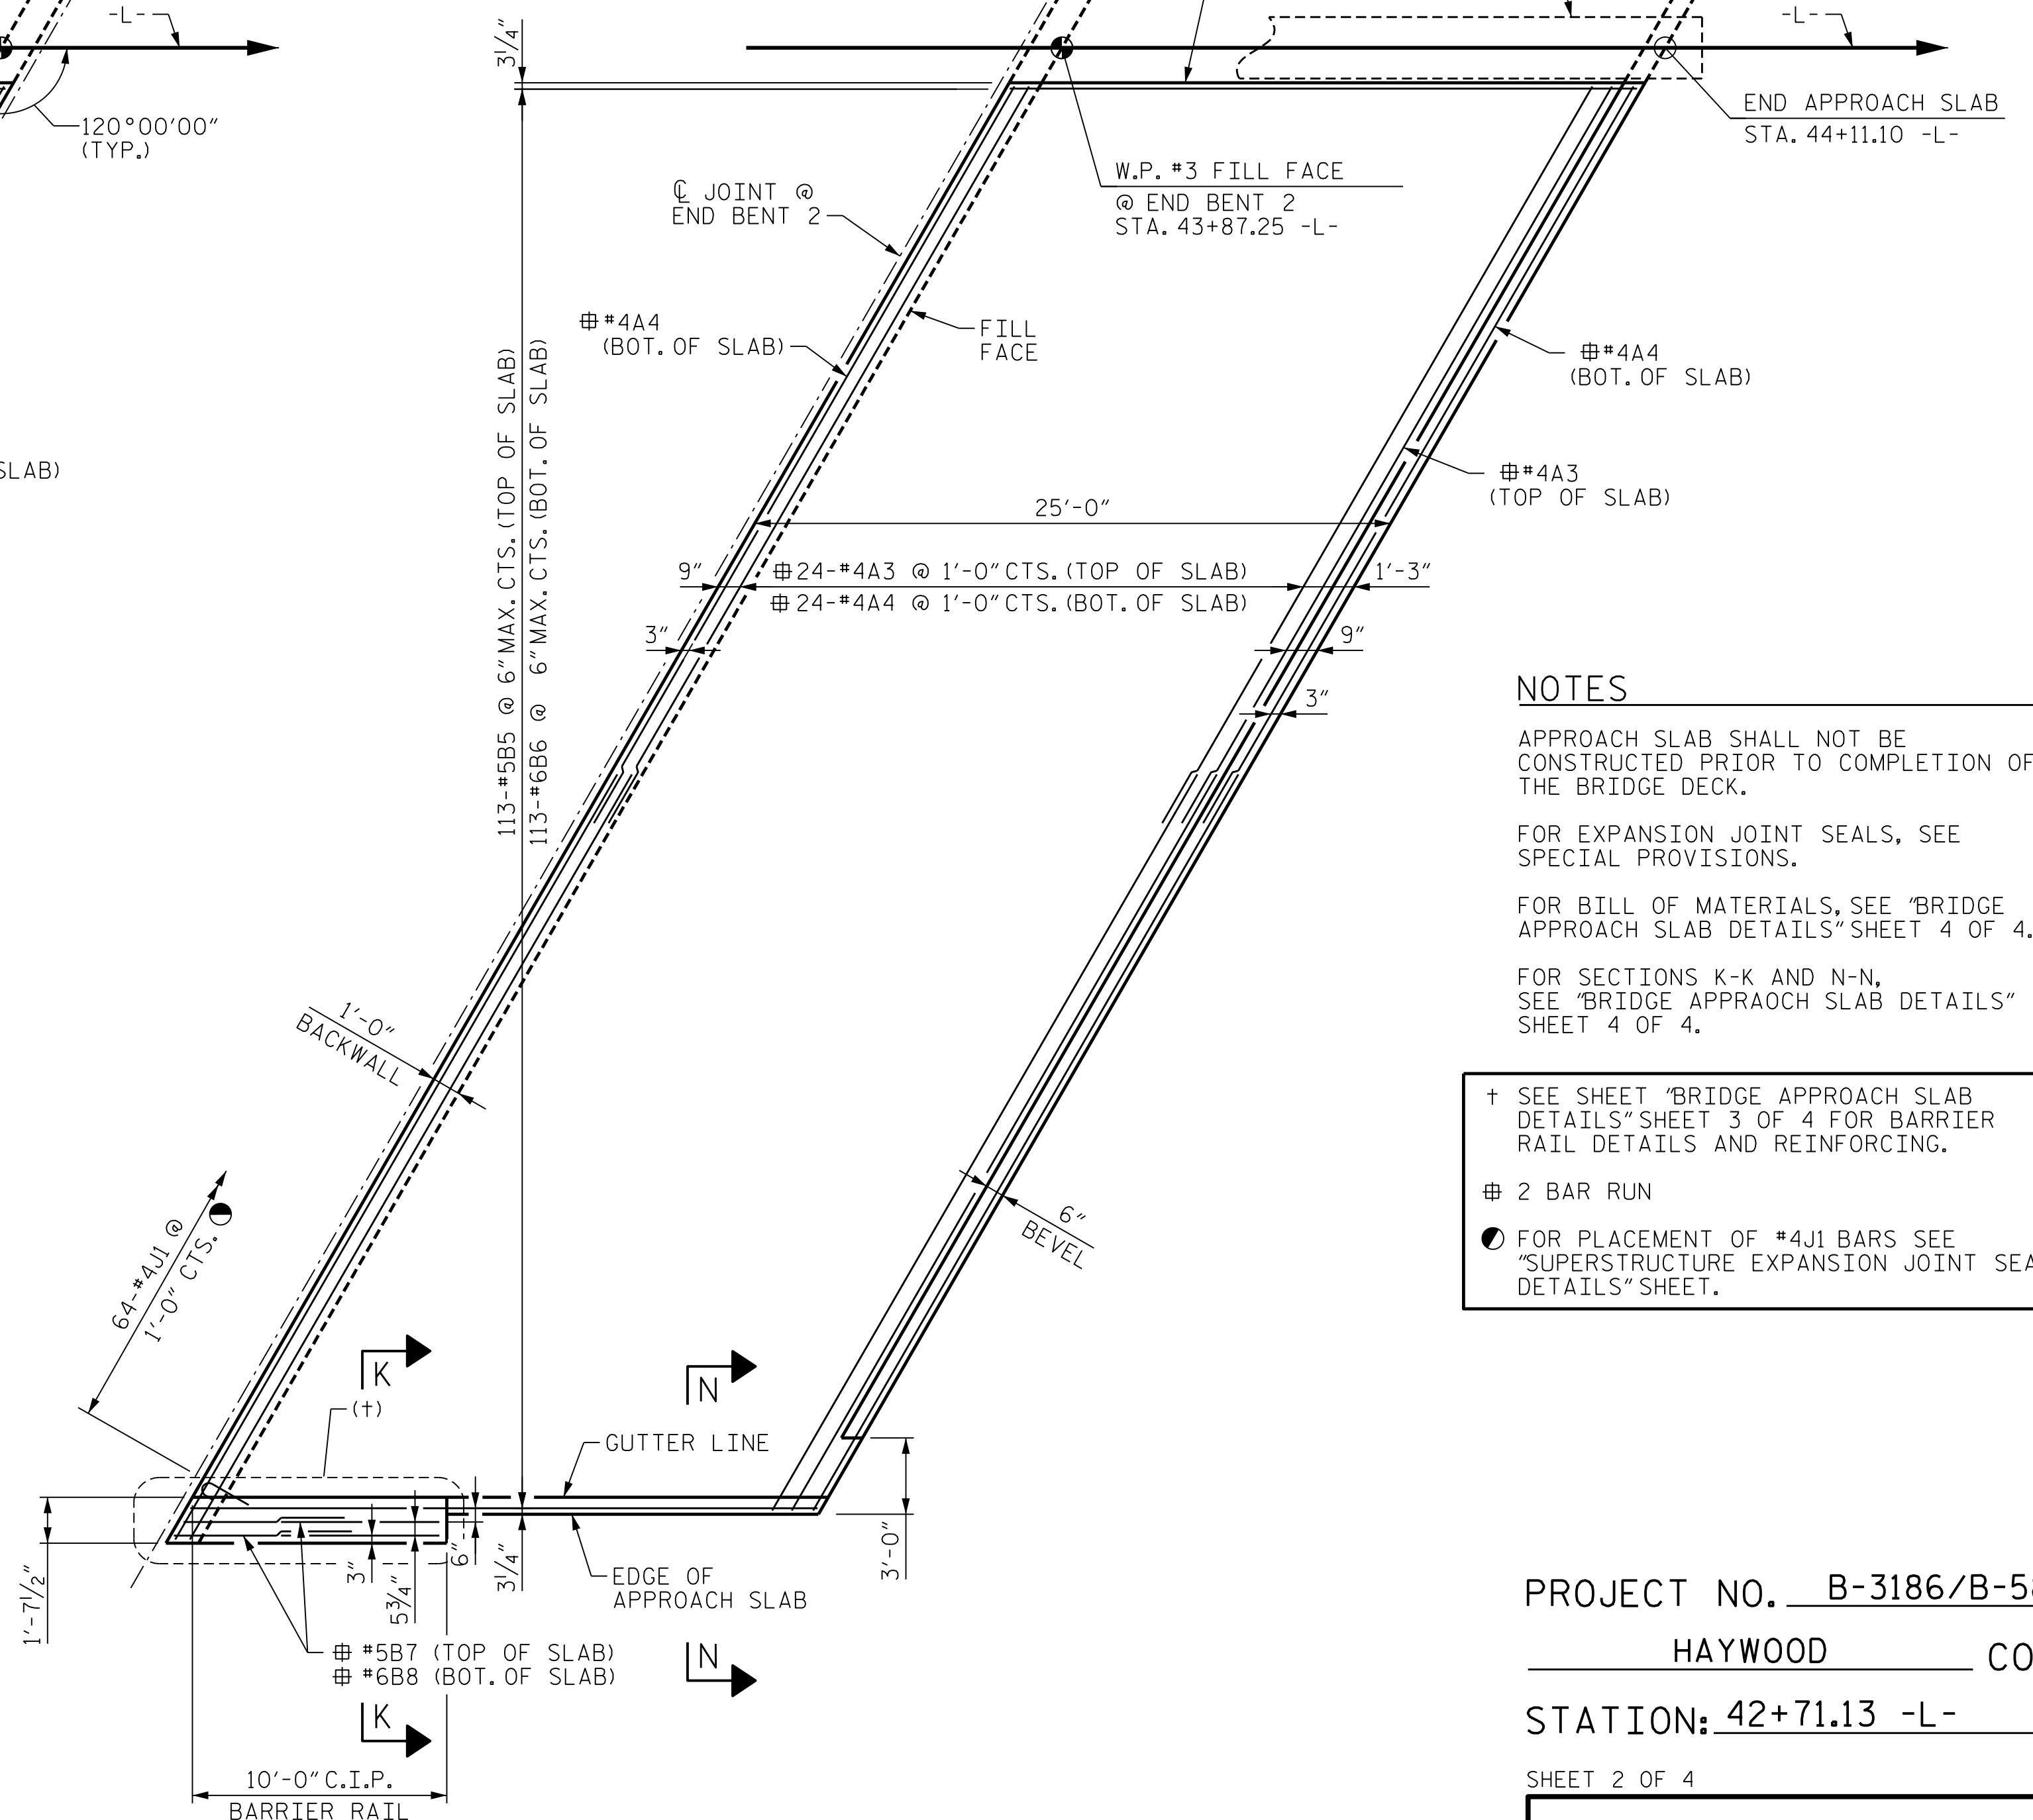

STAGE 2 - PLAN AT END BENT 2

SPLICE LENGTHS		
BAR SIZE	EPOXY COATED	UNCOATED
#4	1'-11"	1'-7"
#5	2'-5"	2'-0"
#6	3'-7"	2'-5"

**NOTES**

APPROACH SLAB SHALL NOT BE CONSTRUCTED PRIOR TO COMPLETION OF THE BRIDGE DECK.

FOR EXPANSION JOINT SEALS, SEE SPECIAL PROVISIONS.

FOR BILL OF MATERIALS, SEE "BRIDGE APPROACH SLAB DETAILS" SHEET 4 OF 4.

FOR SECTIONS K-K AND N-N, SEE "BRIDGE APPROACH SLAB DETAILS" SHEET 4 OF 4.

+ SEE SHEET "BRIDGE APPROACH SLAB DETAILS" SHEET 3 OF 4 FOR BARRIER RAIL DETAILS AND REINFORCING.

# 2 BAR RUN

● FOR PLACEMENT OF #4J1 BARS SEE "SUPERSTRUCTURE EXPANSION JOINT SEAL DETAILS" SHEET.

PROJECT NO. B-3186/B-5898  
HAYWOOD COUNTY  
 STATION: 42+71.13 -L-  
 SHEET 2 OF 4



1/25/2022

STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH

**BRIDGE APPROACH SLAB  
 PLAN AND SECTION  
 STAGE 2**

REVISIONS					
NO.	BY:	DATE:	NO.	BY:	DATE:
1	--	--	3	--	--
2	--	--	4	--	--

SHEET NO. 501-56  
 TOTAL SHEETS 59



DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

PLOT DRIVER: NCDOT STRUCTURES DEFAULT PLOTTER.plt  
 USER: PPETERSO  
 DATE: 1/25/2022  
 TIME: 8:35:03 AM  
 FILE: ... \401.275-B5898B3186-SMU-AS-056-430168.dgn

DES BY: H. ABU NIMEH DATE: 05/21 DWG BY: B. PETERSON DATE: 02/21  
 DES CHK: L. GUALTIERI DATE: 07/21 CHK BY: L. GUALTIERI DATE: 07/21