


PLOT DRIVER: NCDOT\_STRUCTURES\_DEFAULT\_PLOTTER.plt PENTABLE: NCDOT\_STRUCTURES\_DEFAULT\_PEN.tbl  
 USER: PPETERSO DATE: 1/24/2022 TIME: 1:43:13 PM  
 FILE: ... \403.015.B5898B3186.SMU.GD.004.430110.dgn

TOTAL BILL OF MATERIAL												
	REMOVAL OF EXISTING STRUCTURE @ STA. 68+82.30± -L-LT-	4'-6" DIA. DRILLED PIERS IN SOIL	4'-6" DIA. DRILLED PIERS NOT IN SOIL	PDA TESTING	SID INSPECTIONS	CSL TESTING	REINFORCED CONCRETE DECK SLAB	GROOVING BRIDGE FLOORS	CLASS A CONCRETE	BRIDGE APPROACH SLABS @ STA. 68+82.30± -L-LT-	REINFORCING STEEL	
	LUMP SUM	LIN. FT.	LIN. FT.	EA.	EA.	EA.	SQ. FT.	SQ. FT.	CU. YDS.	LUMP SUM	LB.	
SUPERSTRUCTURE							4638	11344		LUMP SUM		
END BENT 1									25.6		4029	
BENT 1		79.0	7.0						33.1		17932	
BENT 2		74.8	7.0						33.9		17662	
END BENT 2									22.1		3516	
TOTAL	LUMP SUM	153.8	14.0	1	1	1	4638	11344	114.7	LUMP SUM	43139	
	SPIRAL COLUMN REINFORCING STEEL	APPROX. 113,000 LBS STRUCTURAL STEEL	PILE DRIVING EQUIPMENT SETUP FOR HP12x53 STEEL PILES	HP12x53 STEEL PILES	STEEL PILE POINTS	CONCRETE BARRIER RAIL	CONCRETE BARRIER RAIL WITH MOMENT SLAB	4" SLOPE PROTECTION	CLASS II SURFACE PREPARATION	LATEX MODIFIED CONCRETE OVERLAY	PLACING AND FINISHING LATEX MODIFIED CONCRETE OVERLAY	
	LB.	LUMP SUM	EA.	NO.	LIN. FT.	EA.	LIN. FT.	LIN. FT.	SQ. YDS.	SQ. YDS.	CU. YDS.	SQ. YDS.
SUPERSTRUCTURE		LUMP SUM					193.8	73.1		12.8	70.3	1355.0
END BENT 1			4	4	240	4			214.6			
BENT 1	3813											
BENT 2	3775											
END BENT 2			4	4	300	4		171.5				
TOTAL	7588	LUMP SUM	8	8	540	8	193.8	73.1	386.1	12.8	70.3	1355.0
	ELASTOMERIC BEARINGS	ELECTRICAL CONDUIT SYSTEM FOR SIGNALS @ STA. 68+82.30± -L-LT-	VOLUMETRIC MIXER	FOAM JOINT SEALS FOR PRESERVATION	ELASTOMERIC CONCRETE FOR PRESERVATION	BRIDGE JOINT DEMOLITION	EPOXY COATING	HYDRO-DEMOLITION OF BRIDGE DECK	SCARIFYING BRIDGE DECK			
	LUMP SUM	LUMP SUM	LUMP SUM	LIN. FT.	CU. FT.	SQ. FT.	SQ. FT.	SQ. YDS.	SQ. YDS.			
SUPERSTRUCTURE	LUMP SUM	LUMP SUM	LUMP SUM	158.2	39.6	158.0		756.2	756.2			
END BENT 1							126.1					
BENT 1							144.3					
BENT 2							144.3					
END BENT 2							127.9					
TOTAL	LUMP SUM	LUMP SUM	LUMP SUM	158.2	39.6	158.0	542.6	756.2	756.2			

PROJECT NO. B-3186/B-5898  
HAYWOOD COUNTY  
 STATION: 68+82.30± -L-LT-

SHEET 4 OF 5

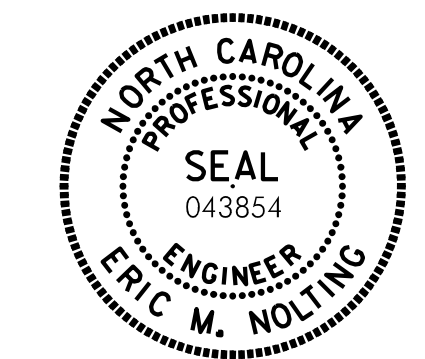


Eric Nolting 1/24/2022

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH

GENERAL DRAWING  
TOTAL BILL  
OF MATERIAL

REVISIONS						SHEET NO.	
NO.	BY:	DATE:	NO.	BY:	DATE:	TOTAL SHEETS	
1	--	--	3	--	--	44	
2	--	--	4	--	--	44	

DES BY: <u>E. NOLTING</u>	DATE: <u>09/21</u>	DWG BY: <u>B. PETERSON</u>	DATE: <u>09/21</u>
DES CHK: <u>G. MYERS</u>	DATE: <u>09/21</u>	CHK BY: <u>G. MYERS</u>	DATE: <u>09/21</u>

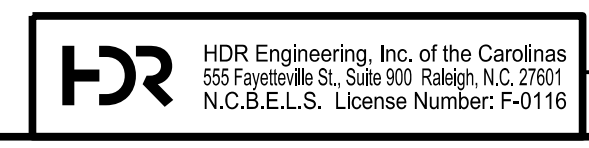

**DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED**