


PLOT DRIVER: NCDOT_STRUCTURES_DEFAULT_PLOTTER.plt
 PENTABLE: NCDOT_STRUCTURES_DEFAULT_PEN.tbl
 USER: PETERSON DATE: 1/24/2022
 TIME: 2:35:47 PM
 FILE: ... \404.015.B5898B3186.SMU.GD.004.430107.dgn

TOTAL BILL OF MATERIAL

	TEMPORARY SHORING	TEMPORARY RAILROAD SHORING FOR BENT NO. 2 @ STA. 68+65.75± -L-RT-	REMOVAL OF EXISTING STRUCTURE @ STA. 68+65.75± -L-RT-	FOUNDATION EXCAVATION FOR BENT @ STA. 68+65.75± -L-RT-	4'-6" DIA. DRILLED PIERS IN SOIL	4'-6" DIA. DRILLED PIERS NOT IN SOIL	PDA TESTING	SID INSPECTIONS	CSL TESTING	REINFORCED CONCRETE DECK SLAB	GROOVING BRIDGE FLOORS	CLASS A CONCRETE	BRIDGE APPROACH SLABS @ STA. 68+65.75± -L-RT-	
	SQ. FT.	LUMP SUM	LUMP SUM	LUMP SUM	LIN. FT.	LIN. FT.	EA.	EA.	EA.	SQ. FT.	SQ. FT.	CU. YDS	LUMP SUM	
SUPERSTRUCTURE										5169	17509		LUMP SUM	
END BENT NO. 1												26.1		
BENT NO. 1	1052			LUMP SUM	83.0	9.0						168.7		
BENT NO. 2	523	LUMP SUM		LUMP SUM	76.9	9.0						134.8		
END BENT NO. 2												26.2		
TOTAL	1575	LUMP SUM	LUMP SUM	LUMP SUM	159.9	18.0	1	1	1	5169	17509	355.8	LUMP SUM	
	REINFORCING STEEL	SPIRAL COLUMN REINFORCING STEEL	APPROX. 122,000 LBS STRUCTURAL STEEL	PILE DRIVING EQUIPMENT SETUP FOR HP12x53 STEEL PILES	HP12x53 STEEL PILES	STEEL PILE POINTS	CONCRETE BARRIER RAIL	CONCRETE BARRIER RAIL WITH MOMENT SLAB	4" SLOPE PROTECTION	CLASS II SURFACE PREPARATION	LATEX MODIFIED CONCRETE OVERLAY	PLACING AND FINISHING LATEX MODIFIED CONCRETE OVERLAY	ELASTOMERIC BEARINGS	
	LB.	LB.	LUMP SUM	EA.	NO.	LIN. FT.	EA.	LIN. FT.	SQ. YDS.	SQ. YDS.	CU. YDS.	SQ. YDS.	LUMP SUM	
SUPERSTRUCTURE			LUMP SUM					188.6	43.7	211.9	10.0	75.1	1461.2	LUMP SUM
END BENT NO. 1	3983			4	4	240	4							
BENT NO. 1	30818	4153												
BENT NO. 2	28489	4108												
END BENT NO. 2	3921			4	4	220	4		225.8					
TOTAL	67211	8261	LUMP SUM	8	8	460	8	188.6	43.7	437.7	10.0	75.1	1461.2	LUMP SUM
	CONCRETE REPAIRS	STRUCTURE DRAINAGE SYSTEM @ STA. 68+65.75± -L-RT-	VOLUMETRIC MIXER	FOAM JOINT SEALS FOR PRESERVATION	POURABLE SILICONE JOINT SEALANT	ELASTOMERIC CONCRETE FOR PRESERVATION	BRIDGE JOINT DEMOLITION	EPOXY COATING	HYDRO-DEMOLITION OF BRIDGE DECK	SCARIFYING BRIDGE DECK				
	CU. FT.	LUMP SUM	LUMP SUM	LIN. FT.	LIN. FT.	CU. FT.	SQ. FT.	SQ. FT.	SQ. YDS.	SQ. YDS.				
SUPERSTRUCTURE		LUMP SUM	LUMP SUM	327.9	146.1	82.0	328.0		1461.2	1461.2				
END BENT NO. 1								143.8						
BENT NO. 1	5.0							159.3						
BENT NO. 2								159.3						
END BENT NO. 2								143.8						
TOTAL	5.0	LUMP SUM	LUMP SUM	327.9	146.1	82.0	328.0	606.2	1461.2	1461.2				

PROJECT NO. B-3186/B-5898
HAYWOOD COUNTY
 STATION: 68+65.75± -L-RT-
 SHEET 4 OF 5

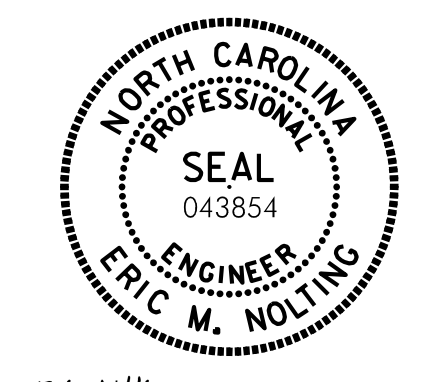


Eric Nolting 1/25/2022

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

GENERAL DRAWING TOTAL BILL OF MATERIAL

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	TOTAL SHEETS
1	--	--	3	--	--	61
2	--	--	4	--	--	

DES BY: E. NOLTING DATE: 09/21 DWG BY: B. PETERSON DATE: 07/21
 DES CHK: G. MYERS DATE: 09/21 CHK BY: G. MYERS DATE: 09/21



DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED