


3/17/2022

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

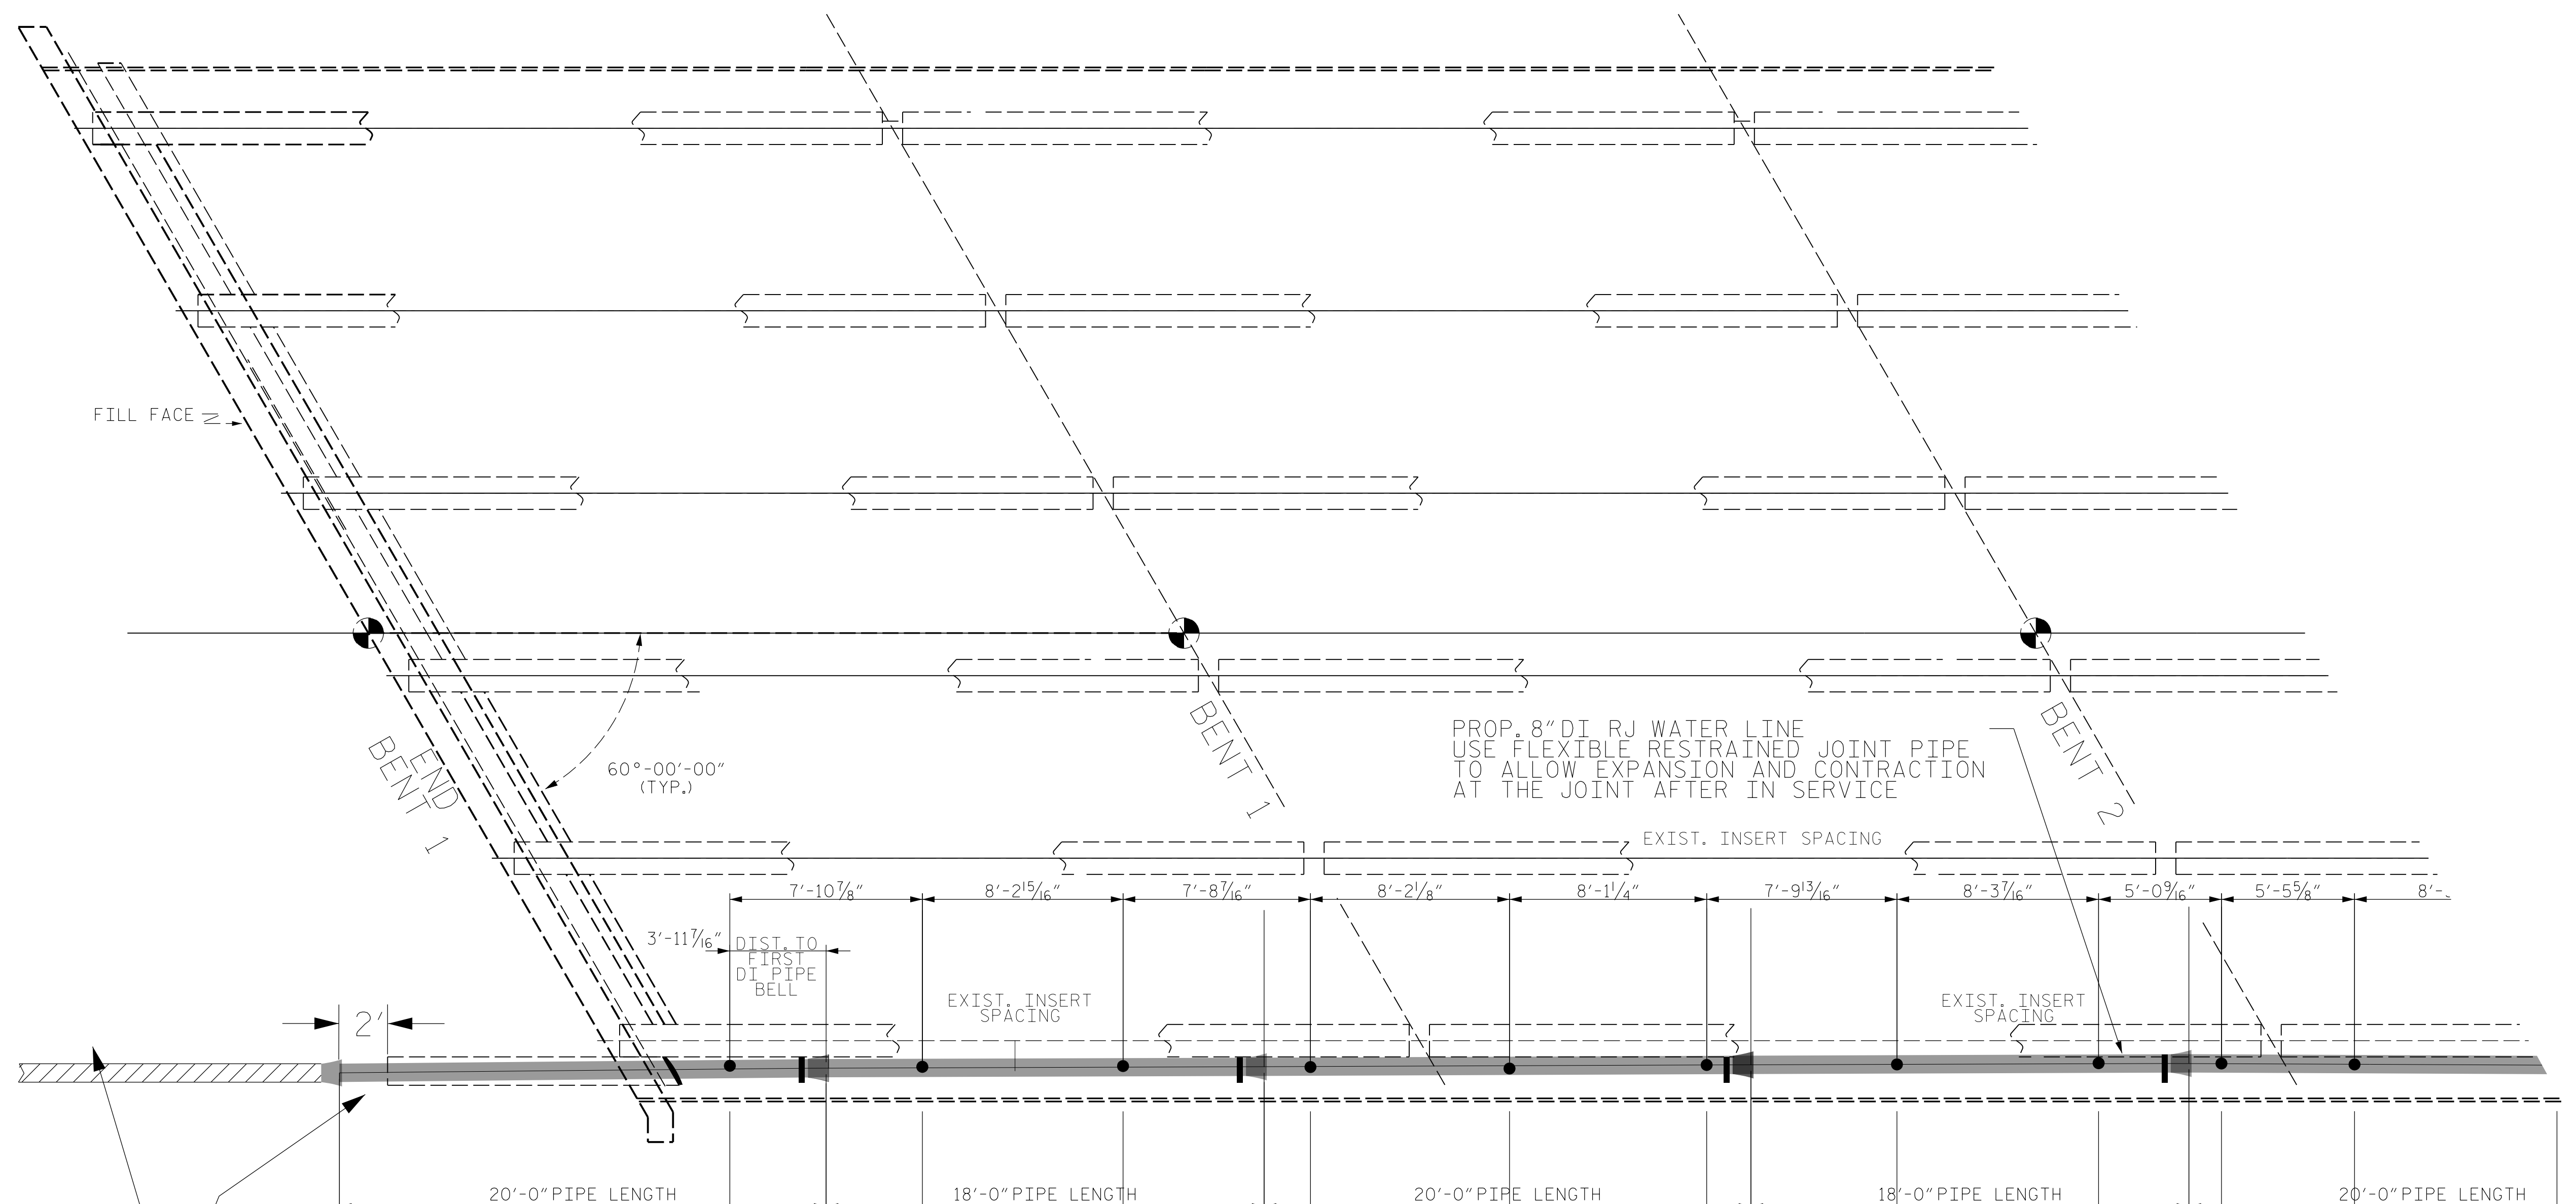

PLACE PROP. 20' SECTION OF 8" RJ DI WATER LINE THRU EXIST. 14" ENCASEMENT.

REMOVE EXIST. 14" ENCASEMENT PIPE 2' BEYOND THE PROP. FIRST SECTION OF 20' - 8" WATER LINE THRU THE EXIST. END BENT. SEE UC PLANS FOR CONTINUATION OF THE 8" WATER LINE.

PLACE PROPOSED 8" RJ DI PIPE THRU EXIST. 14" ENCASEMENT USE CASING SPACERS (2-PER JOINT) TO SUPPORT THE PROP. 8" RJ DI PIPE INSIDE THE ENCASEMENT. GROUT THE SPACE BETWEEN THE 8" PIPE AND CASING AFTER THE PIPE IS INSTALLED.

AFTER THE TEMPORARY 8" WL IS REMOVED CUT THE CASING AND 8" WL FLUSH WITH THE END BENT FACE. USE NON-SHRINKABLE GROUT TO FILL THE 8" DI PIPE AND 14" CASING FLUSH WITH THE END BENT FACE.

PROJECT NO. B-4786
PITT COUNTY
STATION: SB EX. BRIDGE

SHEET OF

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

EXIST. BRIDGE
PLAN OF SPAN
8" WATER LINE
ATTACHMENT

| REVISIONS | | | | | | SHEET NO. | |
|-----------|-----|-------|-----|-----|-------|--------------|--|
| NO. | BY: | DATE: | NO. | BY: | DATE: | SU-4 | |
| 1 | | | 3 | | | TOTAL SHEETS | |
| 2 | | | 4 | | | | |