

T.I.P.: B-4786

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

SIGNING PLAN
PITT COUNTY

LOCATION: REPLACE BRIDGE NO. 38 OVER THE
TAR RIVER ON US 13 IN GREENVILLE

TIP NO. B-4786	SHEET NO. SIGN-1
APPROVED: _____	
DATE: _____	
SEAL	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2018 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
903.10	GROUND MOUNTED SIGN SUPPORTS
903.20	WOOD SIGN POST
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.30	SUPPLEMENTAL SIGN MOUNTING
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS

GENERAL NOTES

- . SIGNS FURNISHED BY CONTRACTOR
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- . ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- . WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- . THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.

SUMMARY OF QUANTITIES


ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4025000000	901	CONTRACTOR FURNISHED, TYPE E SIGN	65	SF
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL	15	LF
4082000000	903	SUPPORTS, WOOD	155	LF
4102000000	904	SIGN ERECTION, TYPE E	8	EA
4116100000	904	SIGN ERECTION, RELOCATE SIGN TYPE D (GROUND MOUNTED)	8	EA
4141000000	907	DISPOSAL OF SUPPORT, WOOD	4	EA
4158000000	907	DISPOSAL OF SIGN SYSTEM, WOOD	6	EA

INDEX

SHEET NO.	DESCRIPTION
SIGN-1	TITLE SHEET
SIGN-2	TYPE E SIGNS
SIGN-3	SIGNING DETAIL
SIGN-4	EXISTING SIGNS

PLAN PREPARED FOR N.C.D.O.T. BY:


	TGS ENGINEERS 706 HILLSBOROUGH ST. SUITE 200 RALEIGH, NC 27603 PH (919) 773-8887 CORP. LICENSE NO. : C-0275	<u>TOMMY REGISTER, PE</u> PROJECT ENGINEER <u>PAUL SCHULKEN, EI</u> DESIGN TECHNICIAN
--	---	--

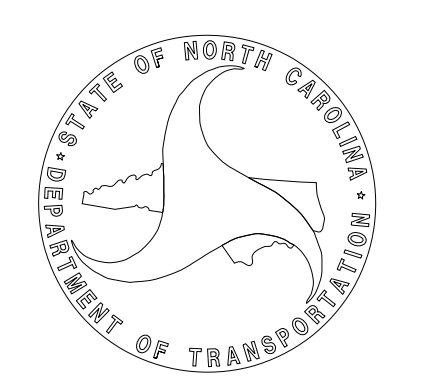

3/22/2019 3:56:00 PM X:\Nc\001\B-4786\Traffic\Signing\CADD\Signing Layout\Plans\B-4786_Sgn_SGN_01(Tsh).dgn User:pschulken

APPROVED: _____


DATE: _____

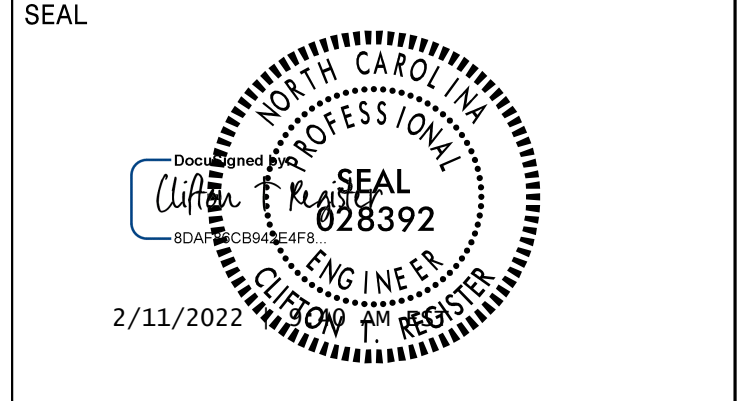

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

TGS ENGINEERS
 706 HILLSBOROUGH ST. SUITE 200
 RALEIGH, NC 27603
 PH (919) 773-8887
 CORP. LICENSE NO.: C-0275


401 QUANTITY REQ'D 2



30 X 36
R2-1

ONE "U" POST PER SIGN


402 QUANTITY REQ'D 2



30 X 36
R2-1

ONE "U" POST PER SIGN


403 QUANTITY REQ'D 1



54 X 18
R6-1

ONE "U" POST PER SIGN


404 QUANTITY REQ'D 1



36 X 36
R5-1

ONE "U" POST PER SIGN


405 QUANTITY REQ'D 1



36 X 36
W11-2

ONE "U" POST PER SIGN

406 QUANTITY REQ'D 1



36 X 36
W8-13


ONE "U" POST PER SIGN

TYPE "E" SIGNS

8/17/99

3/22/2019
X:\Nc\001\B-4786\Traffic\Signing\CADD\Signing_Layout_Plans\B-4786_Sgn_SON_03.dgn
User: pschulken

TIP NO. B-4786	SHEET NO. SIGN-3
APPROVED: _____	
DATE: _____	
SEAL	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	
TGS ENGINEERS 706 HILLSBOROUGH ST., SUITE 200 RALEIGH, NC 27603 PH (919) 773-8887 CORP. LICENSE NO.: C-0275	

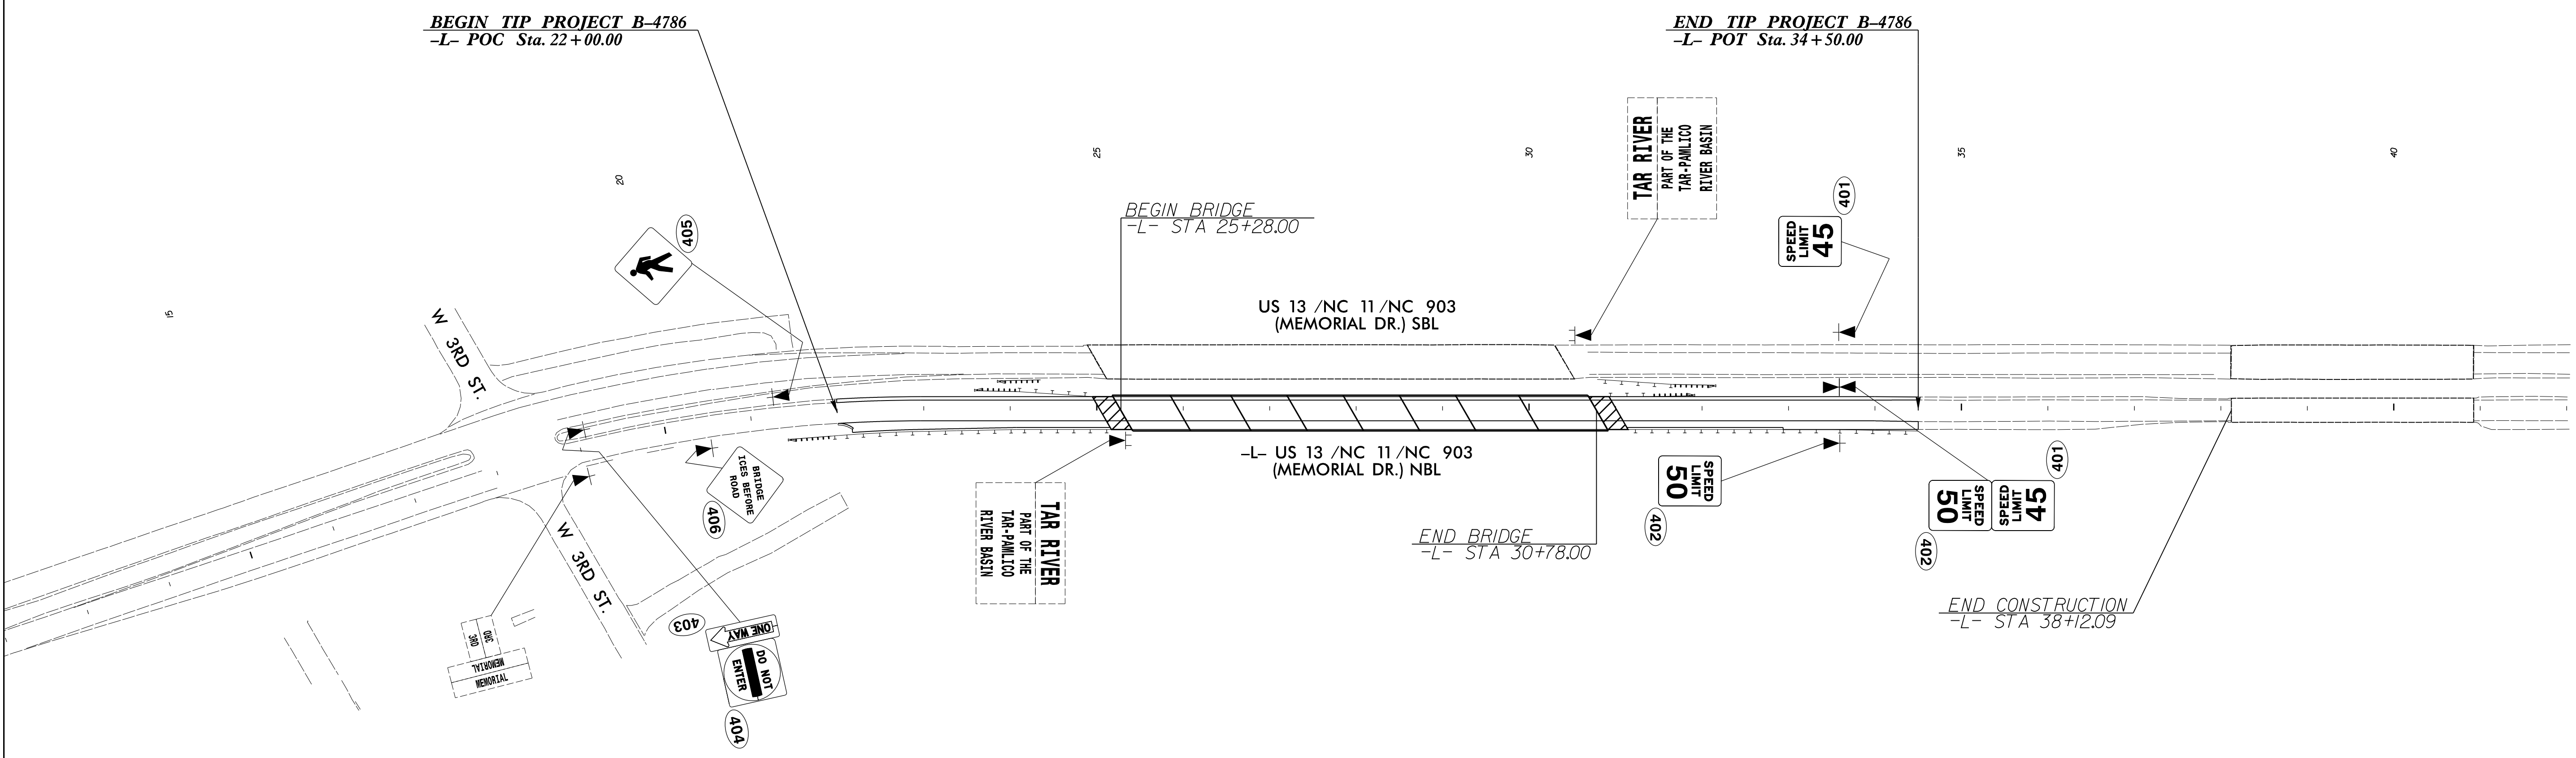

SIGNING DETAIL

8/17/99

3/22/2019
X:\Nc\001\B-4786\Traffic\Signing\CADD\Signing_Layout_Plans\B-4786_Sgn_SON_04.dgn
Jserpschulken

TIP NO. B-4786	SHEET NO. SIGN-4
APPROVED: _____	
DATE: _____	
SEAL	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	
TGS ENGINEERS 706 HILLSBOROUGH ST., SUITE 200 RALEIGH, NC 27603 PH (919) 773-8887 CORP. LICENSE NO.: C-0275	









BEGIN TIP PROJECT B-4786
-L- POC Sta. 22+00.00

END TIP PROJECT B-4786
-L- POT Sta. 34+50.00

BEGIN BRIDGE
-L- STA 25+28.00

END BRIDGE
-L- STA 30+78.00

END CONSTRUCTION
-L- STA 38+12.09

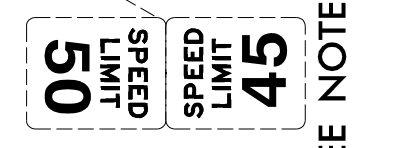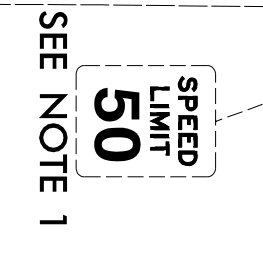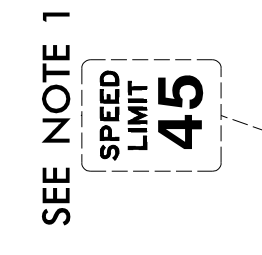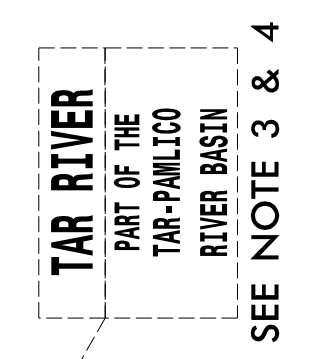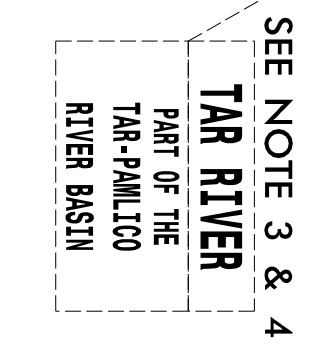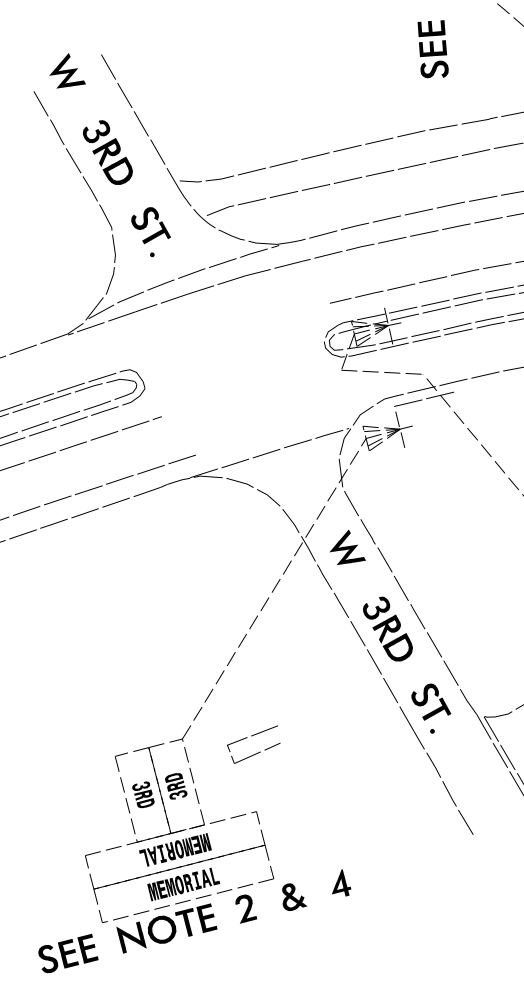

PROJECT NOTES

- 1 DISPOSAL OF SIGN SYSTEM, WOOD
- 2 DISPOSAL OF SUPPORT, U-CHANNEL
- 3 DISPOSAL OF SUPPORT, WOOD
- 4 RELOCATE SIGN ON NEW SUPPORTS

EXISTING SIGNS