


SUMMARY OF QUANTITIES FOR SPAN B

	ESTIMATE	ACTUAL
SCARIFYING BRIDGE DECK	245.0 SY	
HYDRO-DEMOLITION OF BRIDGE DECK	245.0 SY	
CLASS II SURFACE PREPARATION	56.3 SY	
CLASS III SURFACE PREPARATION	0.0 SY	
LATEX MODIFIED CONCRETE OVERLAY	19.2 CY	
PLACING AND FINISHING LATEX MODIFIED CONCRETE OVERLAY	245.0 SY	
GROOVING BRIDGE DECK	1958.6 SF	
BRIDGE JOINT DEMOLITION	38.0 SF	

QUANTITIES FOR LMC OVERLAY ARE BASED ON OVERLAY DEPTH PLUS AN ADDITIONAL 1/4" TO ACCOUNT FOR IRREGULARITIES IN HYDRO-DEMOLITION/SCARIFICATION PROCESSES.

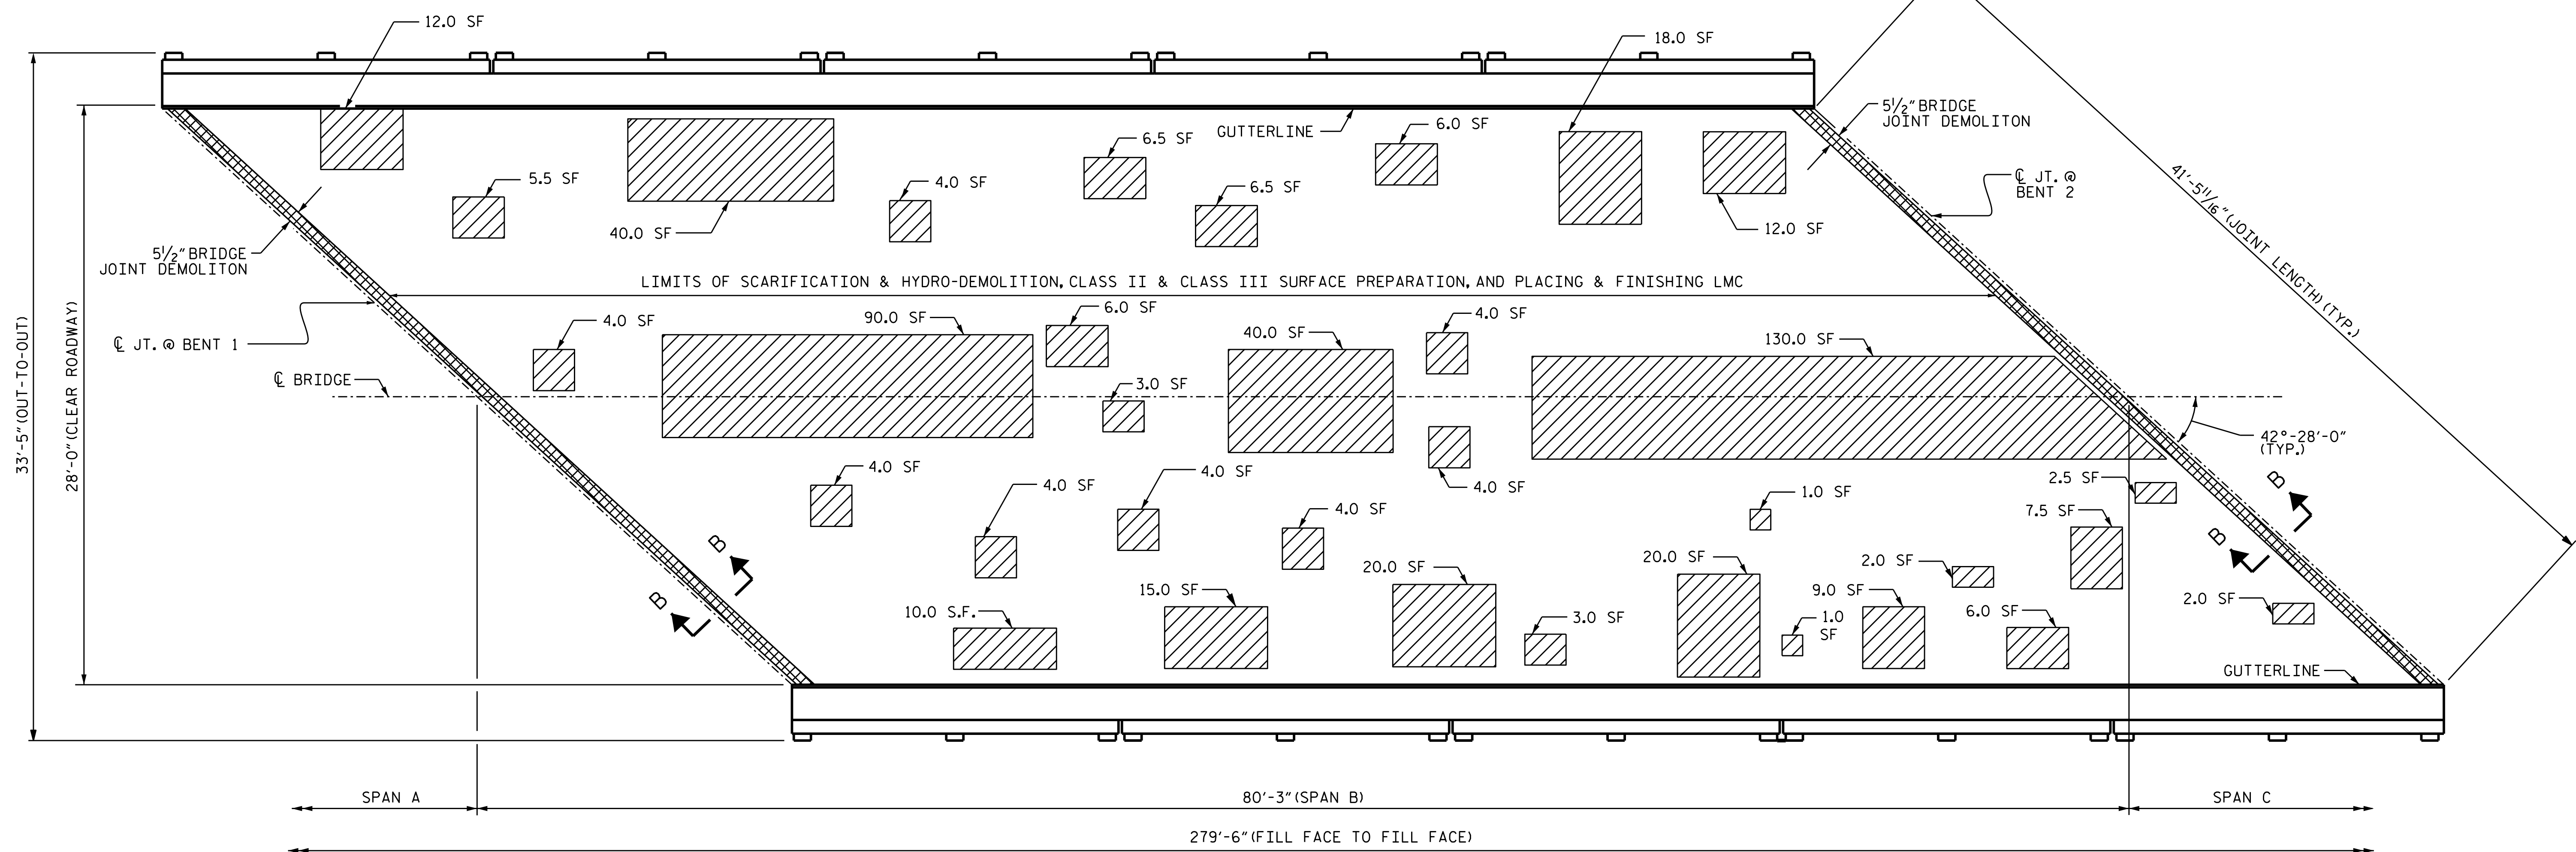

PLAN OF SPAN B

(SEE SHEET NO. S4-09 FOR SECTIONS B-B)

PROJECT NO. 15BPR.47
 NASH COUNTY
 BRIDGE NO. 630123


SHEET 2 OF 4

NOTES:

REPAIR LOCATIONS AND ESTIMATED QUANTITIES ARE GIVEN WITH THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN IN DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER SHALL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE SUMMARY OF QUANTITIES TABLE.

FOR ADDITIONAL NOTES, SEE SHEET 1 OF 4.

- SCARIFYING AND HYDRO-DEMOLITION OF BRIDGE DECK FOR LMC OVERLAY
- APPROX. AREA CLASS II SURFACE PREPARATION
- APPROX. AREA CLASS III SURFACE PREPARATION
- BRIDGE JOINT DEMOLITION

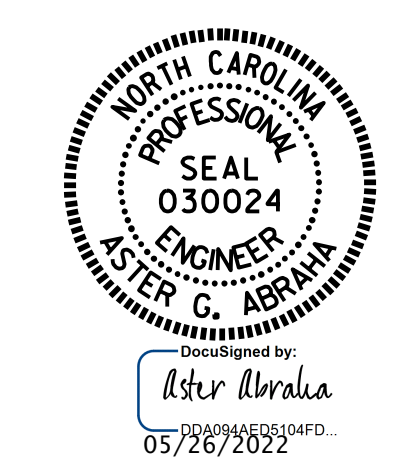

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

**SURFACE PREPARATION
 SPAN B**

DRAWN BY : S. T. SANDOR/A. Y. GODFREY DATE : 02/2022
 CHECKED BY : S. WANCE DATE : 03/2022

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S4-04
1			3			TOTAL SHEETS
2			4			18

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED