


BAGGED STONE AND PIPE SHALL BE PLACED IMMEDIATELY AFTER COMPLETION OF END BENT EXCAVATION. PIPE MAY BE EITHER CONCRETE, CORRUGATED STEEL, CORRUGATED ALUMINUM ALLOY, OR CORRUGATED PLASTIC. PERFORATED PIPE WILL NOT BE ALLOWED.


BAGGED STONE SHALL REMAIN IN PLACE UNTIL THE ENGINEER DIRECTS THAT IT BE REMOVED. THE CONTRACTOR SHALL REMOVE AND DISPOSE OF SILT ACCUMULATIONS AT BAGGED STONE WHEN SO DIRECTED BY THE ENGINEER. BAGS SHALL BE REMOVED AND REPLACED WHENEVER THE ENGINEER DETER-MINES THAT THEY HAVE DETERIORATED AND LOST THEIR EFFECTIVENESS.

NO SEPARATE PAYMENT WILL BE MADE FOR THIS WORK AND THE ENTIRE COST OF THIS WORK SHALL BE INCLUDED IN THE UNIT CONTRACT PRICE BID FOR THE SEVERAL PAY ITEMS.

TEMPORARY DRAINAGE AT END BENT

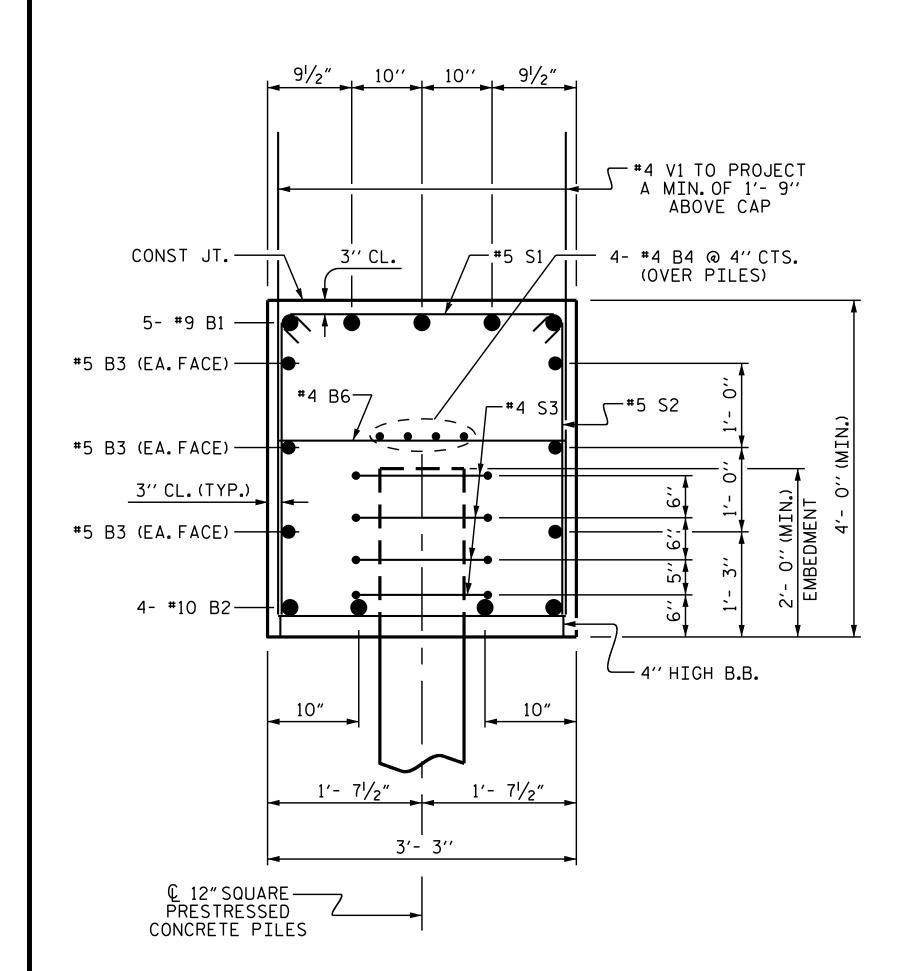


|--|

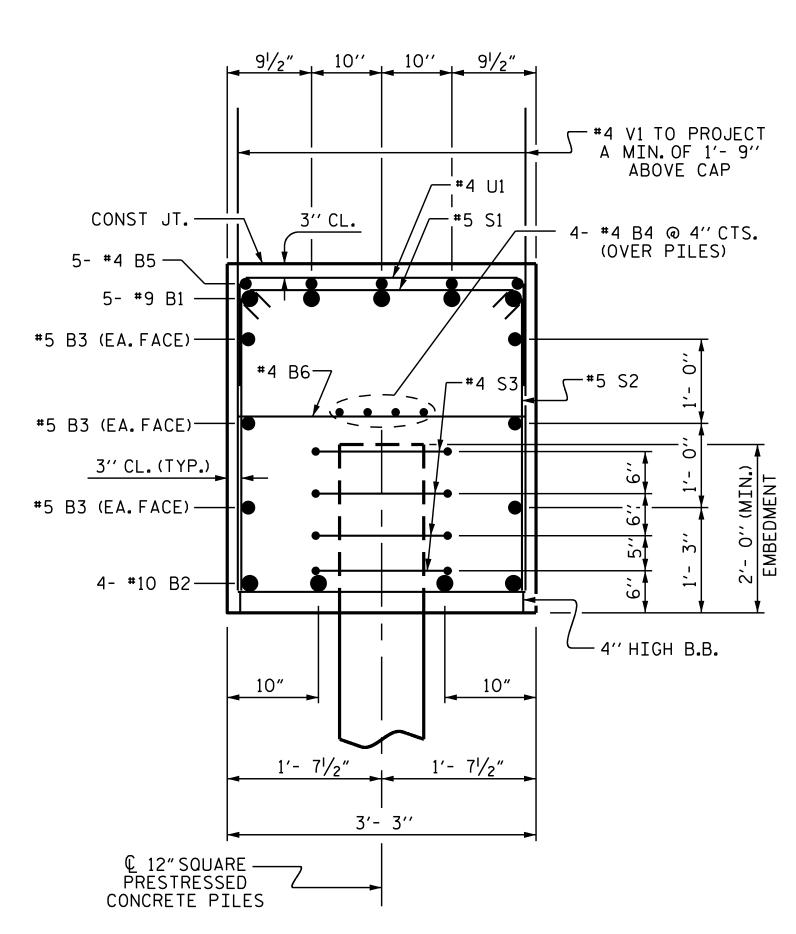

SECTION B-B

BILL OF MATERIAL								
BAR	NO.	SIZE	TYPE	LENGTH	WE	IGHT		
* B1 * B2 * B3 * B4 * B5 * B6	5 4 6 4 5 10	9 10 5 4 4	1 STR STR STR STR	42'- 5'' 42'- 9'' 40'- 1" 40'- 0" 12'- 4'' 2'- 9''		721 736 251 107 41 18		
* H1 * H2	36 32	5 5	6 STR	11'- 1'' 12'- 8''		416 423		
* K1	16	5	STR	2'- 6''		42		
* S1 * S2 * S3	44 44 20	5 5 4	2 4 5	3'- 8'' 10'- 11'' 10'- 7''		168 501 141		
* U1	9	4	3	6'- 1''		37		
* V1 * V2	64 56	4 5	STR STR	5′- 8′′ 7′- 10′′		242 458		
	COATED	EEL			4302	LBS.		
CLASS A	AA CONCRE	ETE						
POUR 1: CAP & LOWER PART OF WINGS					22.4	C.Y.		
POUR 2: UPPER PART OF WINGS					4.2	C.Y.		
TOTAL					26.6	.		

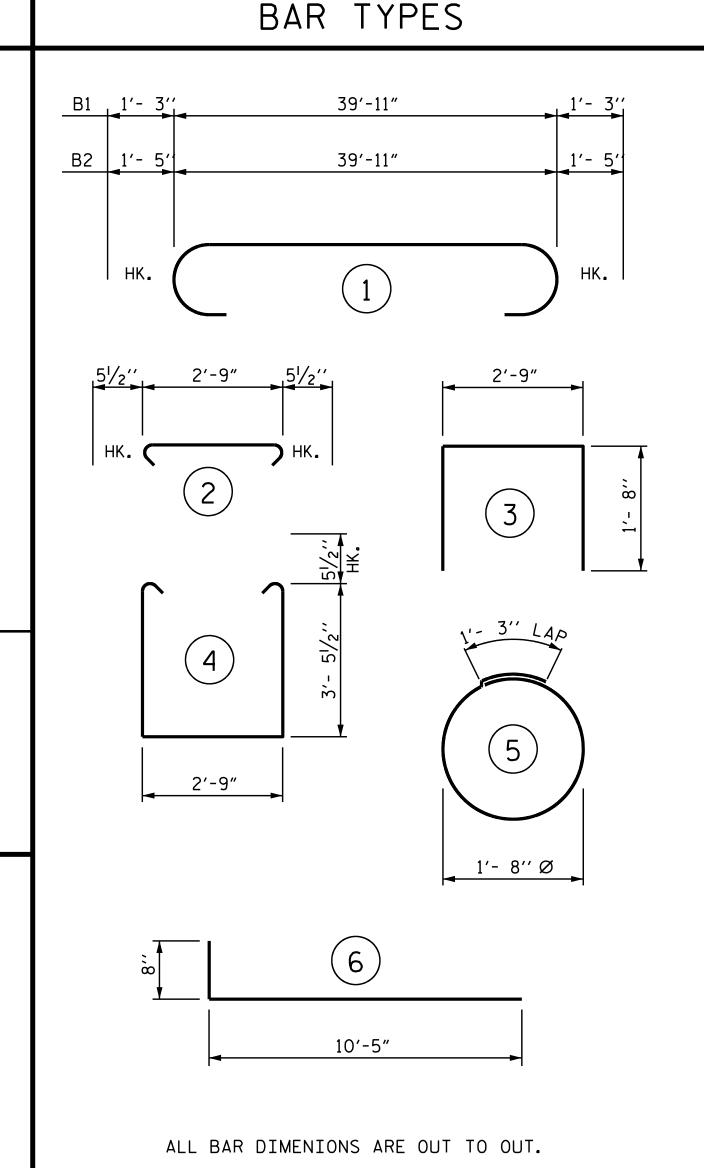

PROJECT NO. B-4593 PAMLICO COUNTY

STATION: 17+02.00 -L-

SHEET 3 OF 3

STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION

> SUBSTRUCTURE INTEGRAL

> > S-30

FINAL UNLESS ALL SIGNATURES COMPLETED



CNE CONTROL OF THE CO			END)	BENT	Γ ,	
5/30/2022			REVISIONS				
CUMENT NOT CONSIDERED	NO.	BY:	DATE:	NO.	BY:	D	
COMENT NOT CONSIDERED	বা			ହ			

OLKERT 5430 Wade Park Blvd., Suite 410 Raleigh, NC 27607 Tel. 919-854-0344 Fax. 919-854-0355 NC License No. F-0765

DATE : 11/18
DATE : 11/18 J.R. MCROY DRAWN BY : . P.N. HOLDER DESIGN ENGINEER OF RECORD: J.R. MCROY DATE: 11/18