


CCTV-1 GPS COORDINATES

34.79260° N
78.99443° W

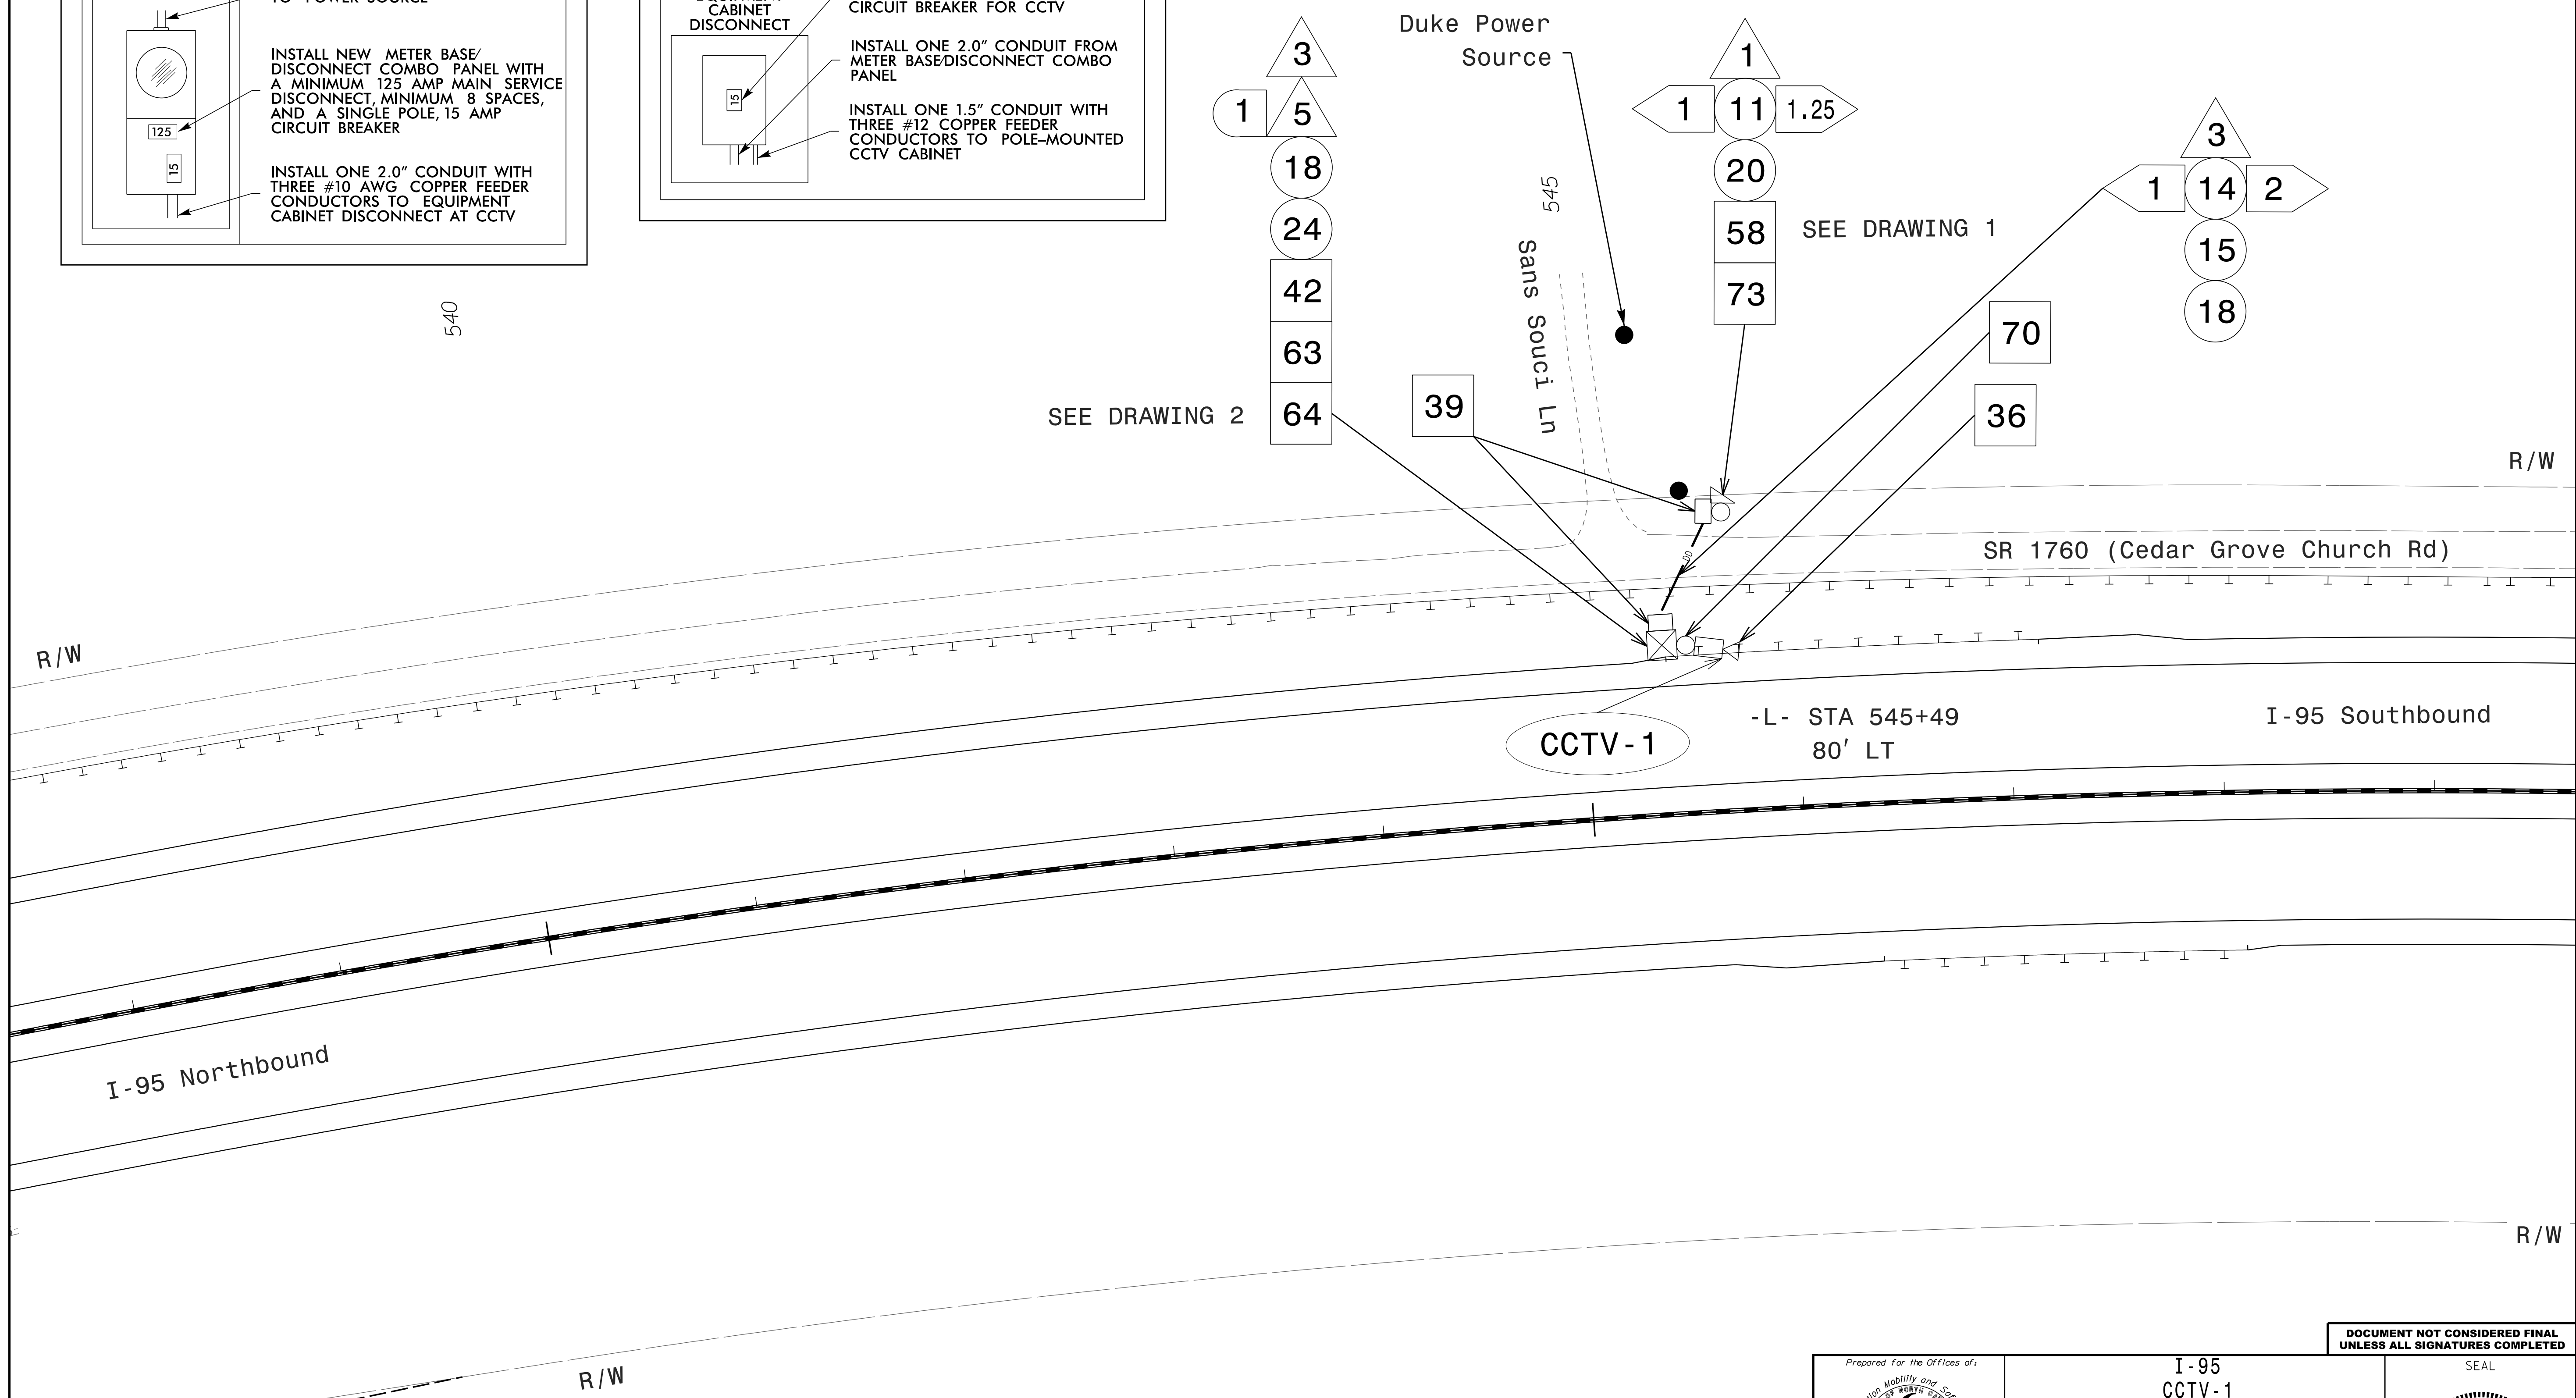

NOTES:

1. POWER COMPANY CONTACT - DUKE ENERGY - ERIC CHAVIS (910) 506-6531.
2. REFER TO SHEET 3B-4 FOR GUARDRAIL INFORMATION.
3. MAINTAIN A MINIMUM OF 6 FEET FROM THE EDGE OF PAVEMENT WHEN TRENCHING PARALLEL TO THE ROADWAY.
4. CONTACT DIVISION 6 TRAFFIC ENGINEER FRANK D. WEST, JR. AT (910) 364-0606 TO CONFIRM THE LOCATION OF THE CCTV/DMS.
5. DO NOT INSTALL CONDUIT OR JUNCTION BOXES UNTIL THE PROPOSED LOCATION OF THE CCTV CAMERA OR DMS HAVE BEEN CONFIRMED BY THE DIVISION TRAFFIC ENGINEER.
6. MOUNT THE CCTV CAMERA 45 FEET ABOVE GRADE.
7. MOUNT THE CCTV CAMERA 5 FEET BELOW THE TOP OF THE POLE.
8. INSTALL CCTV POLE A MINIMUM OF 8 FEET BEHIND GUARDRAIL.

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Prepared For the Offices of:

I-95 CCTV-1 (Mile-Marker 30)

Division 6 Robeson County Lumberton

PLAN DATE: March 2022 REVIEWED BY: S.G. Haynie

PREPARED BY: O. Drobny REVIEWED BY: J. S. Cole

REVISIONS	INIT.	DATE

Scale: 1" = 40'

3/18/2022

SEAL

DocuSigned by:
 Steven G. Haynie
 DATE: 3/18/2022
 CADD File name:

3/11/2022
 R:\ITS\605\gmp\plan_sheets\I-5987B_ITS_psh_05_LMB00.dgn
 10:01:17 AM