


**PART PLAN - ROOF SLAB**

**PART PLAN - FLOOR SLAB**

NOTE: FOR S1 BARS IN FLOOR SLAB & FOOTING, SEE WING SHEET.

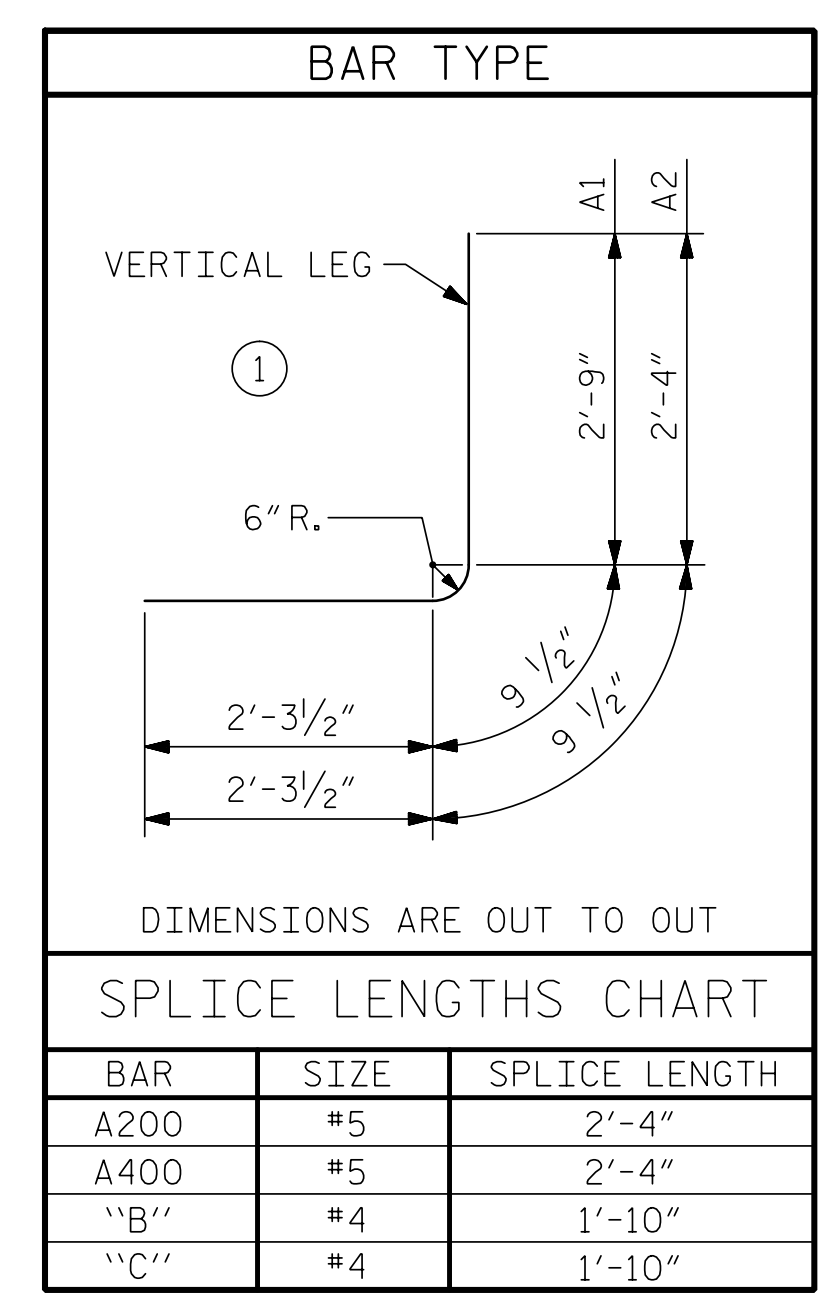

BAR SCHEDULE					
BAR	NO.	SIZE	TYPE	LENGTH	WEIGHT
A1	196	#4	1	5'-10"	764
A2	196	#4	1	5'-5"	709
A100	69	#5	STR	29'-6"	2123
A200	57	#5	STR	29'-6"	1754
A300	98	#5	STR	29'-6"	3015
A400	98	#5	STR	29'-6"	3015
B1	114	#4	STR	9'-2"	698
B2	196	#4	STR	7'-4"	960
B3	150	#4	STR	9'-2"	919
C1	216	#4	STR	29'-4"	4232
G1	4	#5	STR	29'-6"	123
REINFORCING STEEL					18,312 LBS

PROJECT NO. I-5987B  
ROBESON COUNTY  
 STATION: 902+33.00 -L-

SHEET 4 OF 9

DOCUMENT NOT CONSIDERED FINAL  
 UNLESS ALL SIGNATURES COMPLETED

TGS ENGINEERS  
 706 HILLSBOROUGH STREET  
 SUITE 200  
 RALEIGH, NC 27603  
 PH (919) 773-8887  
 CORP. LICENSE NO.: C-0275

STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH

**TRIPLE 9 FT. X 8 FT.  
 CONCRETE BOX CULVERT  
 STAGE I**

REVISIONS					
NO.	BY:	DATE:	NO.	BY:	DATE:
1			3		
2			4		

SHEET NO. C18-4  
 TOTAL SHEETS 9

ASSEMBLED BY : ZCS DATE : 10/21  
 CHECKED BY : MCC DATE : 10/21  
 DRAWN BY : TSS 11/90 REV. 6/19 MAA/THC  
 CHECKED BY : ARB 11/90