


**PART PLAN - FLOOR SLAB**

**PART PLAN - ROOF SLAB**

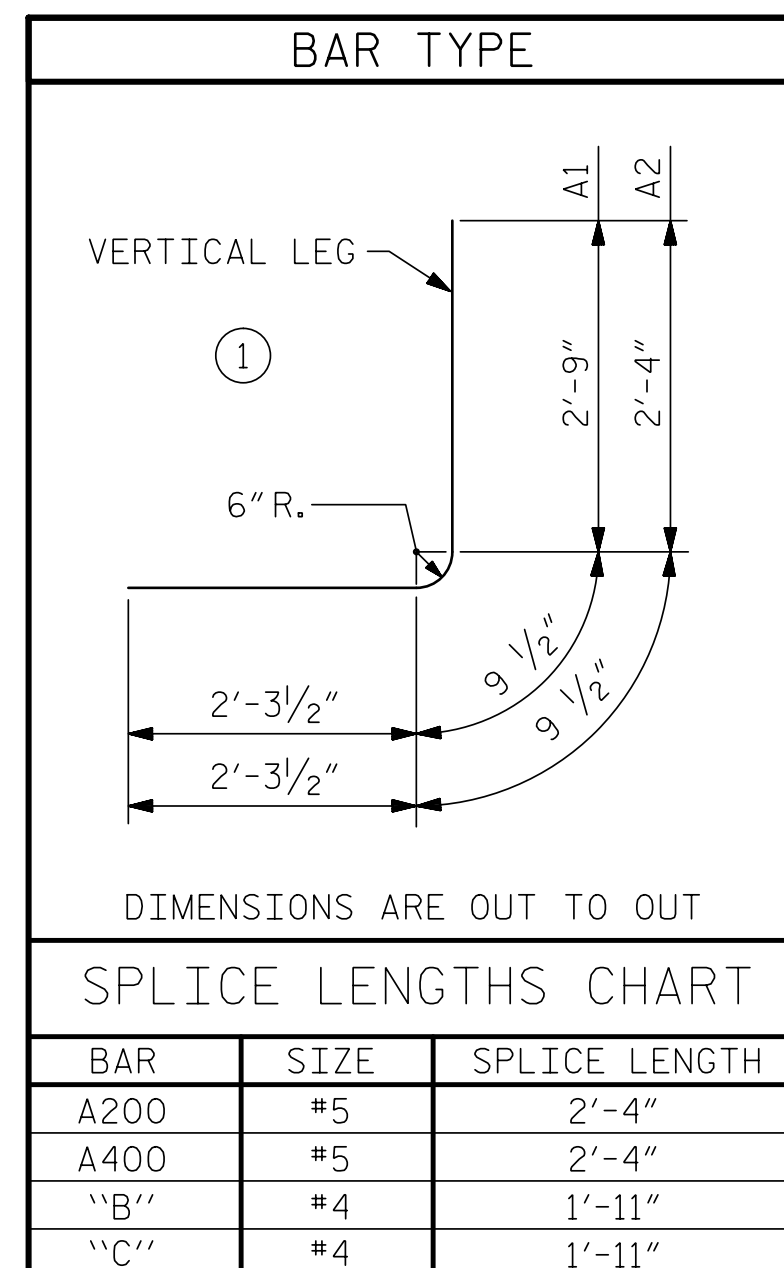

BAR SCHEDULE					
BAR	NO.	SIZE	TYPE	LENGTH	WEIGHT
A1	298	#4	1	5'-10"	1161
A2	298	#4	1	5'-5"	1078
A100	105	#5	STR	29'-6"	3231
A200	87	#5	STR	29'-6"	2677
A300	149	#5	STR	29'-6"	4585
A400	149	#5	STR	29'-6"	4585
B1	174	#4	STR	9'-2"	1065
B2	298	#4	STR	7'-4"	1460
B3	230	#4	STR	9'-2"	1408
C1	324	#4	STR	30'-2"	6529
G1	4	#5	STR	29'-6"	123
D1	54	#6	STR	2'-6"	203
REINFORCING STEEL				28,105 LBS	

NOTE: FOR S1 BARS IN FLOOR SLAB & FOOTING, SEE WING SHEET.

PROJECT NO. I-5987B  
ROBESON COUNTY  
 STATION: 902+33.00 -L-

SHEET 8 OF 9  
 STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH  
 TRIPLE 9 FT. X 8 FT.  
 CONCRETE BOX CULVERT  
 STAGE III

4/12/2022 | 10:50 AM EDT

DOCUMENT NOT CONSIDERED FINAL  
 UNLESS ALL SIGNATURES COMPLETED

TGS ENGINEERS  
 706 HILLSBOROUGH STREET  
 SUITE 200  
 RALEIGH, NC 27603  
 PH (919) 773-8887  
 CORP. LICENSE NO.: C-0275

REVISIONS						SHEET NO.	
NO.	BY:	DATE:	NO.	BY:	DATE:	C18-8	
1			3			TOTAL SHEETS	
2			4			9	

ASSEMBLED BY : ZCS DATE : 10/21  
 CHECKED BY : MGC DATE : 10/21  
 DRAWN BY : TSS 11/90 REV. 6/19 MAA/THC  
 CHECKED BY : ARB 11/90