

NOTES (CONT.):

INSTALL PILE SLEEVES FOR END BENT NO.2 LOCATED AT STA.25+56.91 -Y4- WHILE CONSTRUCTING RETAINING WALL NO.W4B.OBSERVE A 2 MONTH WAITING PERIOD AFTER CONSTRUCTING THE RETAINING WALL AND THE REINFORCED BRIDGE APPROACH FILL TO WITHIN 1 FT OF THE FINAL GRADE ELEVATION.FOR BRIDGE WAITING PERIODS,SEE ROADWAY PLANS AND SECTION 235 OF THE STANDARD SPECIFICATIONS.

INSTALL PILE SLEEVES FOR END BENT NO.1 LOCATED AT STA.28+32.29 -Y1B- WHILE CONSTRUCTING RETAINING WALL NO.W6A.OBSERVE A 4 MONTH WAITING PERIOD AFTER CONSTRUCTING THE RETAINING WALL AND THE REINFORCED BRIDGE APPROACH FILL TO WITHIN 1 FT OF THE FINAL GRADE ELEVATION.FOR BRIDGE WAITING PERIODS,SEE ROADWAY PLANS AND SECTION 235 OF THE STANDARD SPECIFICATIONS.



INSTALL PILE SLEEVES FOR END BENT NO.2 LOCATED AT STA.30+69.79 -Y1B- WHILE CONSTRUCTING RETAINING WALL NO.W6B.OBSERVE A 4 MONTH WAITING PERIOD AFTER CONSTRUCTING THE RETAINING WALL AND THE REINFORCED BRIDGE APPROACH FILL TO WITHIN 1 FT OF THE FINAL GRADE ELEVATION.FOR BRIDGE WAITING PERIODS,SEE ROADWAY PLANS AND SECTION 235 OF THE STANDARD SPECIFICATIONS.

INSTALL PILE SLEEVES FOR END BENT NO.1 LOCATED AT STA.29+32.44 -Y6- WHILE CONSTRUCTING RETAINING WALL NO.W7A.OBSERVE A 2 MONTH WAITING PERIOD AFTER CONSTRUCTING THE RETAINING WALL AND THE REINFORCED BRIDGE APPROACH FILL TO WITHIN 1 FT OF THE FINAL GRADE ELEVATION.FOR BRIDGE WAITING PERIODS,SEE ROADWAY PLANS AND SECTION 235 OF THE STANDARD SPECIFICATIONS.

INSTALL PILE SLEEVES FOR END BENT NO.2 LOCATED AT STA.31+23.77 -Y6- WHILE CONSTRUCTING RETAINING WALL NO.W7B.OBSERVE A 3 MONTH WAITING PERIOD AFTER CONSTRUCTING THE RETAINING WALL AND THE REINFORCED BRIDGE APPROACH FILL TO WITHIN 1 FT OF THE FINAL GRADE ELEVATION.FOR BRIDGE WAITING PERIODS,SEE ROADWAY PLANS AND SECTION 235 OF THE STANDARD SPECIFICATIONS.


INSTALL PILE SLEEVES FOR END BENT NO.1 LOCATED AT STA.28+85.72 -Y7- WHILE CONSTRUCTING RETAINING WALL NO.W8A.OBSERVE A 2 MONTH WAITING PERIOD AFTER CONSTRUCTING THE RETAINING WALL AND THE REINFORCED BRIDGE APPROACH FILL TO WITHIN 1 FT OF THE FINAL GRADE ELEVATION.FOR BRIDGE WAITING PERIODS,SEE ROADWAY PLANS AND SECTION 235 OF THE STANDARD SPECIFICATIONS.

INSTALL PILE SLEEVES FOR END BENT NO.2 LOCATED AT STA.30+55.72 -Y7- WHILE CONSTRUCTING RETAINING WALL NO.W8B.OBSERVE A 2 MONTH WAITING PERIOD AFTER CONSTRUCTING THE RETAINING WALL AND THE REINFORCED BRIDGE APPROACH FILL TO WITHIN 1 FT OF THE FINAL GRADE ELEVATION.FOR BRIDGE WAITING PERIODS,SEE ROADWAY PLANS AND SECTION 235 OF THE STANDARD SPECIFICATIONS.


GEOTECHNICAL ENGINEER  SEAL 048207 STEPHEN C. CROCKETT	ENGINEER
DocuSigned by: 	04/12/2022 DATE
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

PROJECT NO.: I-5987B
 ROBESON COUNTY
 STATION: _____
 SHEET 19 OF 19

PREPARED BY: S. CROCKETT	DATE: 3/29/22
REVIEWED BY: J. HAMM	DATE: 3/29/22

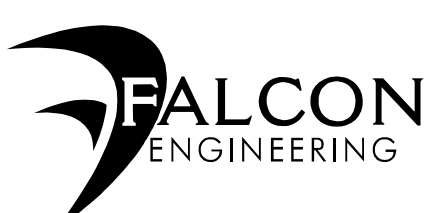

FALCON ENGINEERING, INC.
 1210 TRINITY ROAD, SUITE 110
 CARY, NC 27513
 PHONE: 919.871.0800
 www.falconengineers.com

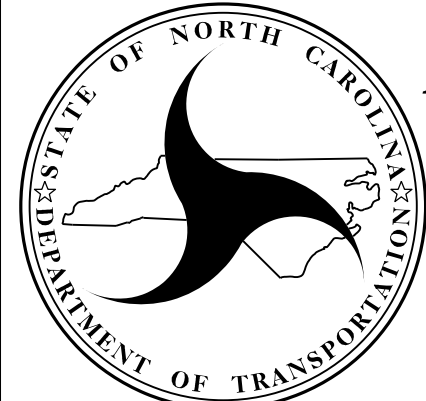

**NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 DIVISION OF HIGHWAYS**

**GEOTECHNICAL
 ENGINEERING UNIT**

**MSE WALL WITH PANELS NOTES
CONTINUED**

<i>REVISIONS</i>						SHEET NO. W-19
NO.	BY	DATE	NO.	BY	DATE	
1			3			
2			4			