
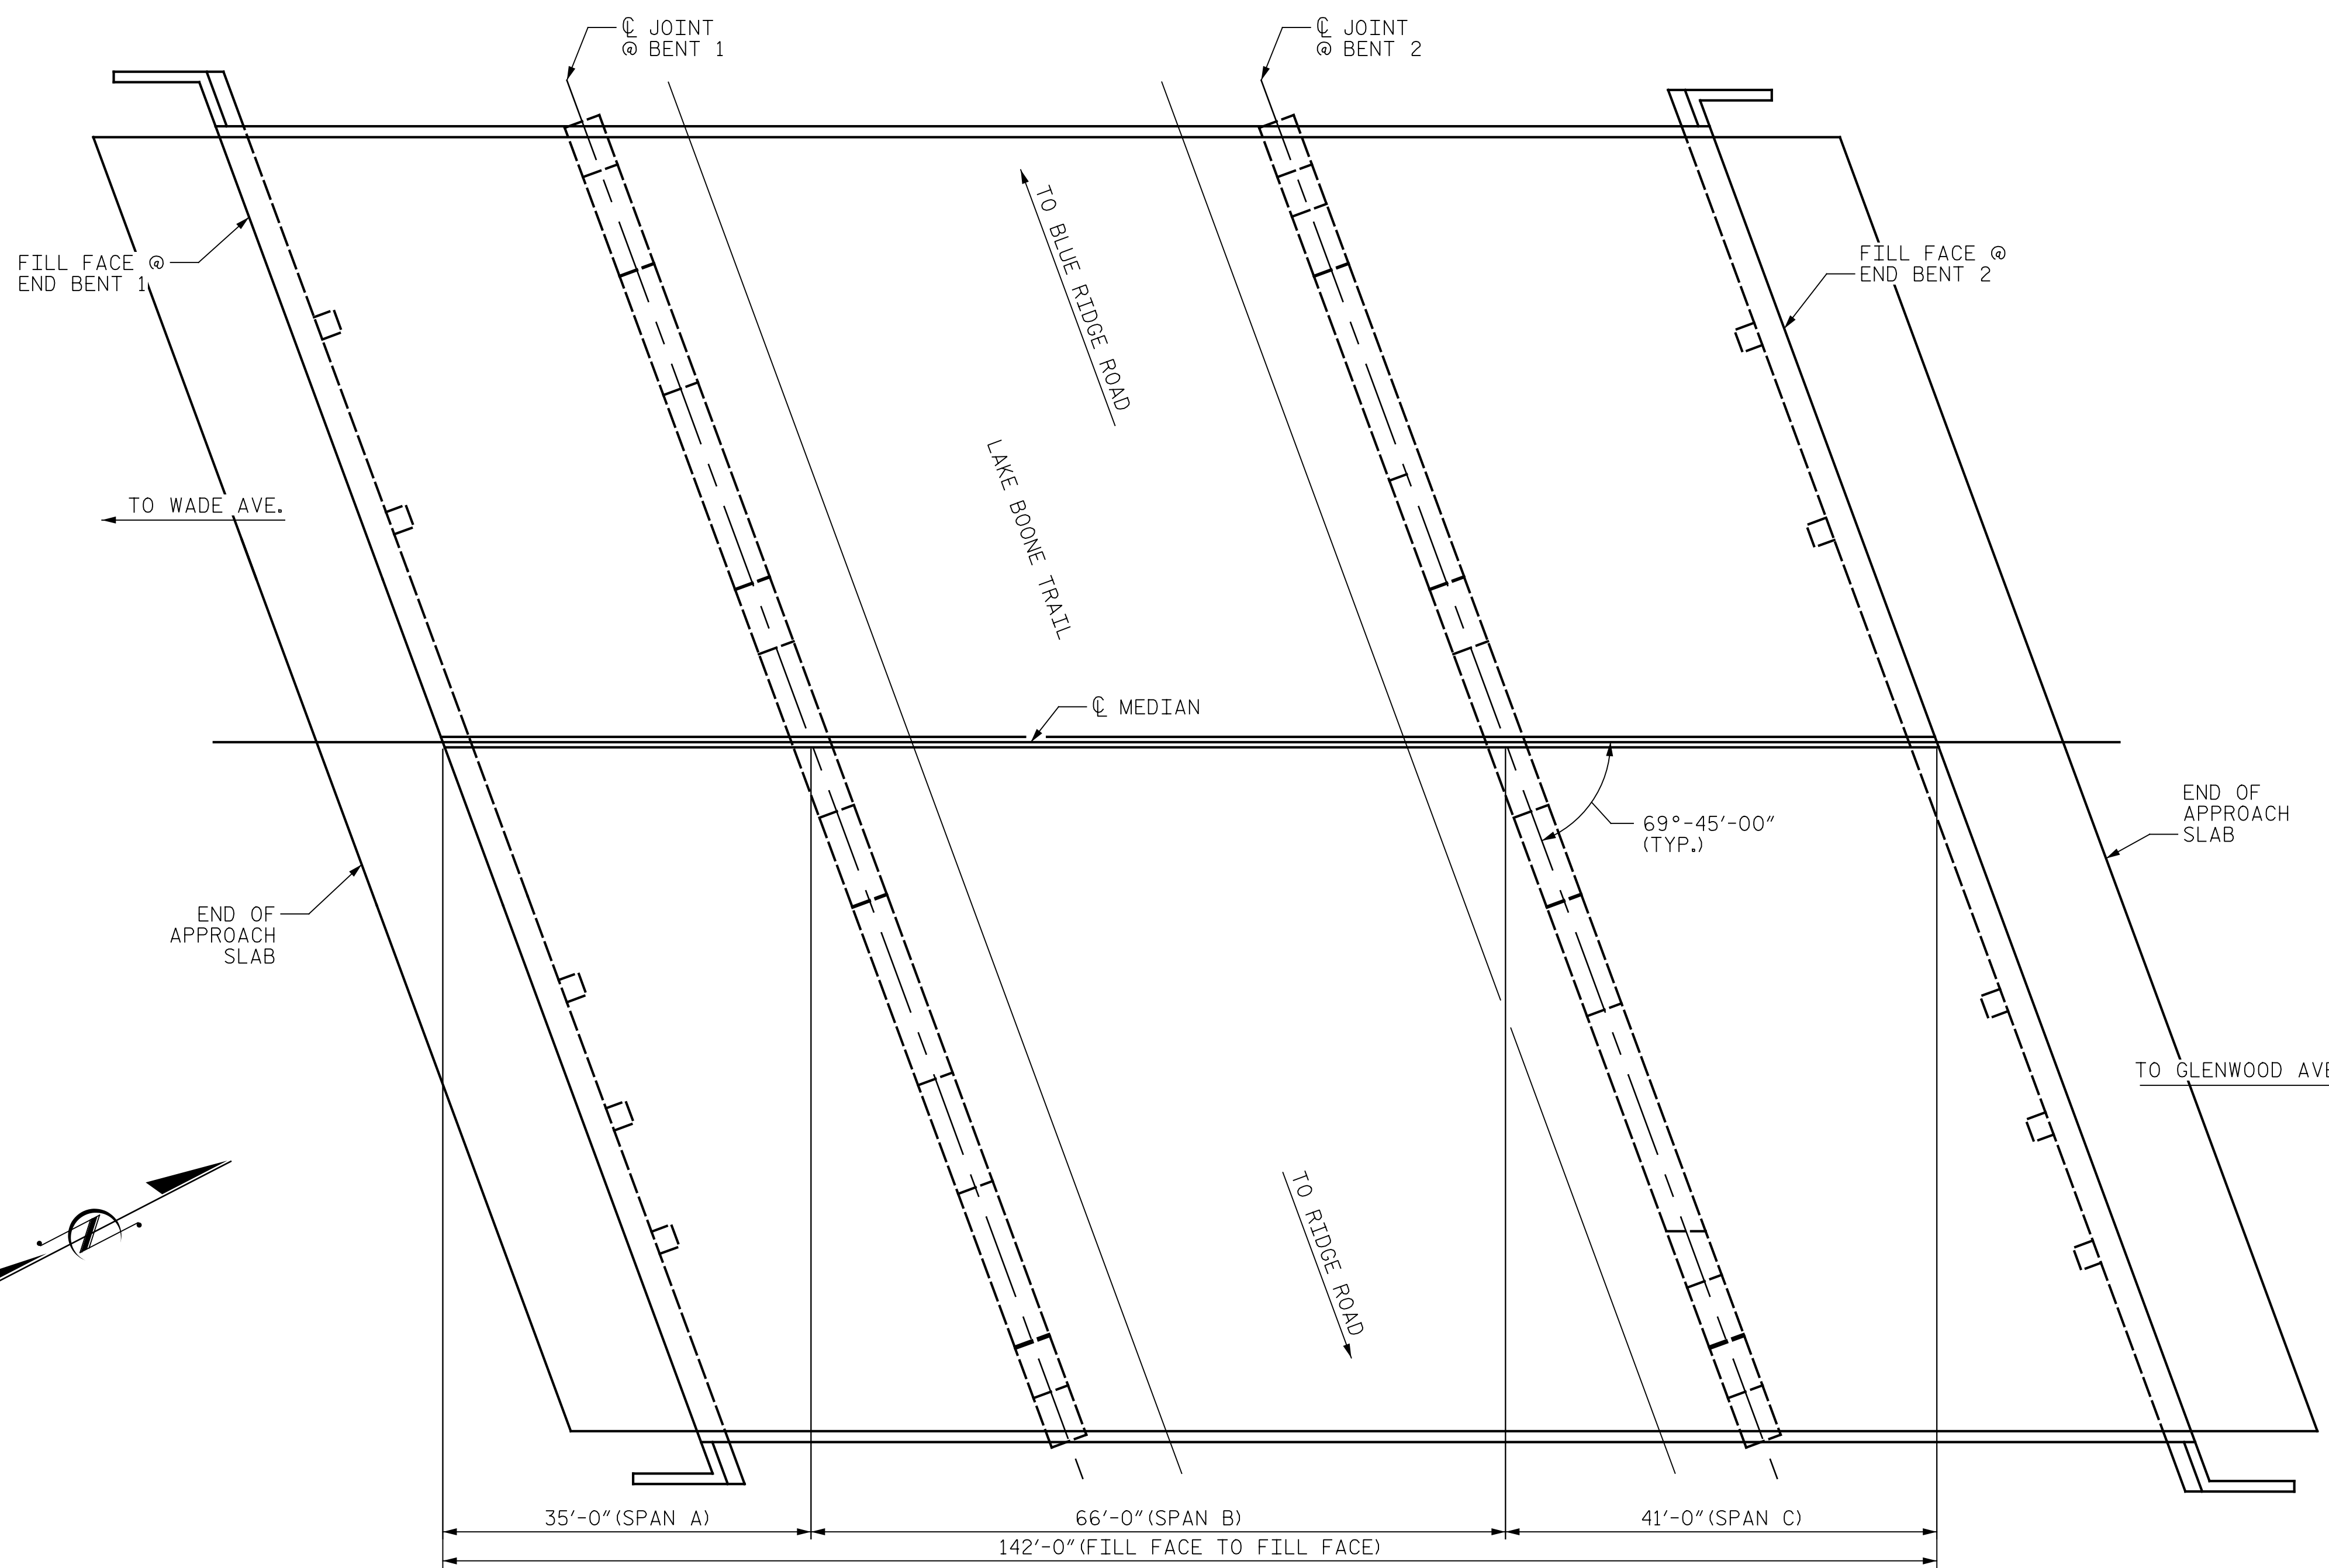


p:\gfn\pw\bentley.com\gfn\pw-01\Documents\Projects\67945\Phase 003 - I-5997 Rehab\Structures\CAD\2.0 100% Plans\401_007_I5997_SMU_GD01_910242_002
 11/22/2021 9:15:19 AM pdf_color_gfclt_FS.plt Rowan,pen,tbl

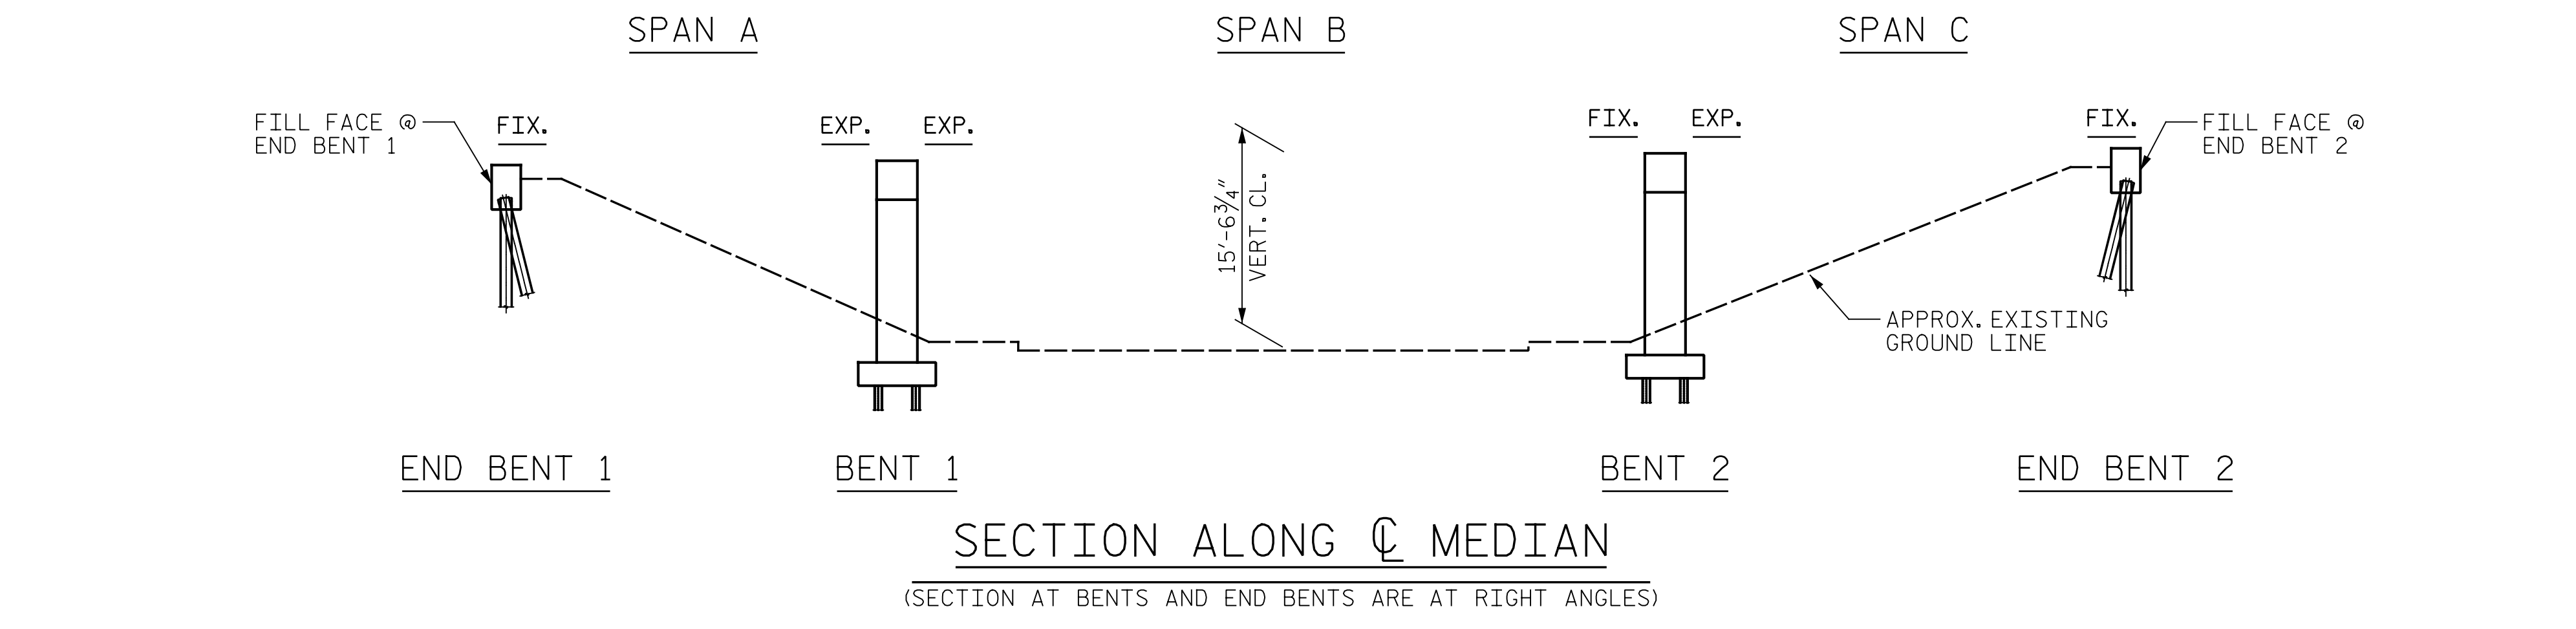

NOTES:

- GENERAL DRAWING INFORMATION IS TAKEN FROM THE ORIGINAL PLANS AND THE ROUTINE INSPECTION REPORT DATED 1/24/2021.
- BRIDGE ORIENTATION CONFORMS TO THE EXISTING BRIDGE PLANS AND ROUTINE INSPECTION REPORT.
- SCOPE OF WORK**
- APPLY DECK SEALANT TO PREPARED TOP OF BRIDGE DECK.
 - REMOVE EXISTING JOINT MATERIAL AND INSTALL FOAM JOINTS.
 - RESET EXISTING BEARINGS.
 - REPAIR PRESTRESSED CONCRETE GIRDERS.
 - CLEAN AND EPOXY COAT EXISTING PRESTRESSED CONCRETE GIRDER ENDS.
 - REMOVE DEBRIS FROM TOP OF EXISTING END BENTS AND BENT CAPS AND APPLY EPOXY COATING.
 - EPOXY RESIN INJECTION OF CONCRETE CRACKS.
 - REMOVE UNSOUND AND SPALLED CONCRETE AND PROPERLY PREPARE EXISTING END BENT AND BENT AREAS FOR SHOTCRETE AND CONCRETE REPAIRS.
 - REPAIR CONCRETE BARRIER RAIL.

I HEREBY CERTIFY THAT THIS STRUCTURE WAS REHABILITATED ACCORDING TO THESE PLANS OR AS NOTED HEREIN.

RESIDENT ENGINEER _____ DATE _____

PROJECT NO. I-5997
WAKE COUNTY
 BRIDGE NO. 910242

SHEET 1 OF 2

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

GENERAL DRAWING
 FOR BRIDGE ON I-440
 (CLIFF BENSON BELTLINE)
 OVER SR 1676 (LAKE
 BOONE TRAIL)



DRAWN BY : T. HARTLEY DATE : 09/2021
 CHECKED BY : J. YANNAACONE DATE : 09/2021
 DESIGN ENGINEER OF RECORD: R. NELSON DATE : 09/2021

PLAN
 (PILES NOT SHOWN FOR CLARITY)

PLANS PREPARED BY:
Gannett Fleming
 Excellence Delivered As Promised

One Glenwood Avenue
 Suite 900
 Raleigh, NC 27603
 (919) 420-7660
 NC Lic. No. F-0270

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			S-2
2			4			TOTAL SHEETS 82