



p:\gfn\p-w\ben\ben\p-w-01\Documents\Projects\67945\Phase 003 - I-5997 Rehab\Structures\CAD\2.0 100% Plans\403-001-15997-SMU-001-910263-910264-033  
 1/10/2022 10:41:33 PM pdf\_color\_gfclt\_FS.plt Rowan.pen.tbl

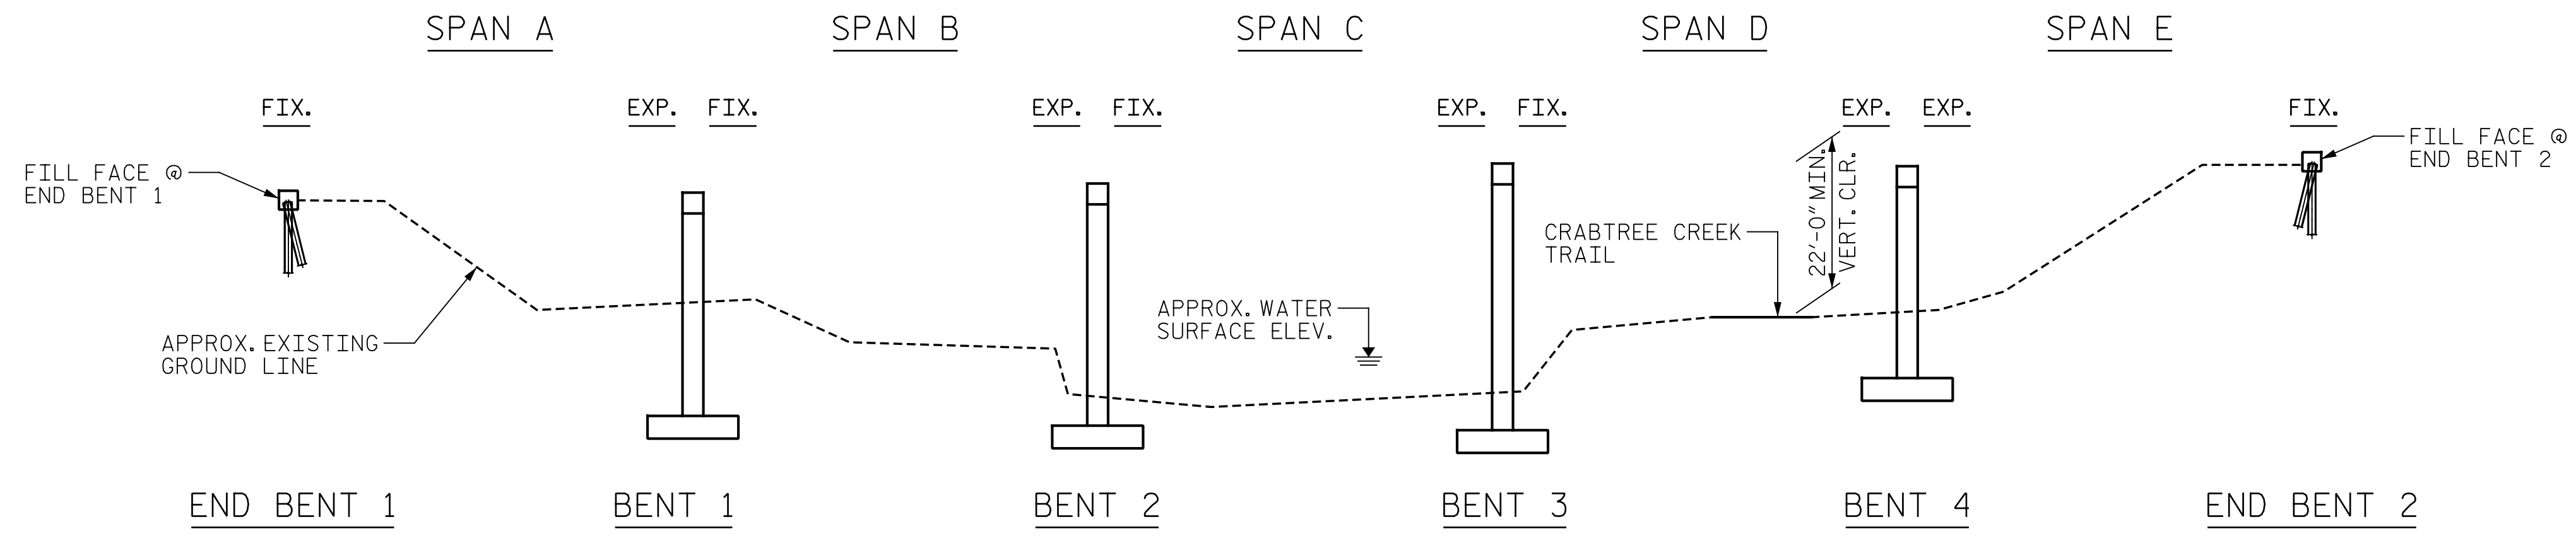

**SECTION ALONG CL MEDIAN**  
 (SECTION AT BENTS AND END BENTS ARE AT RIGHT ANGLES)

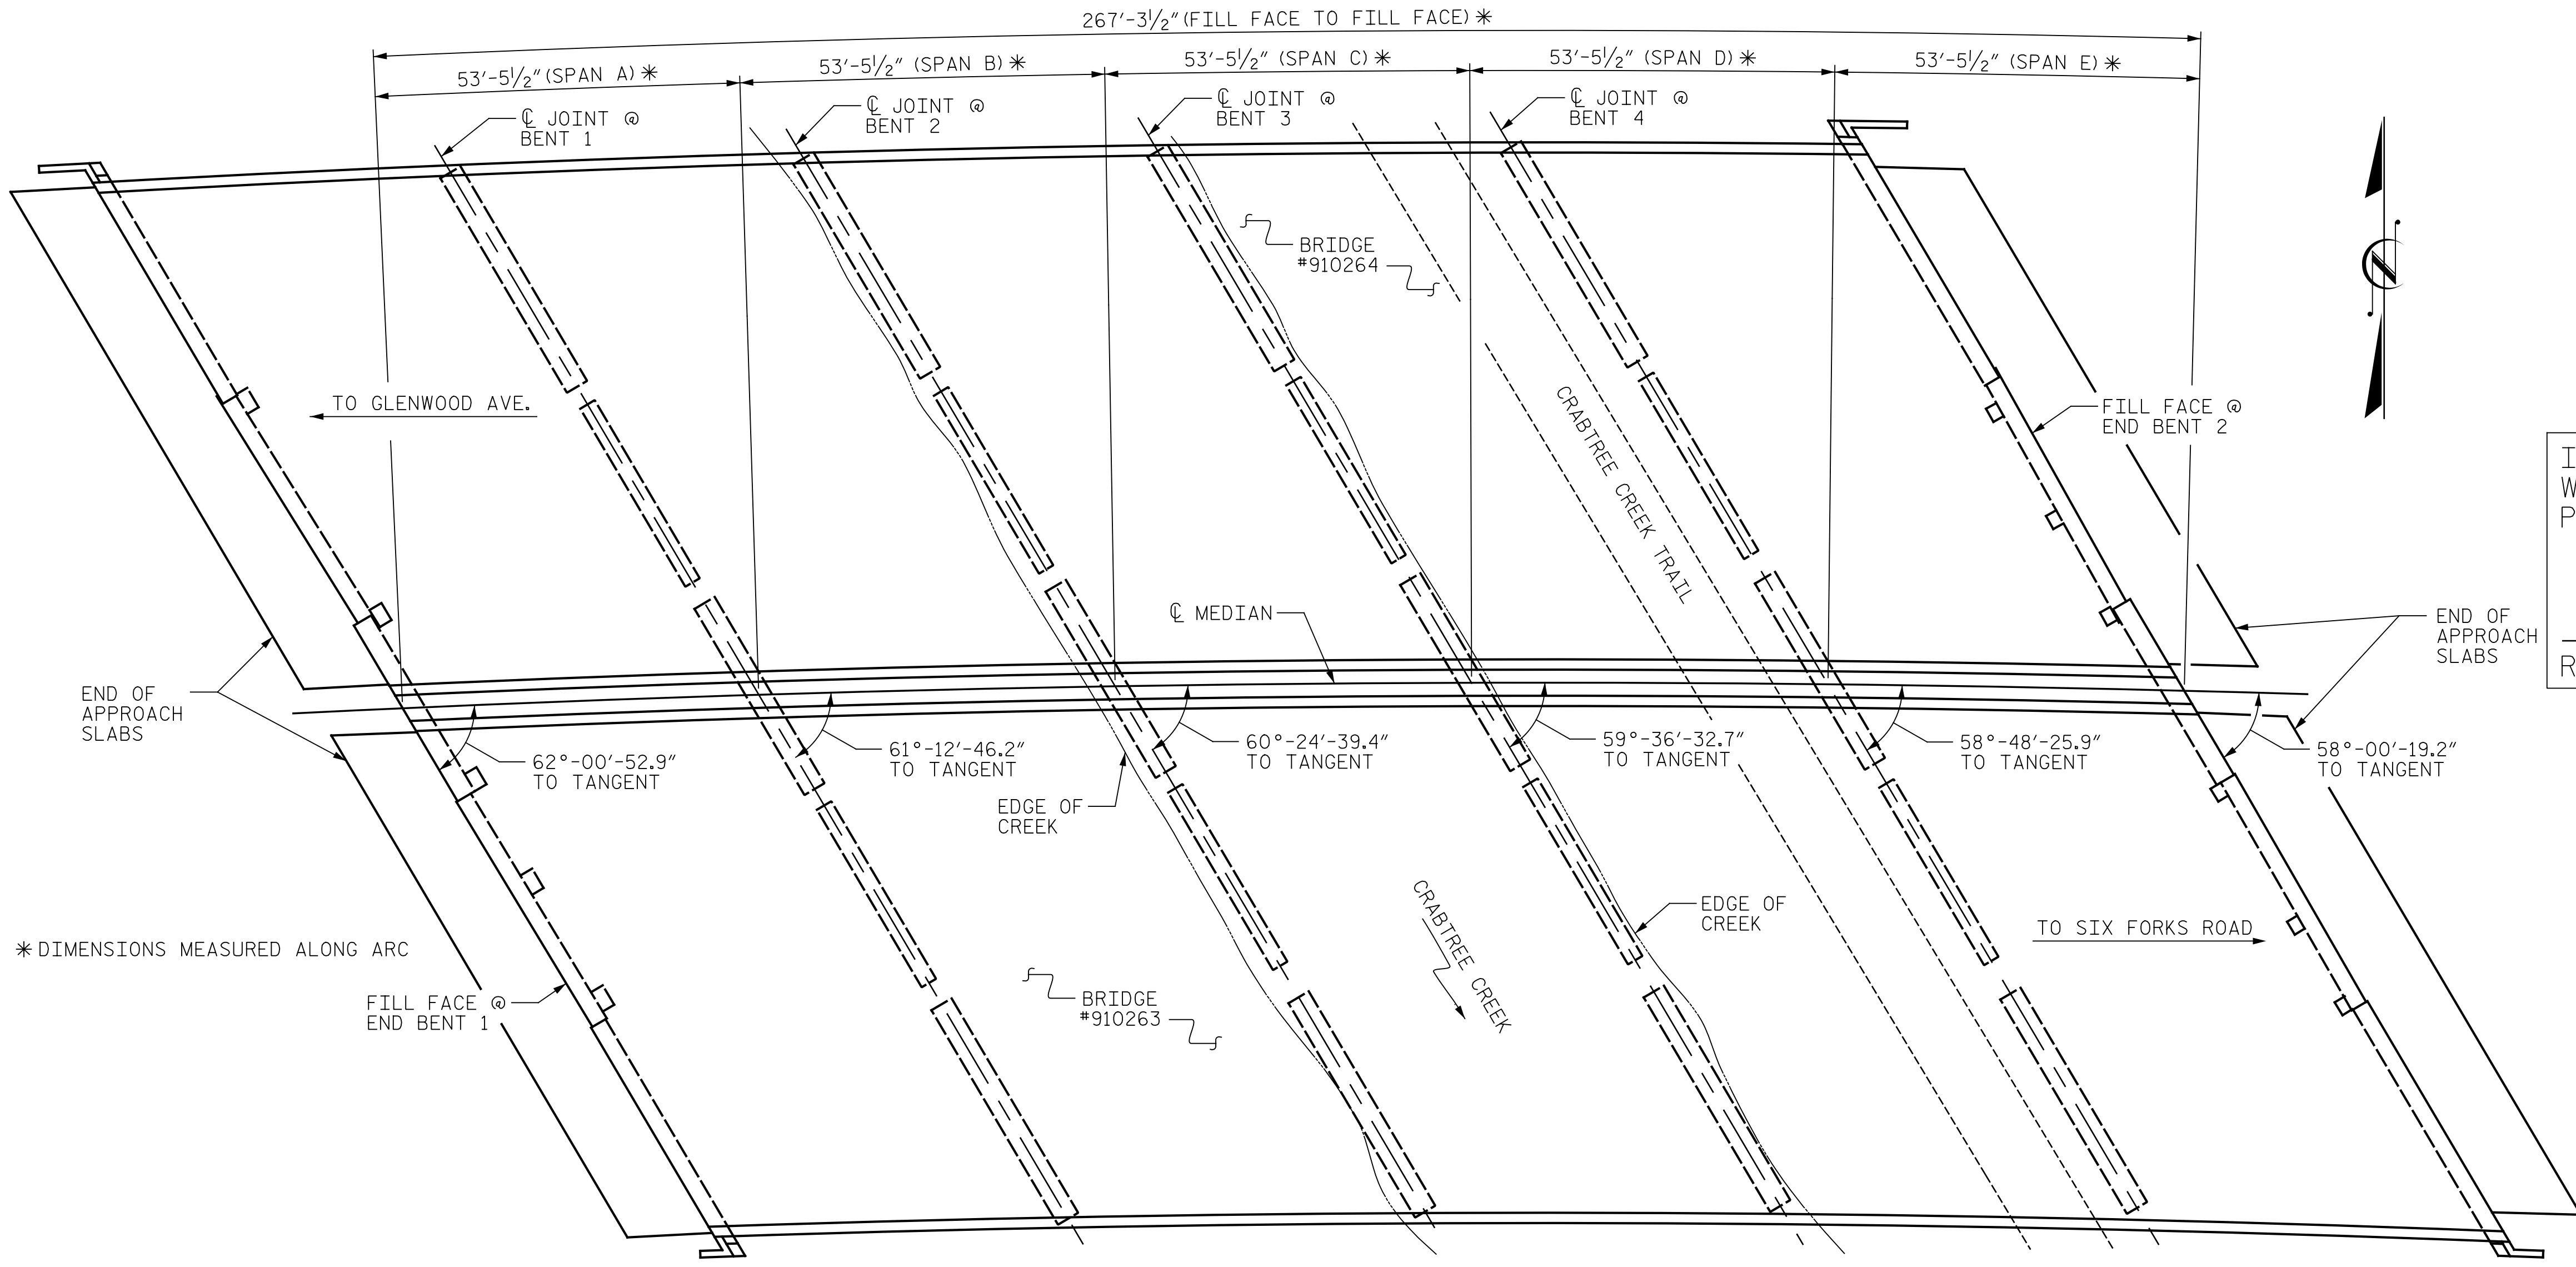

**PLAN**  
 (PILES NOT SHOWN FOR CLARITY)

- NOTES:**
- GENERAL DRAWING INFORMATION IS TAKEN FROM THE ORIGINAL PLANS AND THE ROUTINE INSPECTION REPORT DATED 7/21/2020.
- BRIDGE ORIENTATION CONFORMS TO THE EXISTING BRIDGE PLANS AND ROUTINE INSPECTION REPORT.
- SCOPE OF WORK**
- PARTIALLY REMOVE TOP OF BRIDGE DECK CONCRETE BY FINE MILLING AND HYDRO-DEMOLITION.
  - OVERLAY PREPARED TOP OF BRIDGE DECK WITH VERY EARLY STRENGTH LATEX MODIFIED CONCRETE (LMC-VES).
  - REMOVE EXISTING JOINT MATERIAL AND INSTALL FOAM JOINTS.
  - DIAMOND GRIND AND APPLY SILANE DECK TREATMENT TO LMC-VES BRIDGE DECK.
  - CLEAN, REPAIR AND PAINT EXISTING STRUCTURAL STEEL BEAMS.
  - REPAIR DECK DRAINS.
  - REMOVE DEBRIS FROM TOP OF EXISTING END BENTS AND BENT CAPS AND APPLY EPOXY COATING.
  - EPOXY RESIN INJECTION OF CONCRETE CRACKS.
  - REMOVE UNSOUND AND SPALLED CONCRETE AND PROPERLY PREPARE EXISTING END BENT AND BENT AREAS FOR SHOTCRETE AND CONCRETE REPAIRS.
  - REPAIR PEDESTRIAN SAFETY FENCE.

I HEREBY CERTIFY THAT THIS STRUCTURE  
 WAS REHABILITATED ACCORDING TO THESE  
 PLANS OR AS NOTED HEREIN.

\_\_\_\_\_  
 RESIDENT ENGINEER

\_\_\_\_\_  
 DATE

PROJECT NO. I-5997  
WAKE COUNTY  
 BRIDGE NO. 910263 &  
910264

SHEET 1 OF 2

STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH

**GENERAL DRAWING**  
 FOR BRIDGES ON I-440  
 (CLIFF BENSON BELTLINE)  
 OVER CRABTREE CREEK



DRAWN BY : T. HARTLEY DATE : 09/2021  
 CHECKED BY : J. YANACCONO DATE : 09/2021  
 DESIGN ENGINEER OF RECORD : R. NELSON DATE : 09/2021

PLANS PREPARED BY:  
**Gannett Fleming**  
 Excellence Delivered As Promised  
 One Glenwood Avenue  
 Suite 900  
 Raleigh, NC 27603  
 (919) 420-7660  
 NC Lic. No. F-0270

DOCUMENT NOT CONSIDERED  
 FINAL UNLESS ALL  
 SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-33
1			3			TOTAL SHEETS
2			4			82