
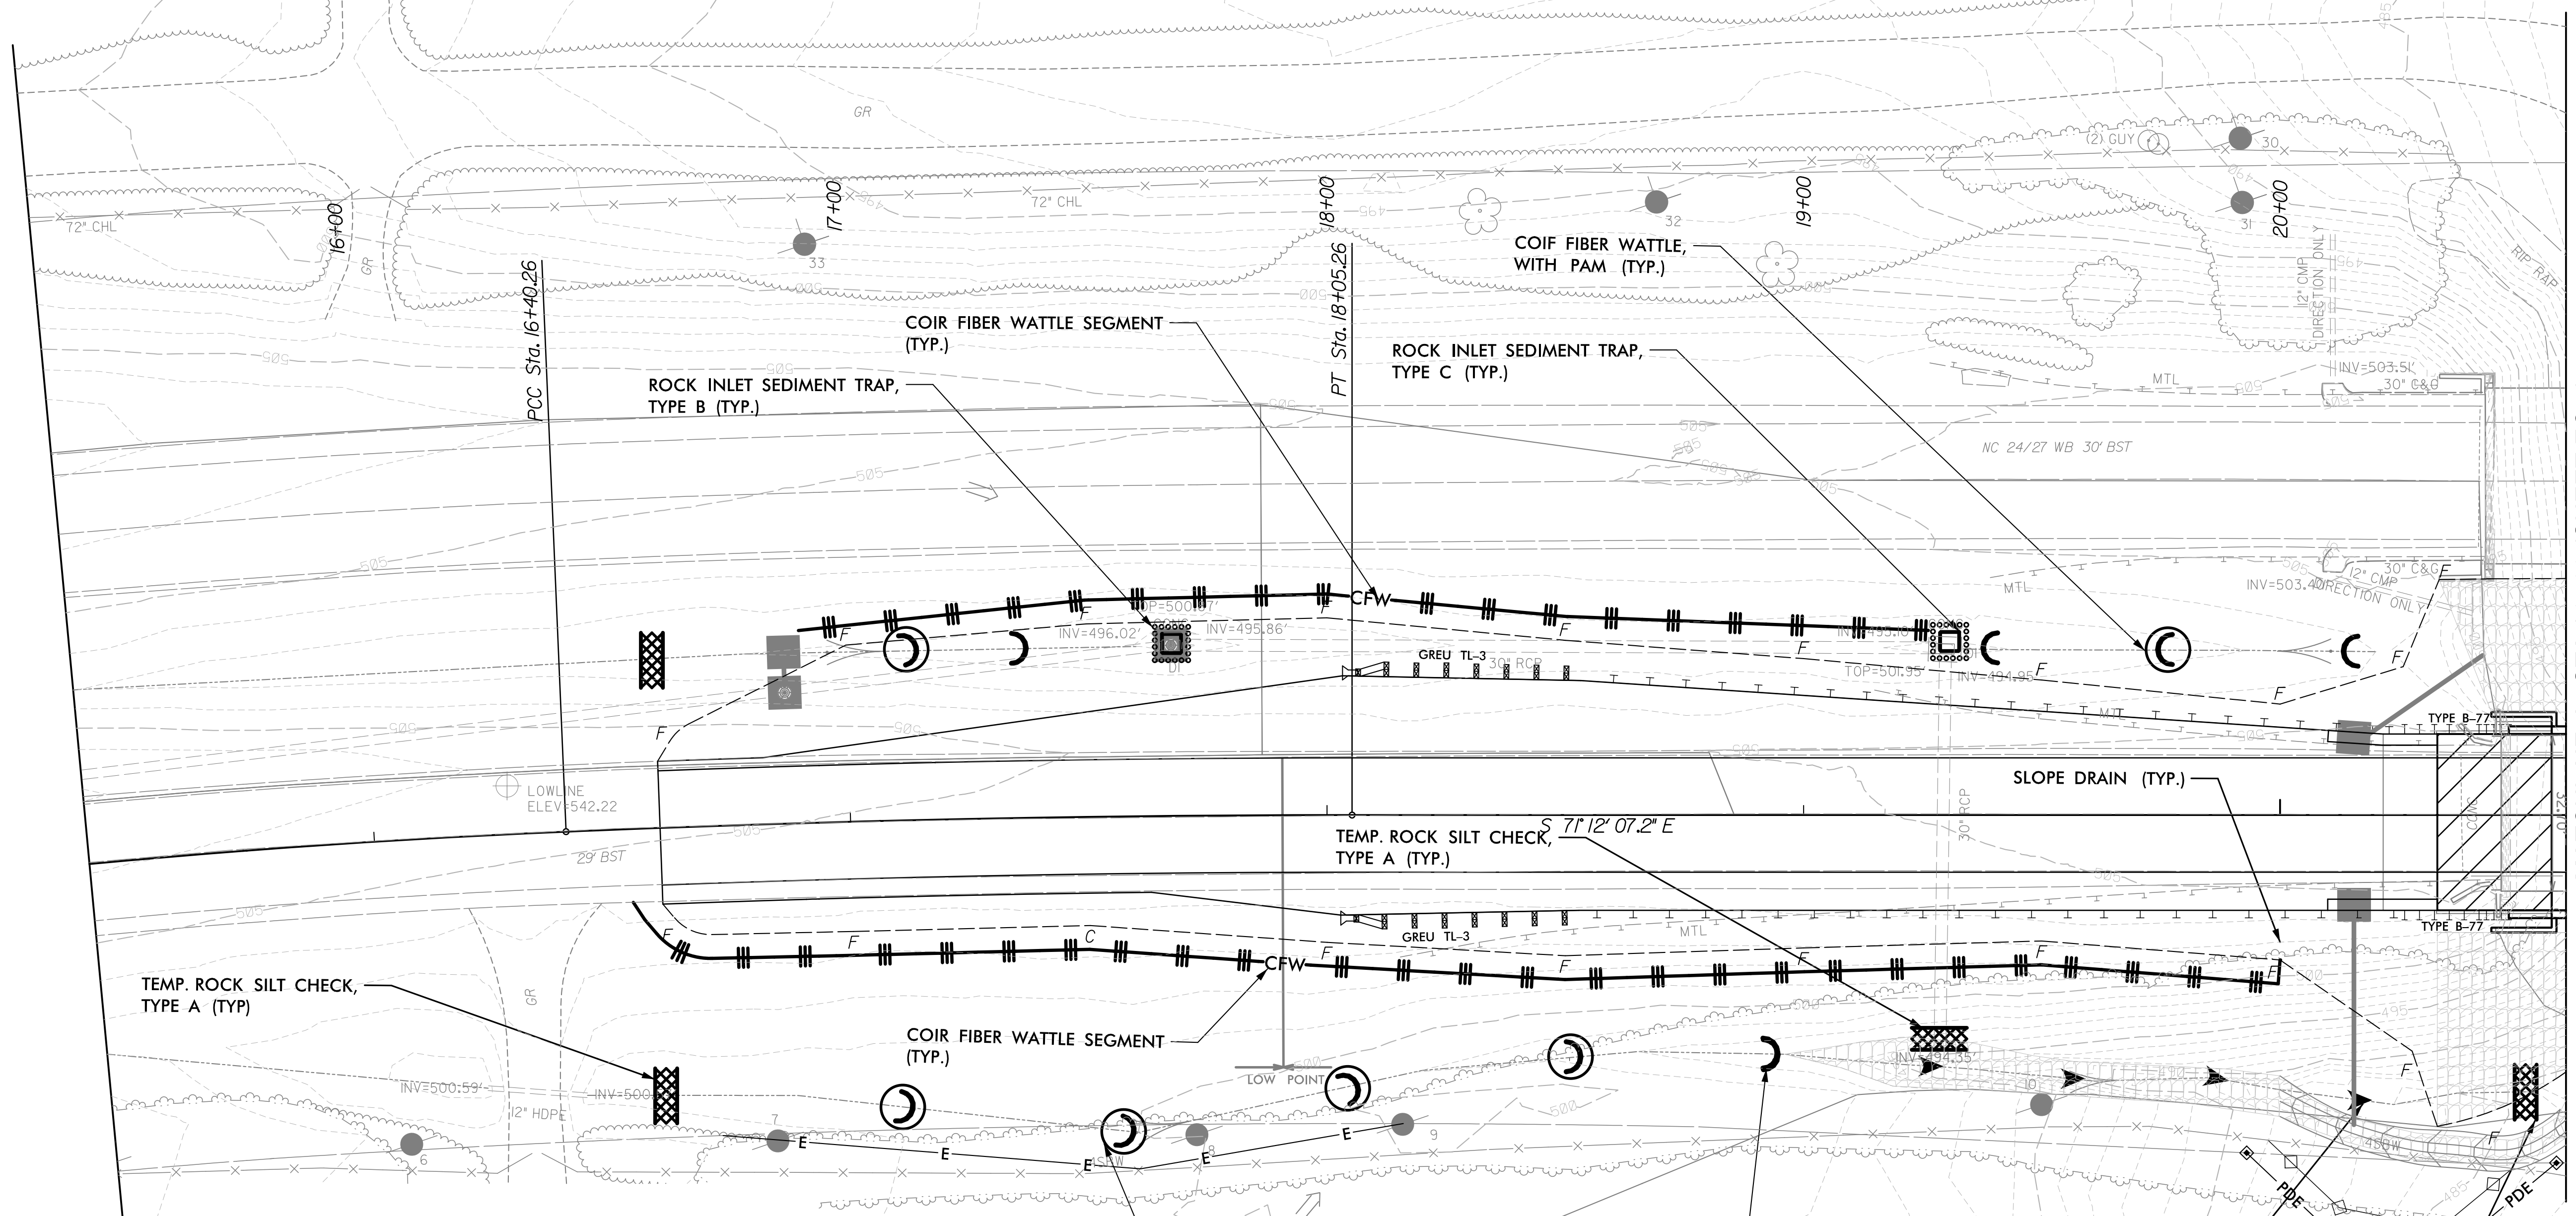


CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 5

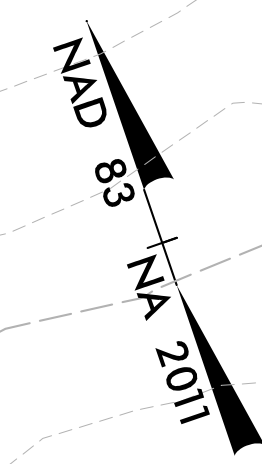

NOTE:
THE DITCH LINE WORK SHOULD BE DONE IN A
CONTINUOUS MANNER AND IMMEDIATELY STABILIZED
WITH RIP-RAP

NOTE:
PERIMETER EROSION CONTROL MEASURES SHALL BE
INSTALLED DURING CLEARING AND GRUBBING PHASE.

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B
AND TEMPORARY ROCK SILT CHECKS TYPE - A AT
DRAINAGE OUTLETS.

MATCHLINE - L- STA 20+60 (SHEET EC-5)