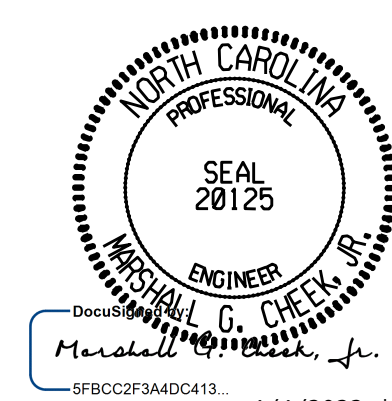



TOTAL BILL OF MATERIAL																						
	CONSTRUCTION, MAINTENANCE, AND REMOVAL OF TEMPORARY ACCESS	REMOVAL OF EXISTING STRUCTURE	ASBESTOS ASSESSMENT	4'-6" Ø DRILLED PIERS IN SOIL	PERMANENT STEEL CASING FOR 4'-6" Ø DRILLED PIERS	PDA TESTING	SID INSPECTIONS	SPT TESTING	CSL TESTING	UNCLASSIFIED STRUCTURE EXCAVATION	REINFORCED CONCRETE DECK SLAB	GROOVING BRIDGE FLOORS	CLASS A CONCRETE	BRIDGE APPROACH SLABS	REINFORCING STEEL	SPIRAL COLUMN REINFORCING STEEL	45" PRESTRESSED CONCRETE GIRDERS	PILE DRIVING EQUIPMENT SETUP FOR HP 12 X 53 STEEL PILES	HP 12 X 53 STEEL PILES	PILE REDRIVES		
	LUMP SUM	LUMP SUM	LUMP SUM	LIN. FT.	LIN. FT.	EACH	EACH	EACH	EACH	LUMP SUM	SO. FT.	SO. FT.	CU. YD.	LUMP SUM	LBS.	LBS.	NO.	LIN. FT.	EACH	NO.	LIN. FT.	
SUPERSTR.	LUMP SUM	LUMP SUM	LUMP SUM								22,585	20,835		LUMP SUM			40	2700.83				
END BENT 1										LUMP SUM					6,387				10	10	750	5
BENT 1				281.00											29,048	9,474						
BENT 2				276.25	96.03										29,494	9,696						
BENT 3				279.25	84.09										29,717	9,768						
BENT 4				279.00	90.00										29,717	9,791						
BENT 5				273.25	87.06										29,335	9,590						
BENT 6				273.00	83.97										29,287	9,590						
BENT 7				304.50											29,988	9,840						
END BENT 2										LUMP SUM					7,057				9	9	675	5
TOTAL	LUMP SUM	LUMP SUM	LUMP SUM	1966.25	441.15	2	7	7	7	LUMP SUM	22,585	20,835	482.1	LUMP SUM	220,030	67,749	40	2700.83	19	19	1425	10

TOTAL BILL OF MATERIAL							
	CONCRETE BARRIER RAIL	CLASS II RIP RAP (2'-0" THICK)	GEOTEXTILE FOR DRAINAGE	ELASTOMERIC BEARINGS	EXPANSION JOINT SEALS	THERMAL INTEGRITY PROFILER TESTING	ELECTRICAL CONDUIT SYSTEM FOR SIGNALS
	LIN. FT.	TONS	SO. YD.	LUMP SUM	LUMP SUM	EACH	LUMP SUM
SUPERSTR.	1136.77			LUMP SUM	LUMP SUM		LUMP SUM
END BENT 1		170	190				
BENT 1						1	
BENT 2						1	
BENT 3						1	
BENT 4						1	
BENT 5						1	
BENT 6						1	
BENT 7						1	
END BENT 2		160	180				
TOTAL	1136.77	330	370	LUMP SUM	LUMP SUM	7	LUMP SUM

PROJECT NO. B-4786  
PITT COUNTY  
STATION: 28+03.00 -L-

SHEET 6 OF 6

 <small>4/4/2022 10:27 AM EDT</small>	STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION RALEIGH	
	GENERAL DRAWING FOR BRIDGE ON US 13 OVER TAR RIVER BETWEEN NC 43 AND SR 1530	
<small>DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED</small>  <b>TGS ENGINEERS</b> 706 HILLSBOROUGH STREET SUITE 200 RALEIGH, NC 27603 PH (919) 773-8887 CORP. LICENSE NO.: C-0275	REVISIONS	SHEET NO. <b>S-6</b> TOTAL SHEETS <b>57</b>
NO. BY: DATE: NO. BY: DATE:	1 3 2 4	

DRAWN BY: STM DATE: 06/19  
CHECKED BY: MGC DATE: 07/19  
DESIGN ENGINEER OF RECORD: MGC DATE: 07/19