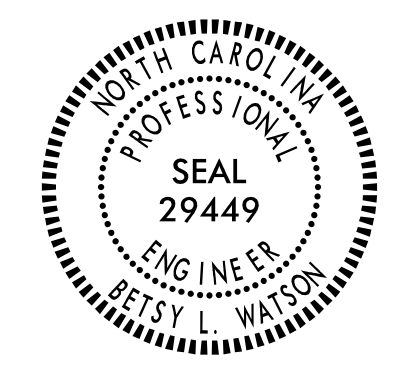


PROJECT NAME	SHEET NO.
B-4442	SIGN-1
APPROVED: <i>Betsy L. Watson</i>	
DATE: 6/24/2022	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

**STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION**

**SIGNING PLAN
BUNCOMBE COUNTY**

**LOCATION: REPLACE US-19, US-23, US-25, US-70, FUTURE I-26
BRIDGES OVER REEMS CREEK- STRUCTURES NO. 370 AND 373**

CONTRACT NO. C204740 TIP PROJECT: B-4442

ROADWAY STANDARD DRAWINGS

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2018 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
901.10	TYPE 'A' SIGNS
901.20	TYPE 'B' SIGNS
901.50	ARROWS AND SHIELDS
901.70	SIGN STRINGERS AND SUPPORT SPACING
901.80	SIGN MOUNTING DETAILS
903.10	GROUND MOUNTED SIGN SUPPORTS
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.20	SECONDARY SIGN MOUNTING
904.30	SUPPLEMENTAL SIGN MOUNTING
904.40	MILEPOST AND PLACEMENT
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS

GENERAL NOTES


- . SIGNS FURNISHED BY STATE.
- . CONFIRM IN WRITING AT LEAST 4 MONTHS IN ADVANCE, THE ACTUAL DATE THE DEPARTMENT FURNISHED SIGNS WILL BE REQUIRED.
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- . WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- . DO NOT BEGIN FABRICATION FOR TYPES A & B SIGNS MOUNTED ON OVERHEAD STRUCTURES OR STEEL SUPPORTS UNTIL 'S' DIMENSIONS HAVE BEEN FIELD VERIFIED.
- . SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

SUMMARY OF QUANTITIES

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4048000000	902	REINFORCED CONCRETE SIGN FOUNDATIONS.....	4	CY
4057000000	SP	OVERHEAD FOOTING.....	29	CY
4060000000	903	SUPPORTS, BREAKAWAY STEEL BEAM.....	3,481	LB
4072000000	903	SUPPORTS, 3-LB STEEL U-CHANNEL.....	100	LF
4082100000	906	SUPPORTS, OVERHEAD SIGN STRUCTURE AT -L- STA 320+00.....	1	LS
4096000000	904	SIGN ERECTION, TYPE D.....	3	EA
4114000000	904	SIGN ERECTION, MILEMARKERS.....	2	EA
4116100000	904	SIGN ERECTION, RELOCATE TYPE A (GROUND MOUNTED).....	4	EA
4138000000	907	DISPOSAL OF SUPPORT, STEEL BEAM.....	8	EA
4152000000	907	DISPOSAL OF SIGN SYSTEM, STEEL BEAM.....	2	EA
4155000000	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL.....	4	EA

INDEX

SHEET NO.	DESCRIPTION
SIGN-1	TITLE SHEET
SIGN-2	SIGN SUPPORT DESIGN
SIGN-3	OVERHEAD SIGN STRUCTURE
SIGN-4-4A	TYPE 'A' & 'B' OVERHEAD SIGN DESIGNS
SIGN-4B	TYPE 'D' SIGN DESIGNS & MILEMARKERS
SIGN-5-8	SIGNING PLAN SHEETS

PLAN PREPARED BY:	 <small>Stantec Consulting Services Inc. 801 Jones Franklin Road Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</small>
BETSY L. WATSON, P.E. SENIOR TRANSPORTATION ENGINEER	
ROSI R. HENNEIN TRANSPORTATION DESIGNER	

\$\$\$\$SYTIME\$\$\$\$
\$\$\$DGN\$\$\$\$
\$\$\$USERNAME\$\$\$\$