


TOTAL BILL OF MATERIAL																	
BRIDGE NO.	GROOVING BRIDGE FLOORS	POLLUTION CONTROL	CLASS II SURFACE PREPARATION	RIP RAP CLASS B	GEOTEXTILE FOR DRAINAGE	CONCRETE REPAIRS	SHOTCRETE REPAIRS	EPOXY RESIN INJECTION	CLEANING & REPAINTING OF BRIDGE NO. -----	PAINTING CONTAINMENT FOR BRIDGE NO. -----	FOAM JOINT SEALS FOR PRESERVATION	POURABLE SILICONE JOINT SEALANT	POLYESTER POLYMER CONCRETE MATERIALS	EPOXY POLYMER CONCRETE MATERIALS (ALTERNATE)	FLOWABLE FILL	CONCRETE REPAIRS (CLASS B)	CONCRETE MEDIAN REPLACEMENT
	SQ. FT.	LUMP SUM	SQ. YDS.	TON	SQ. YDS.	CU. FT.	CU. FT.	LIN. FT.	LUMP SUM	LUMP SUM	LIN. FT.	LIN. FT.	CU. YDS.	CU. YDS.	CU. YDS.	CU. FT.	SQ. FT.
280092	19,432.0	-	15.7	-	-	1.8	13.3	-	-	-	132.2	-	82.5	82.5	-	-	3,351.3
280137	14,766.0	LUMP SUM	25.8	-	-	8.8	206.0	2.3	LUMP SUM	LUMP SUM	159.8	66.5	62.2	62.2	-	10.0	-
280146	-	LUMP SUM	-	-	-	11.5	231.5	13.5	LUMP SUM	LUMP SUM	-	-	-	-	-	2.7	-
280147	11,336.0	LUMP SUM	16.7	-	-	17.7	0.6	23.5	LUMP SUM	LUMP SUM	-	118.8	46.5	46.5	-	-	-
280152	11,315.0	LUMP SUM	13.2	-	-	1.8	9.2	15.5	LUMP SUM	LUMP SUM	118.8	-	46.4	46.4	-	-	-
280154	15,110.0	-	12.8	585.0	650.0	-	64.2	6.0	-	-	116.0	-	63.1	63.1	-	-	-
280157	15,328.0	-	15.9	496.0	551.0	-	4.4	25.3	-	-	116.6	-	62.8	62.8	-	-	-
280170	17,853.0	-	13.5	80.0	89.0	-	5.2	106.0	-	-	116.6	-	73.0	73.0	3.0	-	-
280171	17,853.0	-	12.4	155.0	172.0	-	10.1	42.0	-	-	116.6	-	73.0	73.0	5.0	-	-
280174	16,198.0	-	11.5	-	-	0.8	11.1	-	-	-	96.0	-	62.0	62.0	-	-	1,192.0
TOTAL	139,191.0	LUMP SUM	137.5	1,316.0	1,462.0	42.4	555.6	234.1	LUMP SUM	LUMP SUM	972.6	185.3	571.5	571.5	8.0	12.7	4,543.3

TOTAL BILL OF MATERIAL CONTINUED						
BRIDGE NO.	EPOXY COATING	CONCRETE DECK REPAIR FOR POLYMER CONCRETE OVERLAY	PLACING & FINISHING POLYMER CONCRETE OVERLAY	SCARIFYING BRIDGE DECK	SHOTBLASTING BRIDGE DECK	CLEANING & PAINTING EXISTING BEARING PLATES
	SQ. FT.	SQ. YDS.	SQ. YDS.	SQ. YDS.	SQ. YDS.	EA
280092	506.0	15.7	2,378.3	2,378.3	2,378.3	20.0
280137	828.0	25.8	1,792.0	1,792.0	1,792.0	-
280146	565.0	-	-	-	-	-
280147	1292.7	16.7	1,340.0	1,340.0	1,340.0	-
280152	1293.6	13.2	1,338.0	1,338.0	1,338.0	-
280154	1265.9	12.8	1,816.2	1,816.2	1,816.2	16.0
280157	1304.0	15.9	1,798.0	1,798.0	1,798.0	16.0
280170	536.8	13.5	2,102.2	2,102.2	2,102.2	16.0
280171	536.8	12.4	2,102.2	2,102.2	2,102.2	16.0
280174	937.8	11.5	1,788.2	1,788.2	1,788.2	16.0
TOTAL	9,066.6	137.5	16,455.1	16,455.1	16,455.1	100.0

PROJECT NO. I-5950
DAVIDSON COUNTY
BRIDGE NO. 280092, 280137, 280146
280147, 280152, 280154
280157, 280170, 280171, 280174

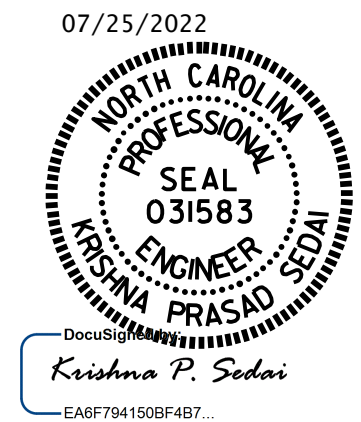

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH
TOTAL BILL OF MATERIAL

DRAWN BY : E. BAYISSA DATE : 05/2022
CHECKED BY : A. SORSENGINH DATE : 05/2022

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-1
1			3			TOTAL SHEETS
2			4			1