

**AS-BUILT REPAIR QUANTITY TABLE**

DECK UNDERSIDE REPAIRS SPAN C	QUANTITIES		
	ESTIMATE		
SHOTCRETE REPAIRS	AREA SF	VOLUME CF	AREA SF
UNDERSIDE OF DECK	0.0	0.0	
CONCRETE DIAPHRAGM	0.0	0.0	
OVERHANG	0.0	0.0	
<b>CONCRETE REPAIRS</b>	<b>AREA SF</b>	<b>VOLUME CF</b>	<b>AREA SF</b>
UNDERSIDE OF DECK	0.0	0.0	
CONCRETE DIAPHRAGM	0.0	0.0	
OVERHANG	0.0	0.0	
<b>EPOXY RESIN INJECTION</b>		<b>LIN. FT.</b>	
UNDERSIDE OF DECK		0.0	
CONCRETE DIAPHRAGM		0.0	
OVERHANG		0.0	

VALUES IN CHART REPRESENT ESTIMATED REPAIR TOTALS AFTER REMOVAL OF UNSOUND CONCRETE, MIN. OF 1" BEHIND REBAR AND MIN. 2" CLEAR TO SAWCUT. SEE REPAIR DETAILS.

**NOTES**

REPAIR LOCATIONS AND ESTIMATE OF QUANTITIES ARE GIVEN BASED ON THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER SHALL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATION AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE AS-BUILT REPAIR QUANTITY TABLE.

CONTRACTOR SHALL SAW CUT TO A NOMINAL DEPTH OF 1/2" BUT REINFORCING STEEL SHALL NOT BE DAMAGED.

CONTRACTOR SHALL REMOVE SURFACE CONCRETE TO VERIFY THAT SAWCUT DEPTH WILL NOT DAMAGE EXISTING REINFORCING STEEL.


SHOTCRETE REPAIRS MAYBE SUBSTITUTED IN LIEU OF CONCRETE REPAIRS WITH THE APPROVAL OF THE ENGINEER.

FOR UNDERSIDE OF DECK REPAIRS, SEE "OVERHANG, DIAPHRAGM AND BRIDGE RAIL REPAIR DETAILS" SHEET.


FOR SHOTCRETE REPAIRS, SEE SPECIAL PROVISIONS.

FOR CONCRETE REPAIRS, SEE SPECIAL PROVISIONS.

FOR EPOXY RESIN INJECTION, SEE SPECIAL PROVISIONS.




SHOTCRETE REPAIR AREA



CONCRETE REPAIR AREA

PROJECT NO. **I-5950**  
**DAVIDSON** COUNTY  
 BRIDGE NO. **280152**

SHEET 3 OF 3

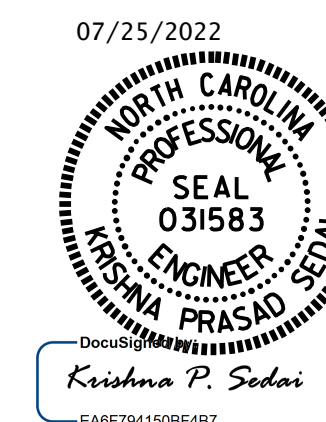

STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH

**DECK UNDERSIDE REPAIR  
 SPAN C**

REVISIONS					SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:
1			3		
2			4		

TOTAL SHEETS: 14

DOCUMENT NOT CONSIDERED  
 FINAL UNLESS ALL  
 SIGNATURES COMPLETED

DRAWN BY : M. G. SHAIKH DATE : 09/2021  
 CHECKED BY : E. BAYISSA DATE : 03/2022