

NOTES

GENERAL DRAWING INFORMATION IS TAKEN FROM THE ORIGINAL PLANS AND THE ROUTINE INSPECTION REPORT DATED 05/08/2022.



BRIDGE ORIENTATION CONFORMS TO THE ORIGINAL BRIDGE PLANS/ROUTINE INSPECTION.

SCOPE OF WORK

- PARTIALLY REMOVE TOP OF BRIDGE DECK CONCRETE BY SCARIFICATION AND SHOTBLASTING METHODS.
- OVERLAY PREPARED TOP OF BRIDGE DECK WITH POLYMER CONCRETE (PC).
- REMOVE EXISTING JOINT MATERIALS AND INSTALL FOAM JOINT SEALS FOR PRESERVATION.
- GROOVE PC BRIDGE DECK.
- CLEAN AND PAINT EXISTING STEEL BEARINGS AT END BENTS.
- REMOVE DEBRIS FROM TOP OF EXISTING END BENT CAPS AND APPLY EPOXY COATING.
- EPOXY RESIN INJECTION OF CONCRETE CRACKS.
- REMOVE UNSOUND CONCRETE AND PROPERLY PREPARE EXISTING END BENT AND BENT AREAS FOR SHOTCRETE AND CONCRETE REPAIRS.
- PROPERLY PREPARE SPALLED AREAS IN EXISTING END BENTS AND BENTS AND PERFORM SHOTCRETE AND CONCRETE REPAIRS.
- PLACE RIP RAP AND FLOWABLE FILL FOR SLOPE PROTECTION.

I HEREBY CERTIFY THAT THIS STRUCTURE WAS REHABILITATED ACCORDING TO THESE PLANS OR AS NOTED HEREIN.

RESIDENT ENGINEER _____ DATE _____

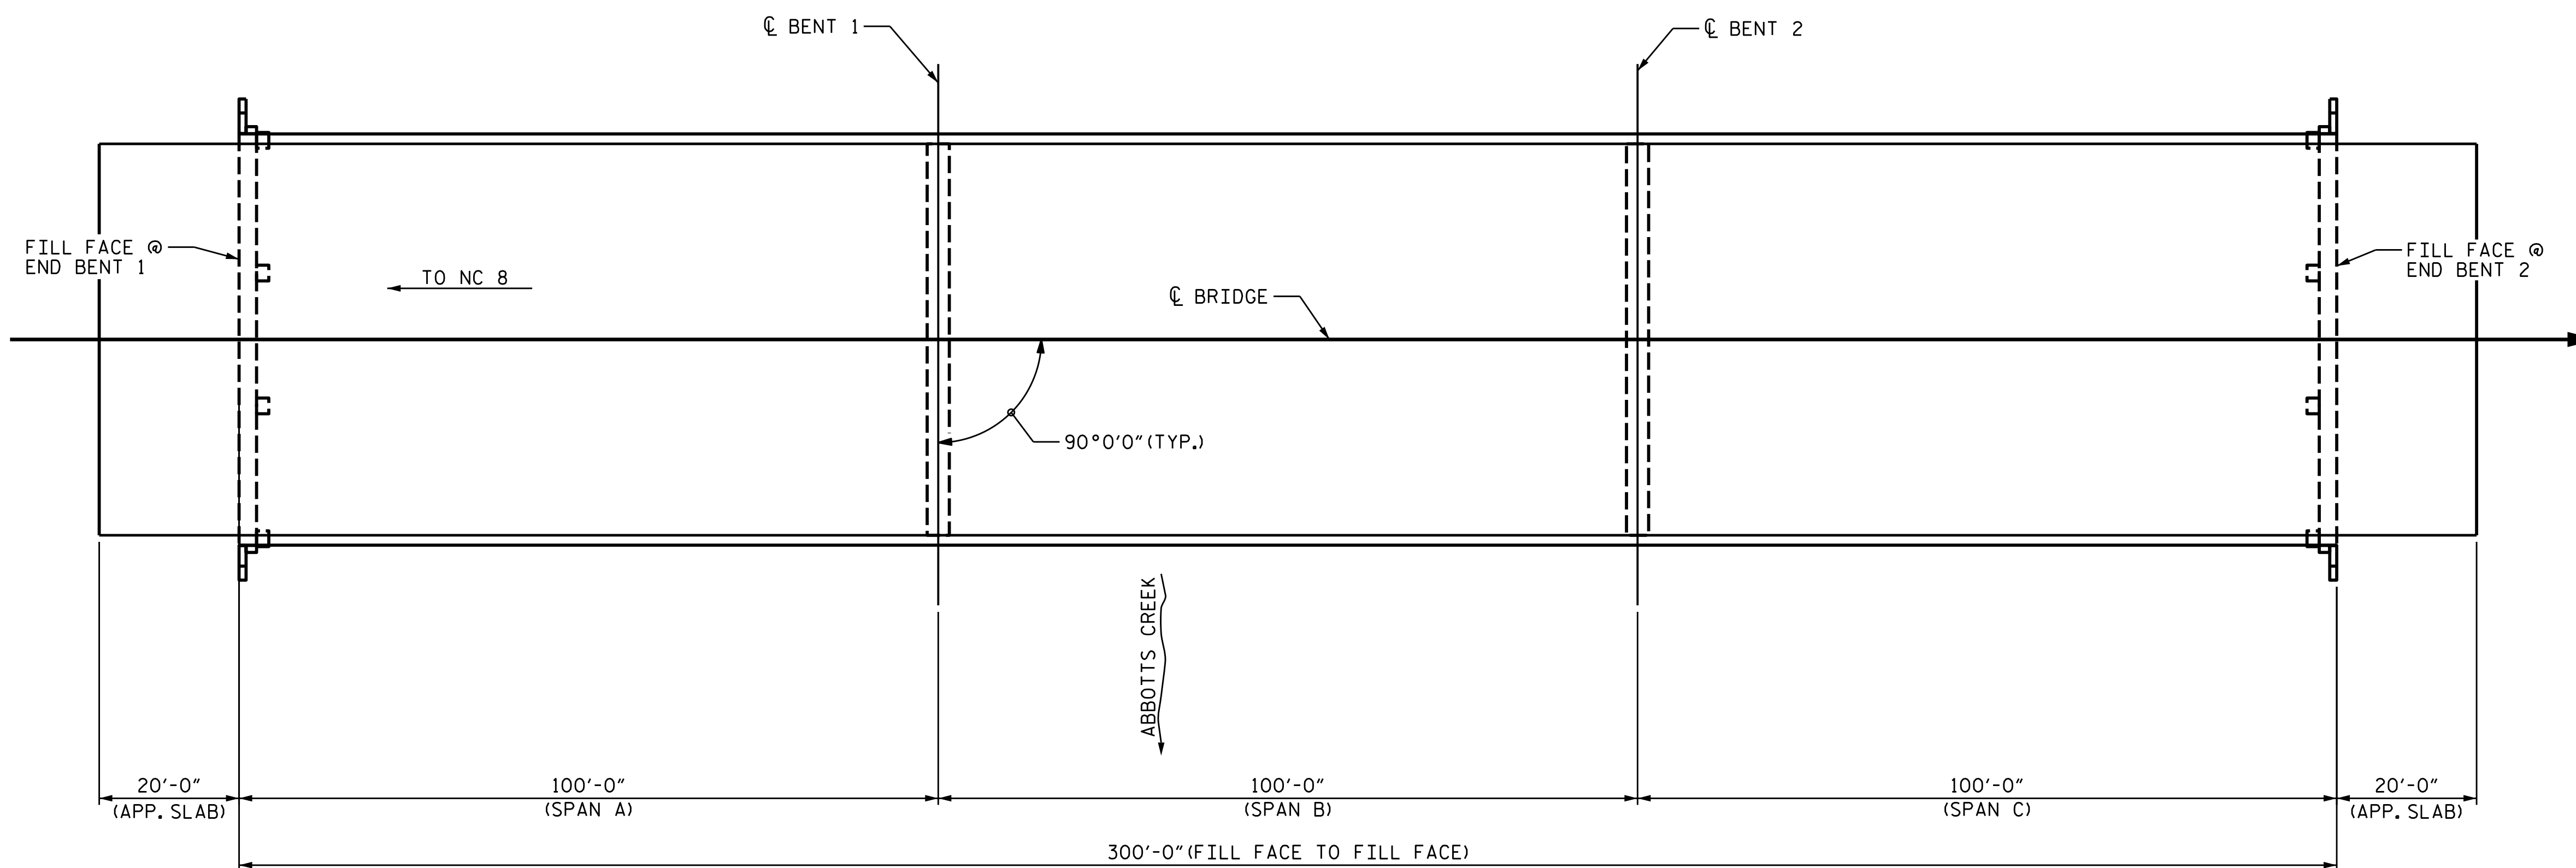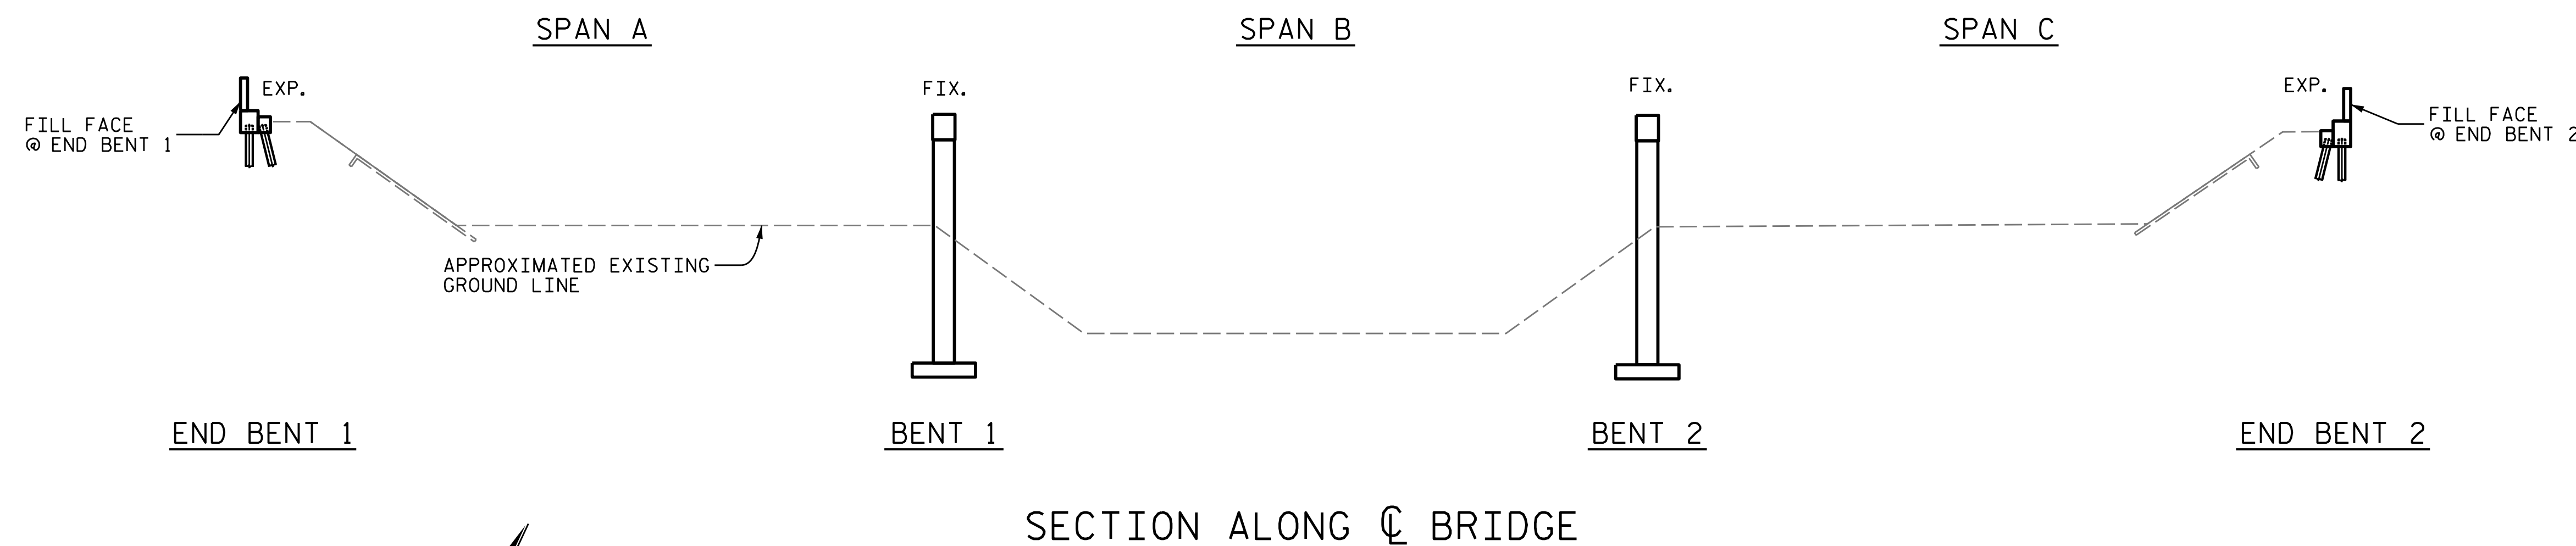

PLAN



PROJECT NO. I-5950
DAVIDSON COUNTY
 BRIDGE NO. 280171

SHEET 1 OF 2

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

GENERAL DRAWING

FOR BRIDGE ON I85-S
 OVER ABBOTTS CREEK

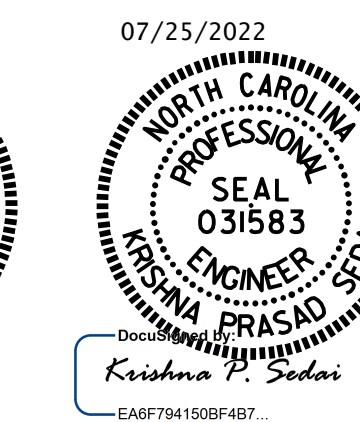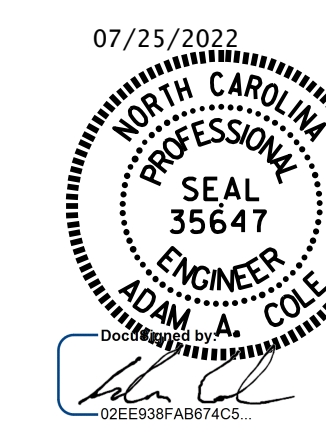

DRAWN BY : C. RUIZ DATE : 09/2020
 CHECKED BY : E. BAYISSA/H.A. LOCKLEAR DATE : 04/2022

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S9-01
1			3			TOTAL SHEETS
2			4			15