

# AS-BUILT REPAIR QUANTITY TABLE

## UNDERSIDE OF DECK REPAIRS - SPAN C

	ESTIMATE		ACTUAL	
	AREA SQ. FT.	VOLUME CU. FT.	AREA SQ. FT.	VOLUME CU. FT.
<b>SHOTCRETE REPAIRS</b>				
UNDERSIDE OF DECK	0.0	0.0		
BENT DIAPHRAGM	0.0	0.0		
OVERHANG	0.0	0.0		
<b>CONCRETE REPAIRS</b>				
UNDERSIDE OF DECK	0.0	0.0		
BENT DIAPHRAGM	0.0	0.0		
OVERHANG	0.0	0.0		
<b>EPOXY RESIN INJECTION</b>		LIN. FT.		LIN. FT.
UNDERSIDE OF DECK		0.0		
BENT DIAPHRAGM		0.0		
OVERHANG		0.0		

VALUES IN CHART REPRESENT ESTIMATED REPAIR TOTALS AFTER REMOVAL OF UNSOUND CONCRETE, MINIMUM OF 1" BEHIND REBAR AND MINIMUM 2" CLEARANCE TO SAWCUT. SEE "OVERHANG, DIAPHRAGM AND BRIDGE RAIL REPAIR DETAILS" SHEET.

### NOTES

REPAIR LOCATIONS AND ESTIMATE OF QUANTITIES ARE GIVEN BASED ON THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER SHALL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATION AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE AS-BUILT REPAIR QUANTITY TABLE.

THE CONTRACTOR SHALL SAW CUT TO A NOMINAL DEPTH OF 1/2" BUT REINFORCING STEEL SHALL NOT BE DAMAGED.



CONTRACTOR SHALL REMOVE SURFACE CONCRETE TO VERIFY THAT SAWCUT DEPTH WILL NOT DAMAGE EXISTING REINFORCING STEEL.


SHOTCRETE REPAIRS MAYBE SUBSTITUTED IN LIEU OF CONCRETE REPAIRS WITH THE APPROVAL OF THE ENGINEER.

FOR UNDERSIDE DECK REPAIR, SEE "OVERHANG, DIAPHRAGM AND BRIDGE RAIL REPAIR DETAILS" SHEET.

FOR SHOTCRETE REPAIRS, SEE SPECIAL PROVISIONS.

FOR CONCRETE REPAIRS, SEE SPECIAL PROVISIONS.


- (B1) BEAM NUMBER
-  SHOTCRETE REPAIR AREA
-  EPOXY RESIN INJECTION (ERI)

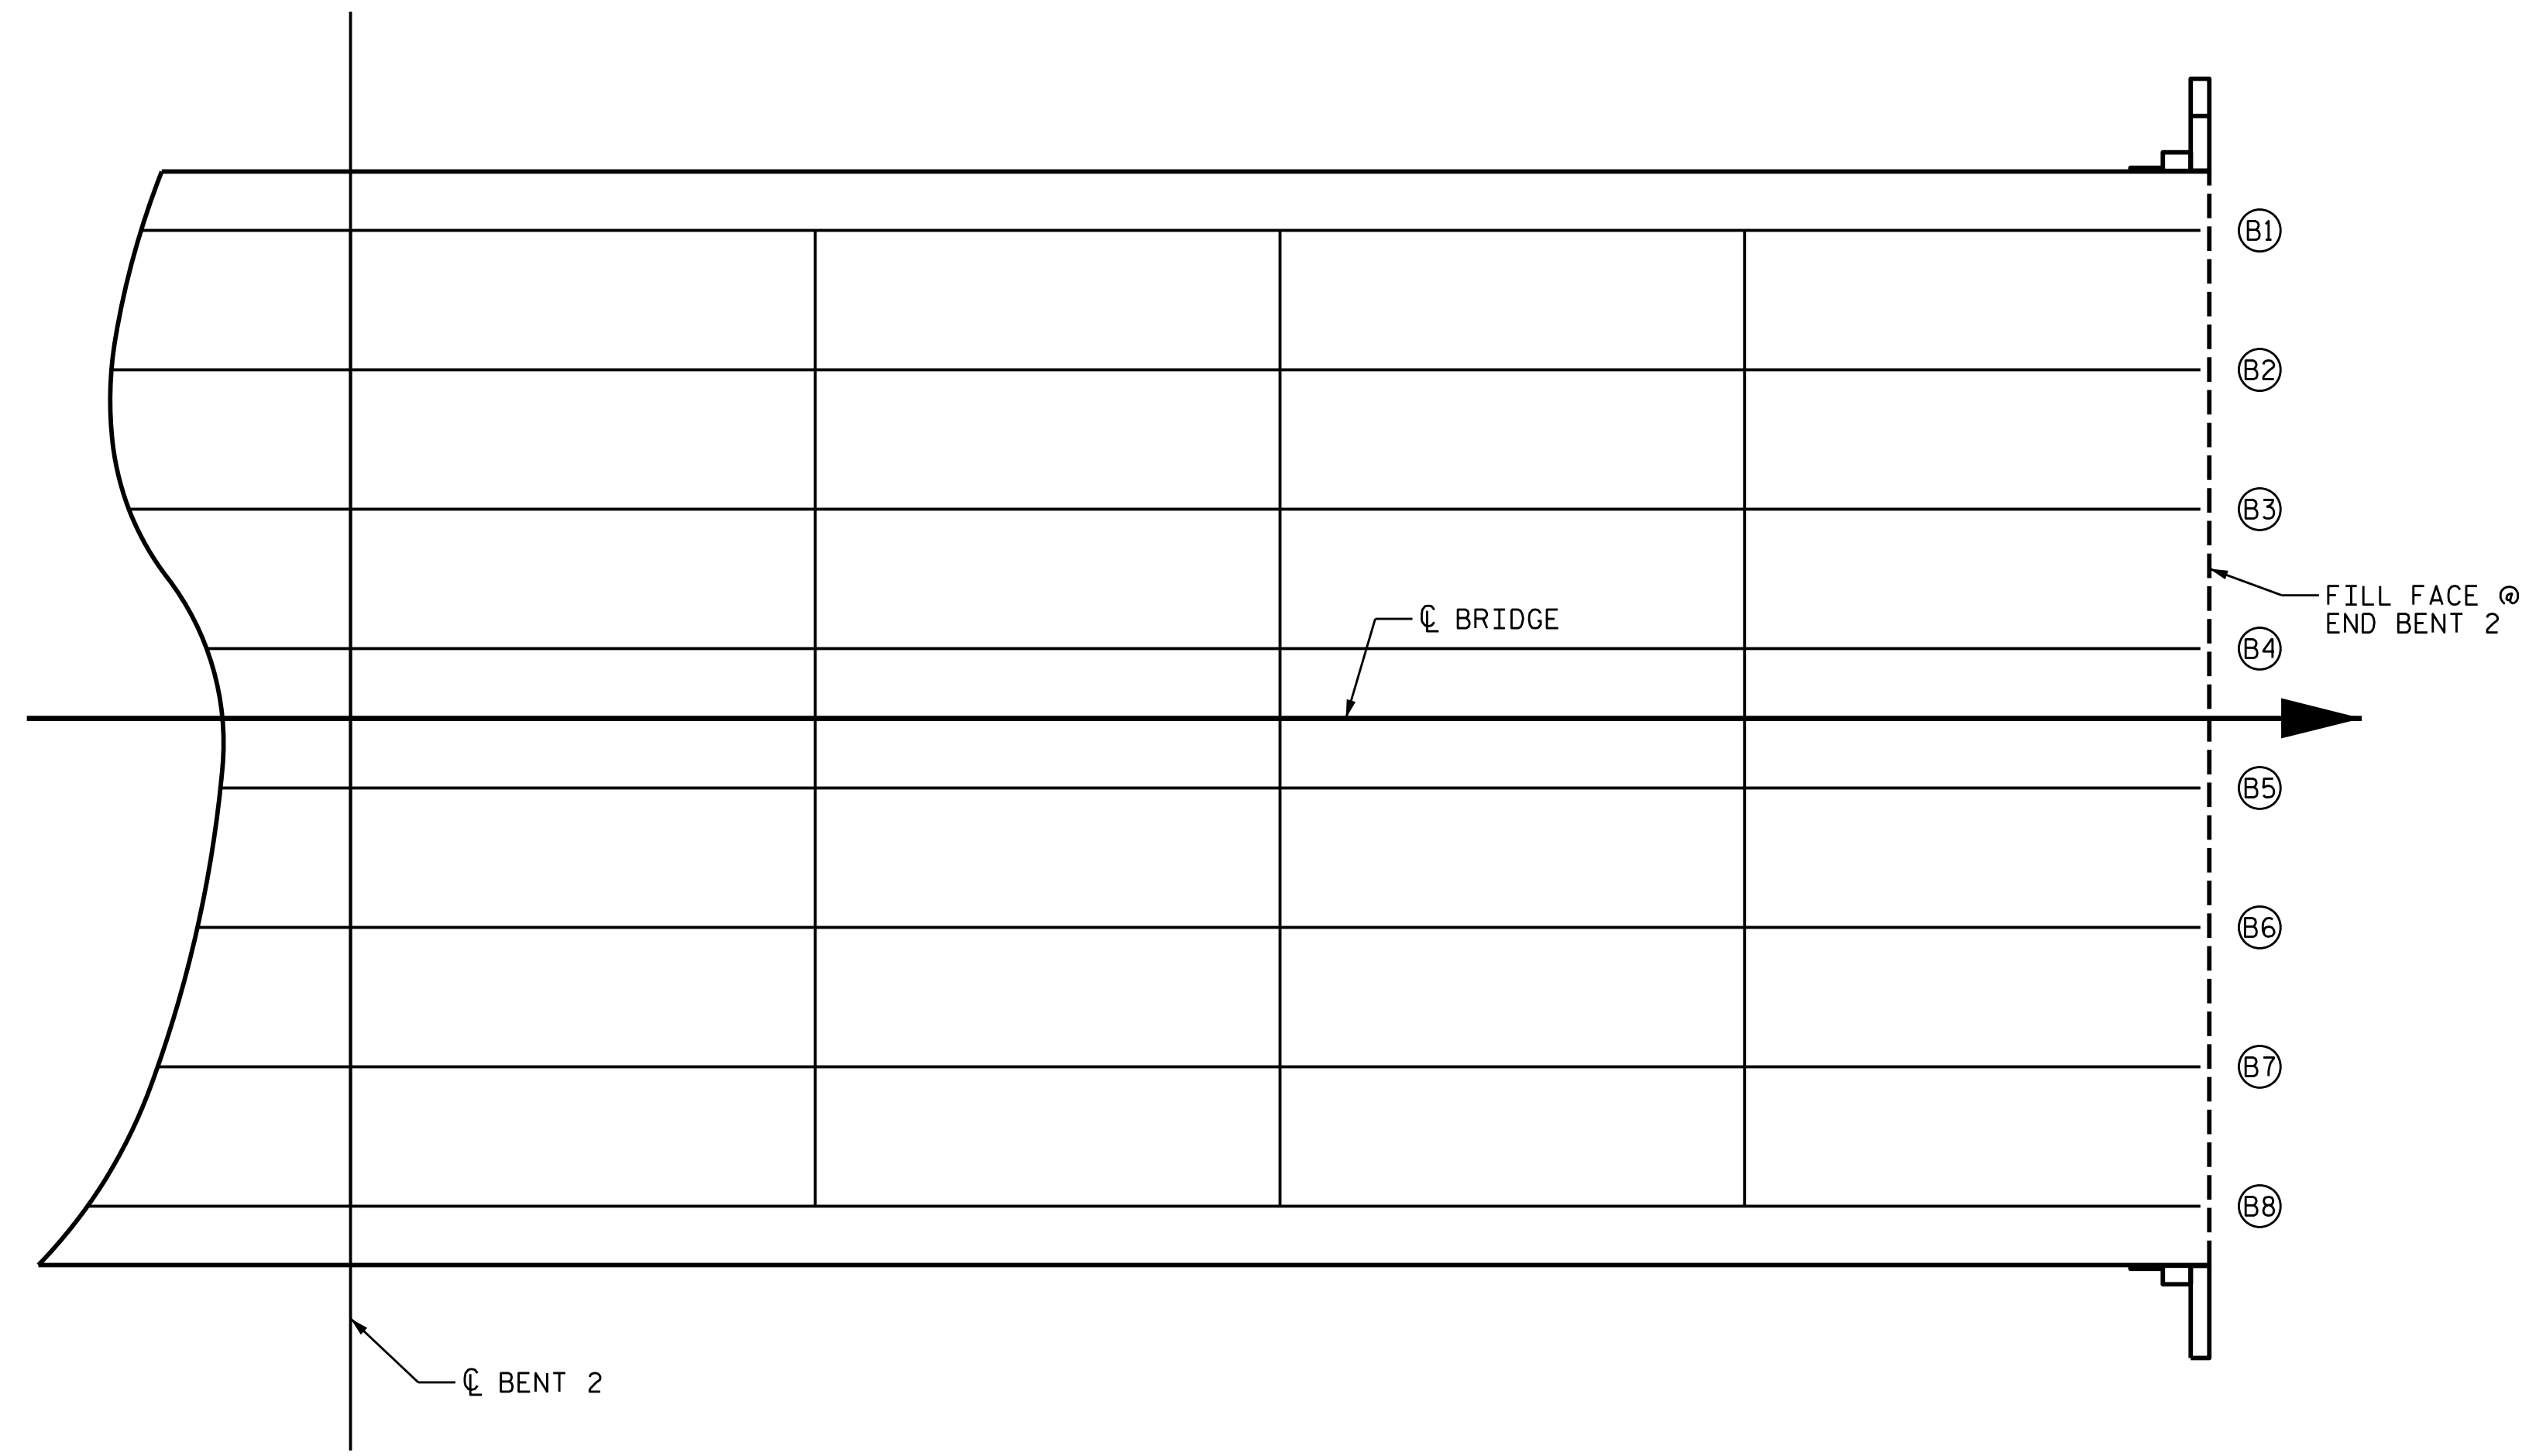

SPAN C

PROJECT NO. I-5950  
DAVIDSON COUNTY  
 BRIDGE NO. 280171

SHEET 3 OF 3

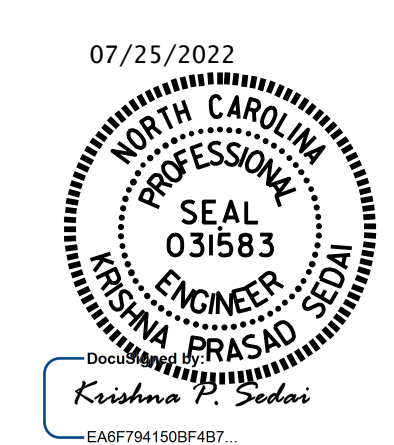

STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH  
**DECK UNDERSIDE  
 REPAIR  
 SPAN C**

DRAWN BY : CRUIZ DATE : 09/2021  
 CHECKED BY : H.A. LOCKLEAR DATE : 04/2022

NO.	REVISIONS			NO.	REVISIONS			SHEET NO.
	BY:	DATE:			BY:	DATE:		
1				3			99-08	
2				4			TOTAL SHEETS 15	

DOCUMENT NOT CONSIDERED  
 FINAL UNLESS ALL  
 SIGNATURES COMPLETED