

TIP PROJECT: I-5973

CONTRACT: C204658


INDEX OF SHEETS

Cover Sheet.....	SIG2.0
Temp 1 Signal Plans	SIG2.1
Temp 1 Signal Details	SIG2.2
Temp 2 Signal Plans	SIG2.3
Temp 2 Signal Details	SIG2.4
Final Signal Plans	SIG2.5
Final Signal Details	SIG2.6
Splice Detail	SIG2.7
Utility/Metal Pole Detail.....	SIG2.8

TOTAL SHEETS 9



Signal Plans of
BROOKSHIRE BLVD. @ I-485 OUTER RAMP
 CDOT Signal ID 000895
 NCDOT 10-1846

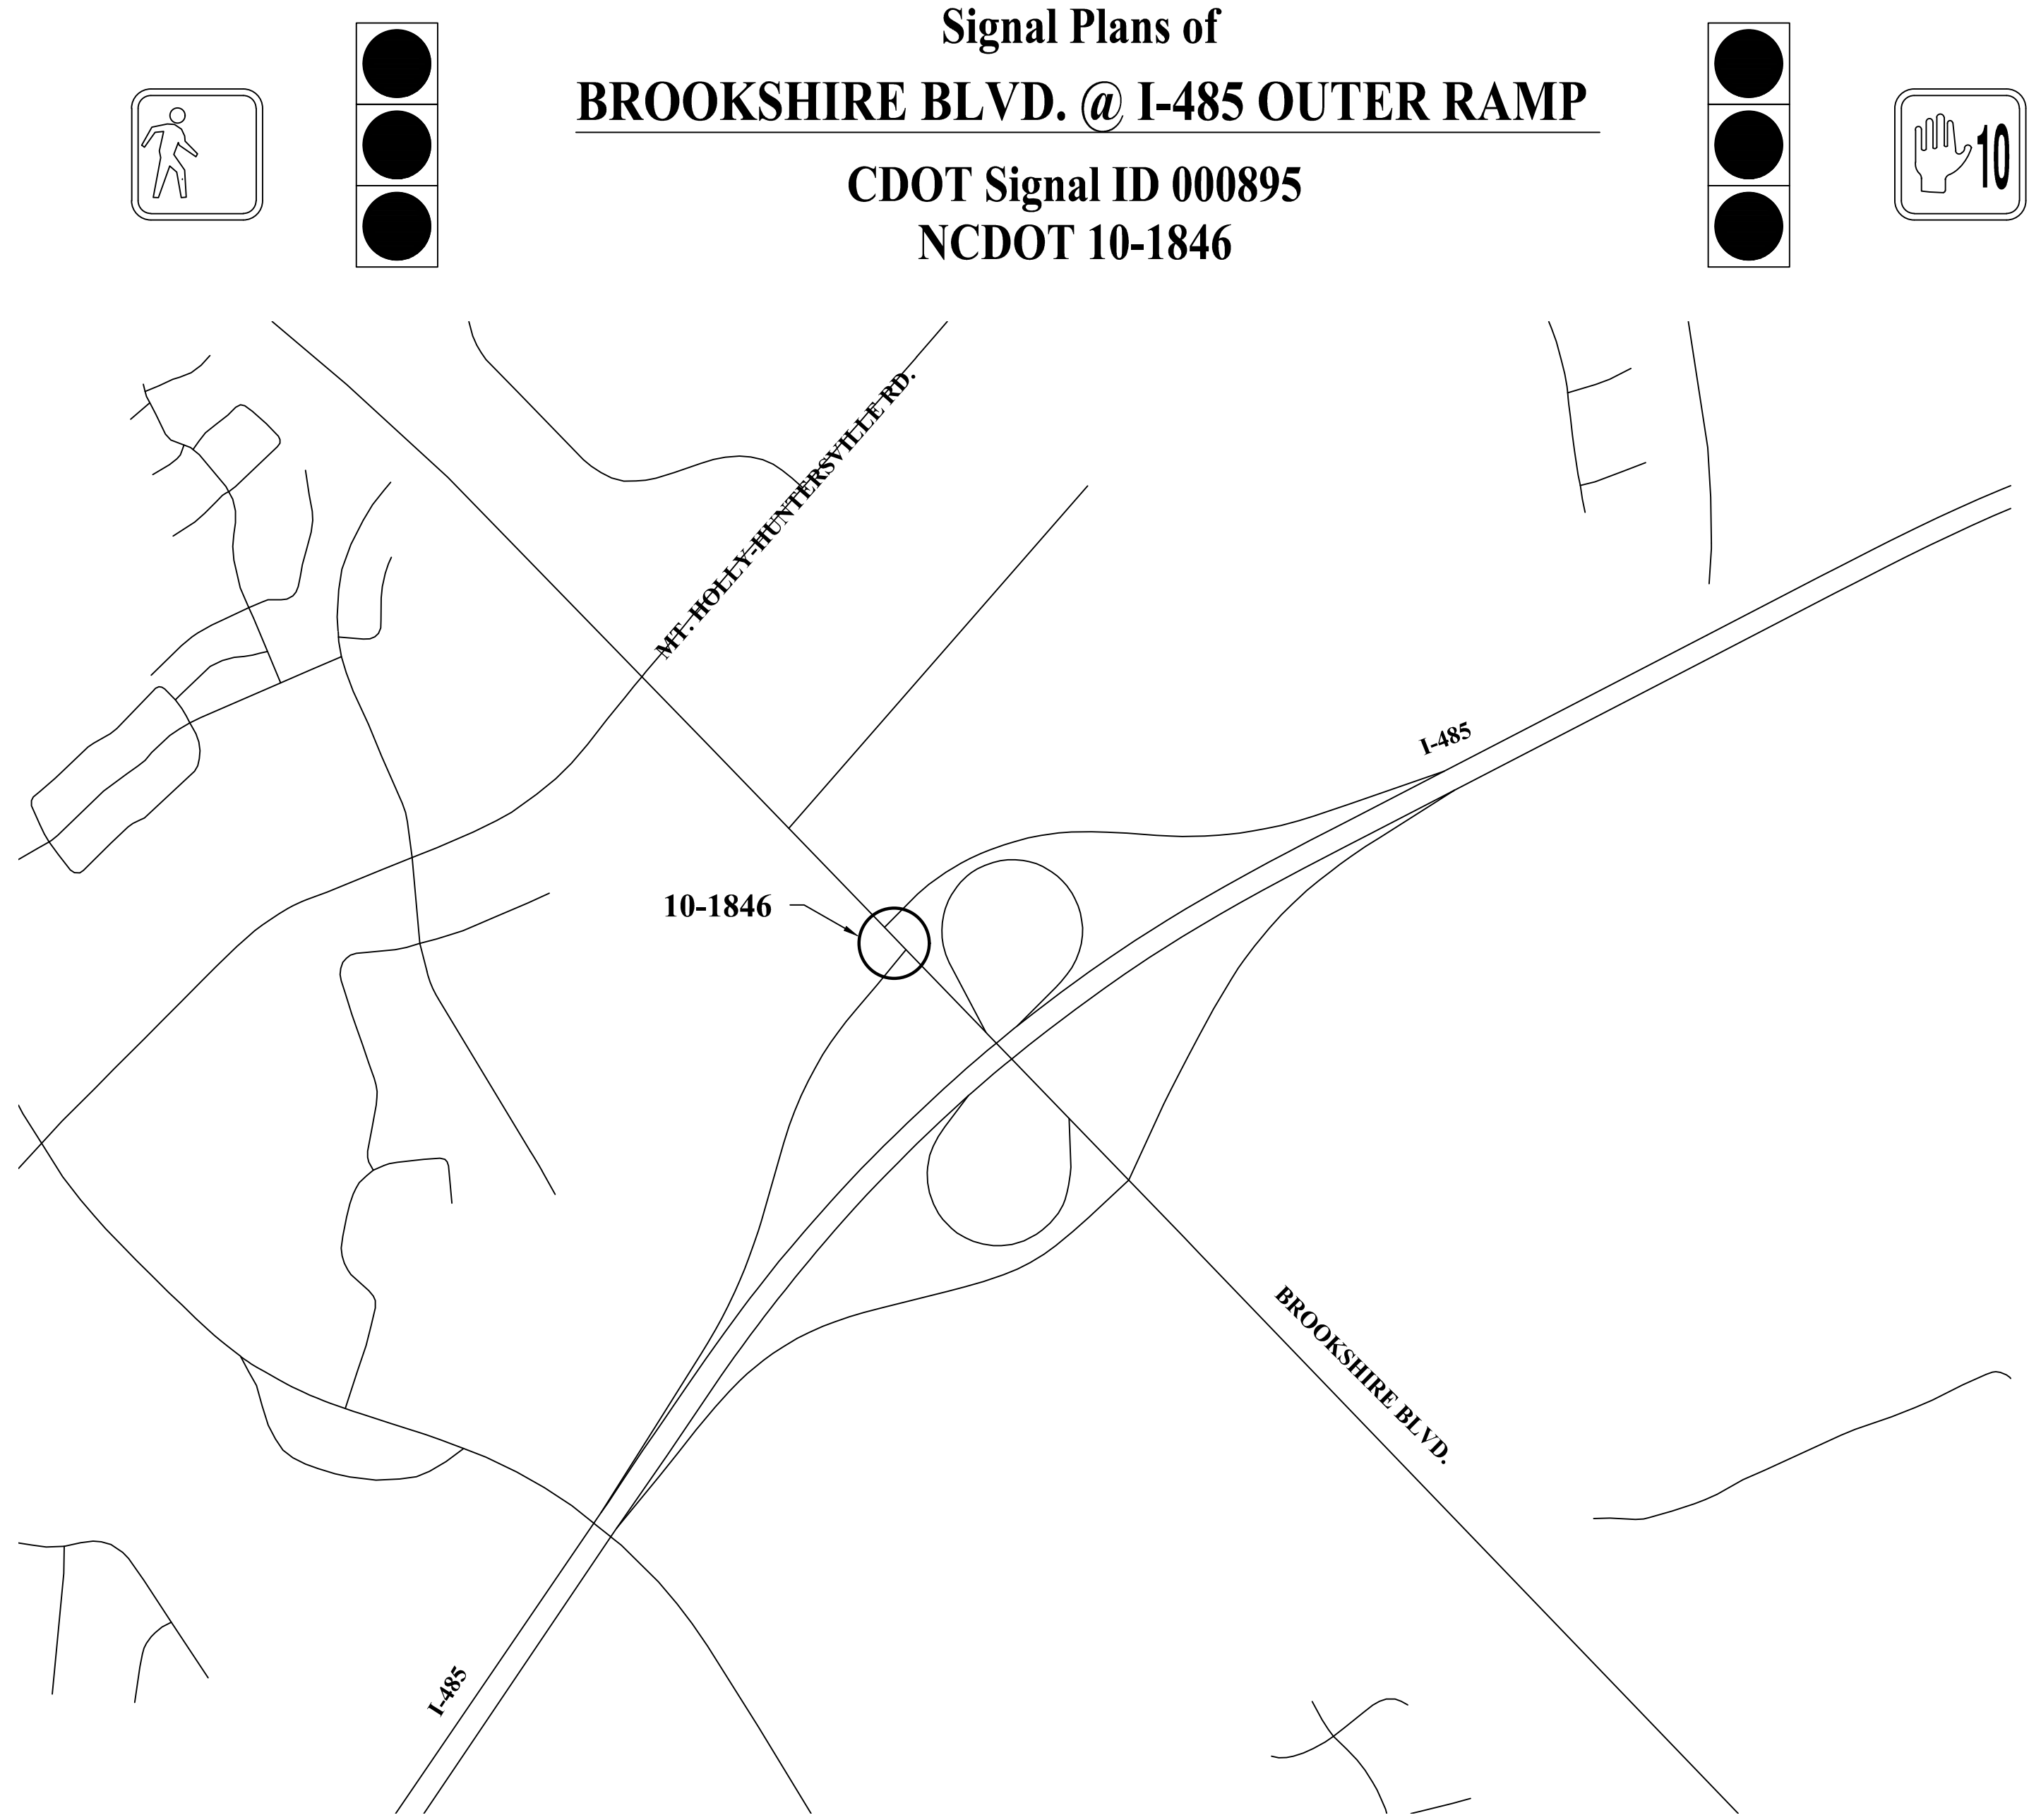

VICINITY MAP (NTS)

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

PROJECT REFERENCE NO.	I-5973
SHEET NO.	SIG. 2.0

LEGEND

PROPOSED	DESCRIPTION	EXISTING
	CONTROL BOX	
	METER PEDESTAL	
	PULL BOX	
	STEEL POLE	
	MAST ARM	
	PED PEDESTAL	
	UTILITY POLE	
	ANCHOR	
	SIGNAL HEAD	
	VIDEO CAMERA	
	OPTICOM	
	OBSERVATION CAM	
	DETECTOR	
	CONDUIT	
	INTERCONNECT	
	EDGE OF PVMT.	
	CURB & GUTTER	
	TUBULAR MARKER	
	GROUND SIGN	
	OVERHEAD SIGN	
	DOUBLE YELLOW	
	STOP BAR	
	WHITE SKIP	
	WHITE MINI	
	PAVEMENT ARROW	
	PROPERTY LINE	
	ROW	

PULLBOX ID

	SIZE	PULLBOX TYPE
①	13"x24"x12"	LOOP
②	17"x30"x24"	FIBER OPTIC
③	24"x36"x24"	CONTROLLER / FIBER
④	30"x48"x36"	CONTROLLER
⑤	24"x24"x12"	CONTROLLER
⑥	36"x36"x12"	CONTROLLER

NOTE: PULLBOX MATERIAL MUST MEET OR EXCEED THE 1998 CDOT TRAFFIC SIGNAL SPECIFICATIONS.

PLANS PREPARED BY:



PLAN NOTES

- ALL PAVEMENT MARKING DIMENSIONS ARE APPROXIMATE.
- SIGNAL SHALL BE INSTALLED IN ACCORDANCE WITH THE LATEST NCDOT STANDARD SPECIFICATIONS AND CDOT TRAFFIC SIGNAL SPECIAL PROVISIONS.
- PED SIGNALS WITH PUSHBUTTONS WILL BE LABELED "PB" (FOR EXAMPLE PB21, PB22)
- COUNTDOWN PEDESTRIAN SIGNALS SHALL COUNT DOWN FLASHING DON'T WALK ONLY.

PE SEAL



DocuSigned by: SL Phillips 2/16/2022

PROJECT TEAM

DESIGNER:	SP PENNINGTON
PROJECT MANAGER:	SL PHILLIPS, P.E.

SHEET 2.0



Signal ID 00895 / NCDOT 10-1846

BROOKSHIRE BLVD. @ I-485 OUTER RAMP