


PROJECT REFERENCE NO.	SHEET NO.
1-5987A	EC-72/CONST.36
RW SHEET NO.	

NV5 NV5 ENGINEERS & CONSULTANTS, INC.
 7500 E. INDEPENDENCE BLVD, STE 100
 CHARLOTTE, NC 28227
 P: 704.537.7300 www.NV5.com
 NC License # F-1333

FINAL EROSION CONTROL
 FOR CONSTRUCTION
 SHEET 36

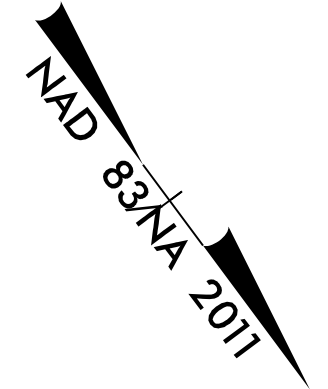

MATCHLINE -SR2- STA. 19+00 SEE SHEET 17

-SR2-
 PI Sta 15+32.16
 $\Delta = 8^{\circ} 30' 53.9" (LT)$
 $D = 2^{\circ} 20' 00.0"$
 $L = 364.93'$
 $T = 182.80'$
 $R = 2,455.53'$
 $DS = EXIST.$
 $e = EXIST.$

MICHAEL LOWERY
 DB 1480 PG 721

SANDRA BLANKS
 DB 639 PG 807

WILLIAM BLANKS
 DB 1273 PG 875

MARY BURNETTE
 DB 2057 PG 126

DITCH BLOCK
 TOP ELEV. = 149.2'
 SEE DETAIL AB

WILLIAM BLANKS
 DB 1273 PG 875

RACHEAL COLLINS
 DB 2079 PG 19

MARY BURNETTE
 DB 2057 PG 126

-SR2- POT Sta. 10+00.00

-SR2- PC Sta. 13+49.36

BEGIN CONSTRUCTION
 -SR2- POC Sta. 16+60.00

-SR2- PT Sta. 17+14.29

BEGIN GRADE
 -SR2- POT Sta. 17+60.00

WILLIAM BLANKS
 DB 1273 PG 875

- NOTE: ALL EROSION CONTROL DEVICES SHOWN ARE LOCATED WITHIN EXISTING RW OR EASEMENT.
- NOTE: CONTRACTOR SHALL PROVIDE GROUND COVER ON EXPOSED SLOPES IN ACCORDANCE WITH THE "SOIL STABILIZATION TIMEFRAMES", SEE EC-3.
- NOTE: CONTRACTOR SHALL PROVIDE INLET PROTECTION FOR PARTIALLY INSTALLED STORM DRAINS. THIS MEASURE SHOULD BE INSTALLED AT THE END OF EACH WORKING DAY.
- NOTE: CONTRACTOR SHALL MAINTAIN ALL DEVICES AS PROJECT IS BROUGHT UP TO GRADE.
- NOTE: INSTALL MATTING FOR EROSION CONTROL IN ALL PROPOSED DITCH LINES EXCEPT WHERE PERMANENT LINERS ARE SPECIFIED ON THE PLANS OR DIRECTED OTHERWISE BY THE ENGINEER.

FOR -SR2- PROFILE SEE SHEET 76
 FOR DITCH DETAILS SEE SHEETS 2D-1 AND 2D-2

REVISIONS

8/17/99
 4/7/2022
 R:\Environmental\Design\15987A_EC_PSH_072.dgn
 samuel.skalata