


SEE DRAWING 2

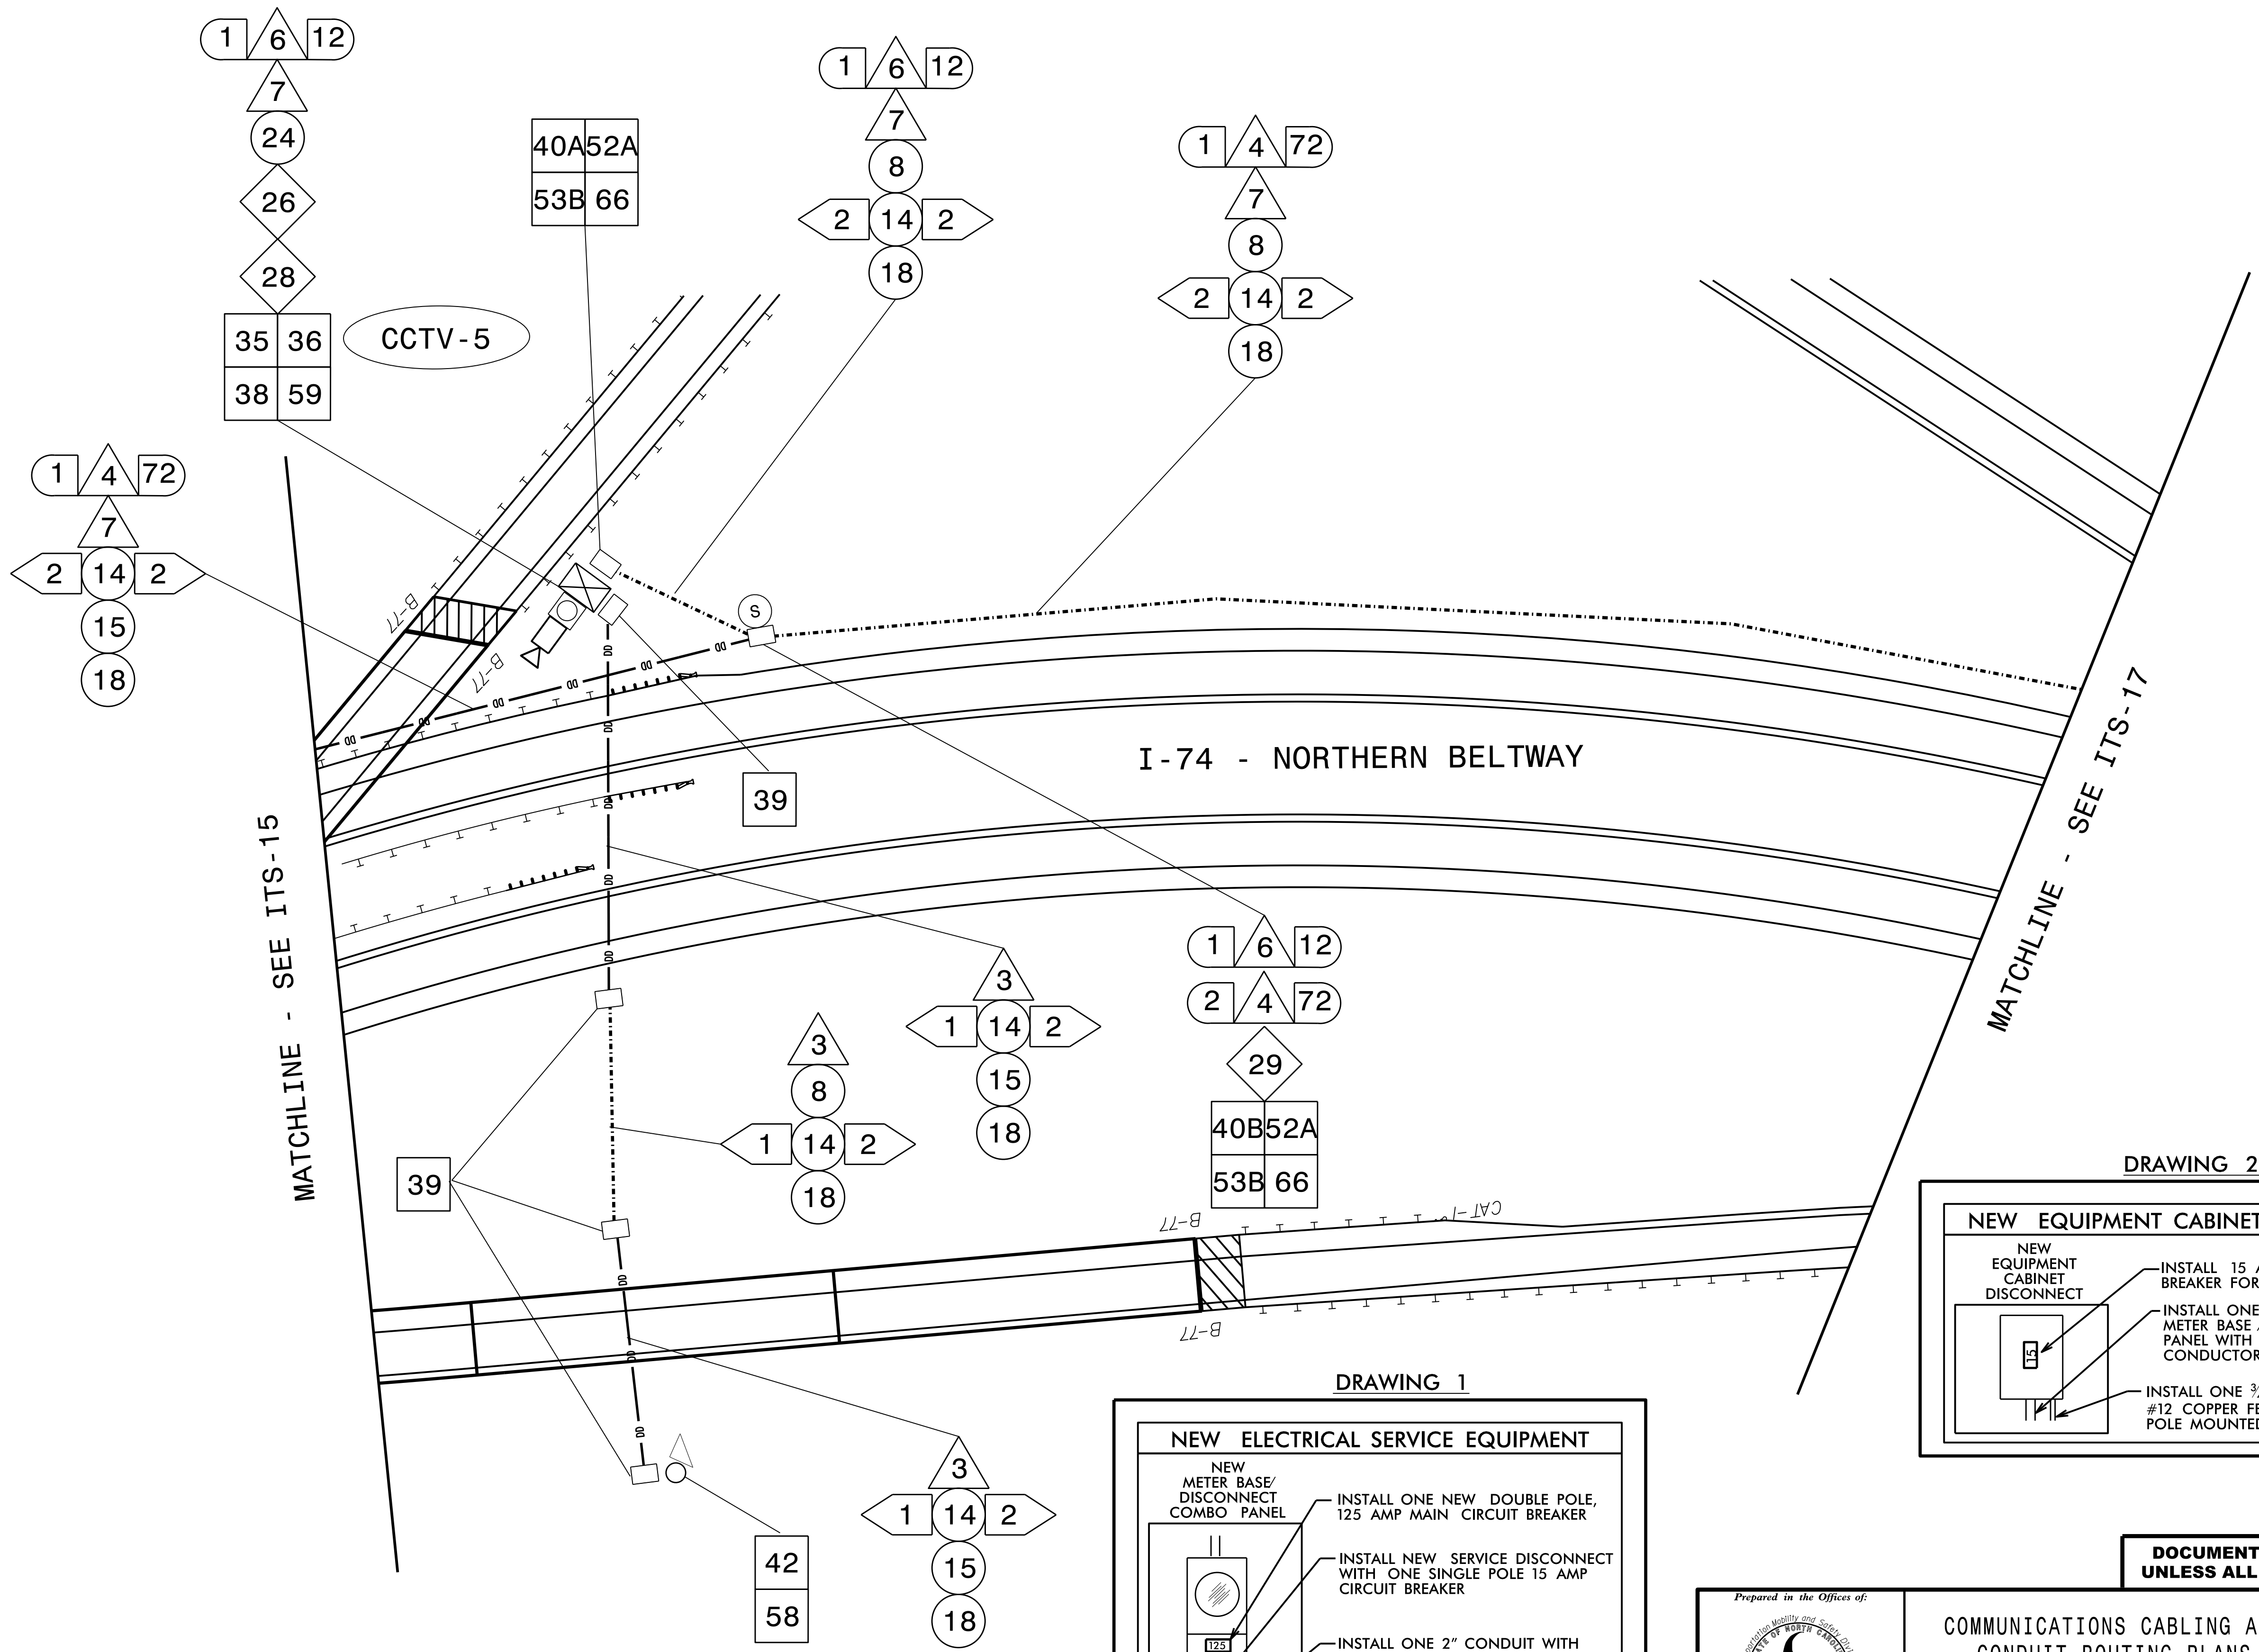

MATCHLINE - SEE ITS-15

MATCHLINE - SEE ITS-17

I-74 - NORTHERN BELTWAY

DRAWING 2

**NEW EQUIPMENT CABINET DISCONNECT**

- INSTALL 15 AMP CIRCUIT BREAKER FOR CCTV
- INSTALL ONE 2" CONDUIT FROM METER BASE / DISCONNECT COMBO PANEL WITH #4 COPPER FEEDER CONDUCTORS
- INSTALL ONE 3/4" CONDUIT WITH THREE #12 COPPER FEEDER CONDUCTORS TO POLE MOUNTED CCTV CABINET

DRAWING 1

**NEW ELECTRICAL SERVICE EQUIPMENT**


- INSTALL ONE NEW DOUBLE POLE, 125 AMP MAIN CIRCUIT BREAKER
- INSTALL NEW SERVICE DISCONNECT WITH ONE SINGLE POLE 15 AMP CIRCUIT BREAKER
- INSTALL ONE 2" CONDUIT WITH THREE #4 COPPER FEEDER CONDUCTORS TO EQUIPMENT CABINET DISCONNECT AT CCTV-5

SEE DRAWING 1

**NOTES**

- OBTAIN FINAL CCTV LOCATION APPROVAL FROM THE INCIDENT MANAGEMENT ENGINEER (336-315-7080) BEFORE INITIATING ANY WORK AT THIS LOCATION.

**DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED**

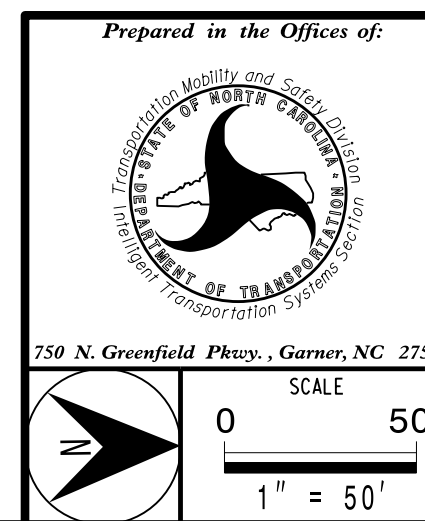

COMMUNICATIONS CABLING AND CONDUIT ROUTING PLANS	
DIVISION 09	FORSYTH CO., WINSTON-SALEM
PLAN DATE: MARCH 2022	REVIEWED BY: A. SKUCE
PREPARED BY: J. WALDEN	REVIEWED BY:
REVISIONS	INIT. DATE

