


CCTV 1207 GPS COORDINATES

35.91099 N
-78.72815 W

CCTV 1207.5 GPS COORDINATES

35.91257 N
-78.72814 W

INSTALL THE FOLLOWING	
QUANTITY	DESCRIPTION
1	DIGITAL CCTV CAMERA ** SEE NOTE 6 & 7 **

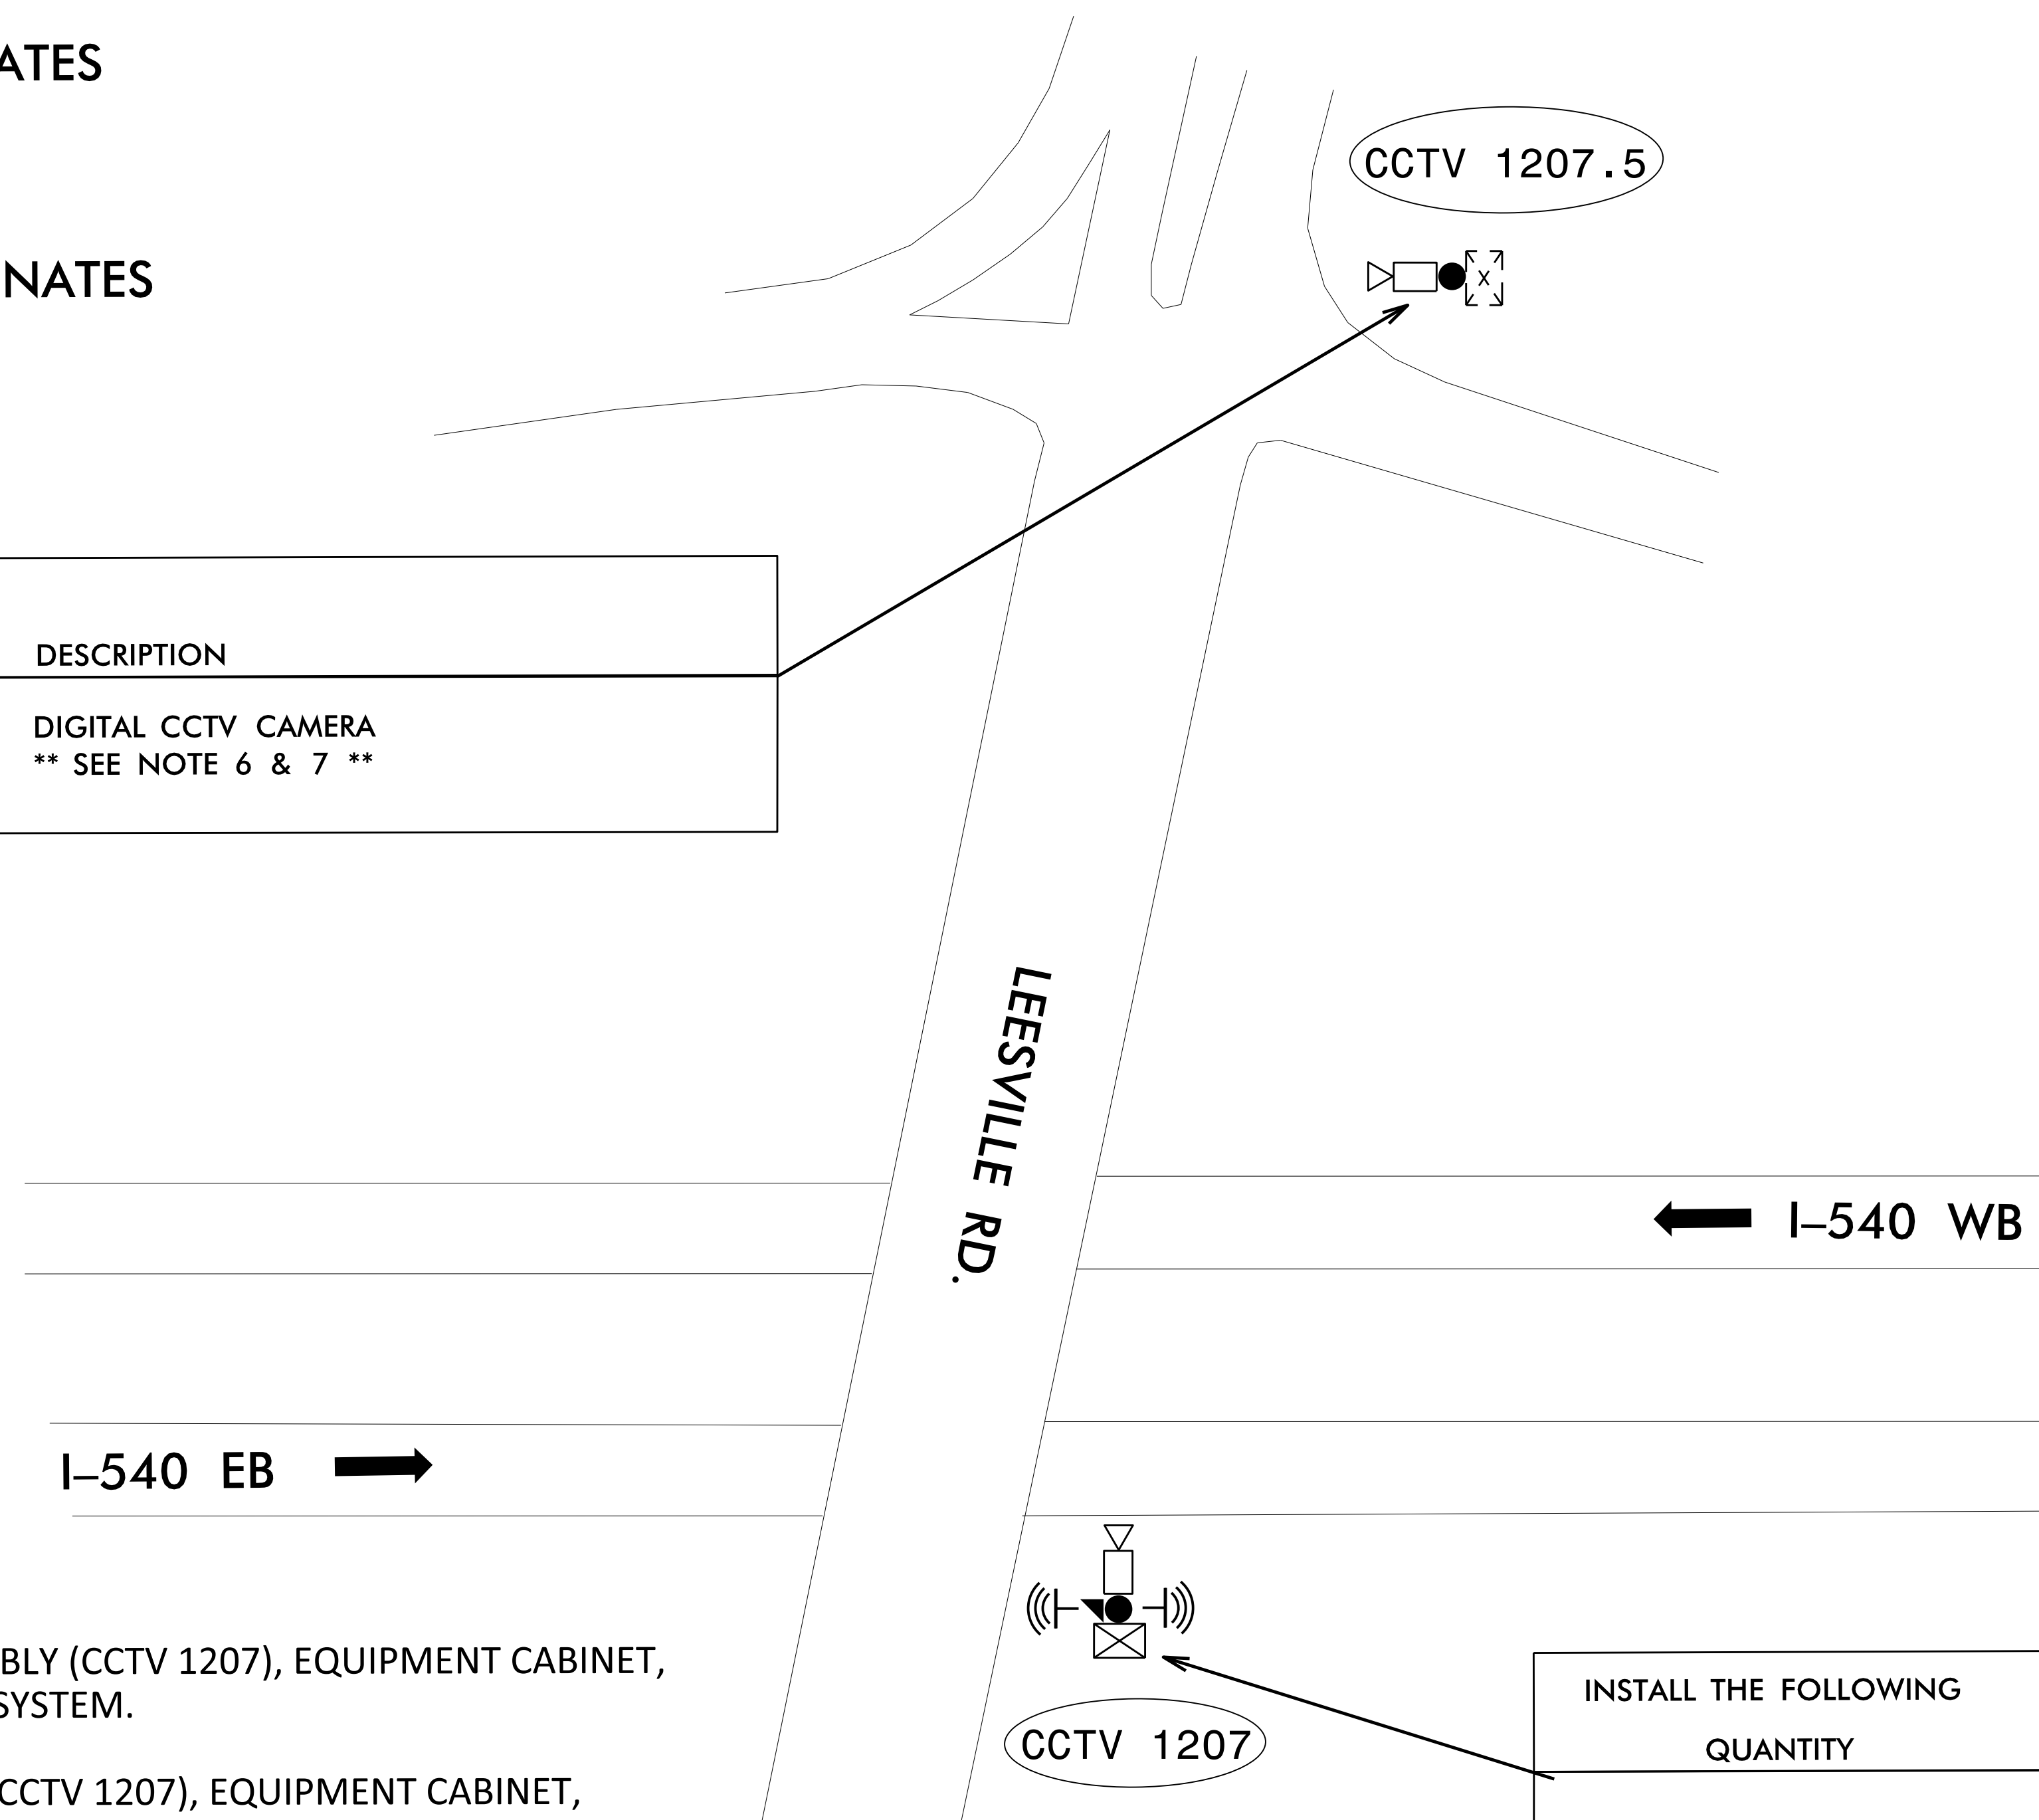

NOTES

1. REMOVE EXISTING CCTV CAMERA ASSEMBLY (CCTV 1207), EQUIPMENT CABINET, INTERCONNECT CENTER, AND WIRELESS SYSTEM.
2. INSTALL NEW CCTV CAMERA ASSEMBLY (CCTV 1207), EQUIPMENT CABINET, INTERCONNECT CENTER, AND WIRELESS SYSTEM ON EXISTING CCTV WOOD POLE.
3. RELOCATE EXISTING ETHERNET SWITCH INTO NEW EQUIPMENT CABINET.
4. REMOVE EXISTING CELL MODEM AT CCTV 1207 AND RETURN TO DIVISION 5 REGIONAL ITS ENGINEER (919-825-2635). RETAIN EXISTING CELL MODEM AT CCTV 1207.5.
5. ENSURE EXISTING FIBER OPTIC CABLE CONNECTIONS ARE LABELED BEFORE DISCONNECTING. RESPLICE OR RECONNECT FIBER OPTIC CABLE BASED ON EXISTING TERMINATION CONFIGURATION. WORK IS NOT COMPLETE UNTIL ALL FIBER OPTIC COMMUNICATIONS ARE OPERATIONAL.
6. CONTRACTOR SHALL MAINTAIN AND RE-USE EXISTING ELECTRICAL SERVICE AND FEEDER CONDUCTORS.
7. REMOVE EXISTING CCTV CAMERA (CCTV 1207.5).
8. INSTALL NEW CCTV CAMERA (CCTV 1207.5) ON EXISTING CCTV WOOD POLE.

INSTALL THE FOLLOWING	
QUANTITY	DESCRIPTION
1	DIGITAL CCTV CAMERA ASSEMBLY
1	FIELD EQUIPMENT CABINET
1	WIRELESS ETHERNET SYSTEM
1	INTERCONNECT CENTER
1	MODIFY EXISTING ELECTRICAL SERVICE

MM 7

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

	ITS DEVICE REPLACEMENT	
	DIVISION 05 WAKE CO.	
750 N. Greenfield Pkwy., Garner, NC 27529 SCALE:	PLAN DATE: AUGUST 2021 PREPARED BY: J. WALDEN	REVIEWED BY: A. J. SKUCE, PE. REVIEWED BY:
REVISIONS: _____ INIT.: _____ DATE: _____	SEAL NORTH CAROLINA PROFESSIONAL ENGINEER ANDREW J. SKUCE 050152 8/11/2021	